

## Quad RS-485/RS-422 Line Drivers


- RS-485 or RS-422 Applications
- Quad Differential Line Drivers
- Tri-state Output Control
- 40ns Typical Driver Propagation Delays
- 5ns Skew
- -7V to +12V Common Mode Output Range
- 100 $\mu$ A Supply Current
- Single +5V Supply Operation
- Pin Compatible with SN75172, SN75174, LTC486, and LTC487



Now available in Lead Free

### DESCRIPTION...

The **SP486** and **SP487** are low-power quad differential line drivers meeting RS-485 and RS-422 standards. The **SP486** features a common driver enable control; the **SP487** provides independent driver enable controls for each pair of drivers. Both feature tri-state outputs and wide common-mode input range. Both are available in 16-pin plastic DIP and SOIC packages.

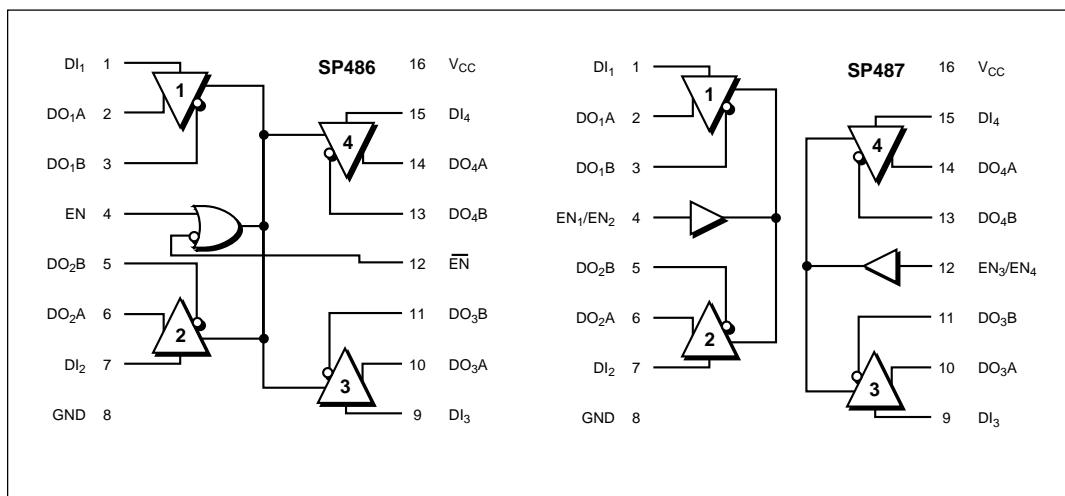

## ABSOLUTE MAXIMUM RATINGS

These are stress ratings only and functional operation of the device at these or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.


$V_{CC}$	.....	+7V
Input Voltages		
Logic	.....	-0.5V to ( $V_{CC}$ + 0.5V)
Drivers	.....	-0.5V to ( $V_{CC}$ + 0.5V)
Driver Output Voltage	.....	±14V
Input Currents		
Logic	.....	±25mA
Driver	.....	±25mA
Storage Temperature	.....	-65°C to +150°C
Power Dissipation		
Plastic DIP	.....	375mW
(derate 7mW/°C above +70°C)	.....	
Small Outline	.....	375mW
(derate 7mW/°C above +70°C)	.....	
Lead Temperature (soldering, 10 sec)	.....	300°C

## SPECIFICATIONS

$V_{CC} = 5V \pm 5\%$ ; typicals at 25°C;  $T_{MIN} \leq T_A \leq T_{MAX}$  unless otherwise noted.

PARAMETER	MIN.	TYP.	MAX.	UNIT	CONDITIONS
<b>DC CHARACTERISTICS</b>					
Digital Inputs					
Voltage					
$V_{IL}$	2.0		0.8	Volts	
$V_{IH}$			±2	Volts	
Input Current				µA	$V_{IN} = 0V$ to $V_{CC}$
<b>DRIVER OUTPUTS</b>					
Differential Voltage	2	1.5	2	Volts	$I_O = 0$ ; unloaded
				Volts	$R_L = 50\Omega$ (RS-422)
Change in Output Magnitude for Complementary Output State			5	Volts	$R_L = 27\Omega$ (RS-485); Fig. 1
Common Mode Output Voltage		2.3	5	Volts	$R_L = 27\Omega$ or 50Ω ; Fig. 1
Change in Common Mode Output Magnitude for Complementary Output State			0.2	Volts	
Maximum Data Rate	10			Mbps	
Short-circuit Current					
$V_{OH}$			±250	mA	$-7V \leq V_O \leq +10V$
$V_{OL}$			±250	mA	$-7V \leq V_O \leq +10V$
High Impedance Output Current	±2		±200	µA	$V_O = -7V$ to +10V
<b>POWER REQUIREMENTS</b>					
Supply Voltage	4.75	5.00	5.25	Volts	
Supply Current		0.5	10	µA	No load, output enabled
		0.5	10	µA	No load, output disabled
<b>ENVIRONMENTAL AND MECHANICAL</b>					
Operating Temperature					
-C	0		+70	°C	
-E	-40		+85	°C	
Storage Temperature					
-65			+150	°C	
Package					
-S		16-pin Plastic DIP			
-T		16-pin SOIC			

## PINOUT — SP486

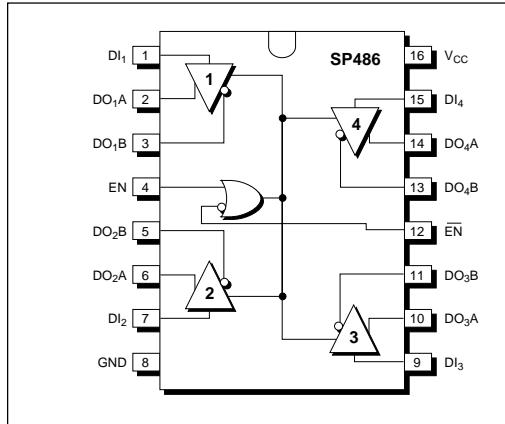

## SP486 PINOUT

Pin 1 —  $DI_1$  — Driver 1 Input — If Driver 1 output is enabled, logic 0 on  $DI_1$  forces driver output  $DO_1A$  low and  $DO_1B$  high. A logic 1 on  $DI_1$  with Driver 1 output enabled forces driver  $DO_1A$  high and  $DO_1B$  low.

Pin 2 —  $DO_1A$  — Driver 1 output A.

Pin 3 —  $DO_1B$  — Driver 1 output B.

Pin 4 — EN — Driver Output Enable. Please refer to SP486 *Truth Table (1)*.

Pin 5 —  $DO_2B$  — Driver 2 output B.

Pin 6 —  $DO_2A$  — Driver 2 output A.

Pin 7 —  $DI_2$  — Driver 2 Input — If Driver 2 output is enabled, logic 0 on  $DI_2$  forces driver output  $DO_2A$  low and  $DO_2B$  high. A logic 1 on  $DI_2$  with Driver 2 output enabled forces driver  $DO_2A$  high and  $DO_2B$  low.

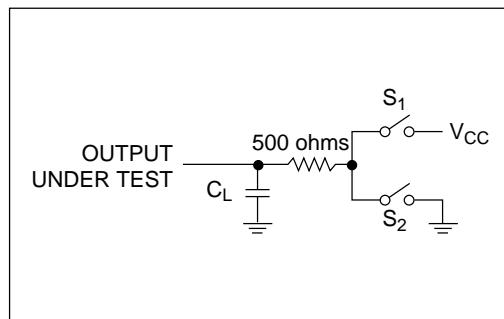


Figure 3. Driver Timing Test Load

Pin 8 — GND — Digital Ground.

Pin 9 —  $DI_3$  — Driver 3 Input — If Driver 3 output is enabled, logic 0 on  $DI_3$  forces driver output  $DO_3A$  low and  $DO_3B$  high. A logic 1 on  $DI_3$  with Driver 3 output enabled forces driver  $DO_3A$  high and  $DO_3B$  low.

Pin 10 —  $DO_3A$  — Driver 3 output A.

Pin 11 —  $DO_3B$  — Driver 3 output B.

Pin 12 —  $\overline{EN}$  — Driver Output Disable. Please refer to SP486 *Truth Table (1)*.

Pin 13 —  $DO_4B$  — Driver 4 output B.

Pin 14 —  $DO_4A$  — Driver 4 output A.

Pin 15 —  $DI_4$  — Driver 4 Input — If Driver 4 output is enabled, logic 0 on  $DI_4$  forces driver output  $DO_4A$  low and  $DO_4B$  high. A logic 1 on  $DI_4$  with Driver 3 output enabled forces driver  $DO_4A$  high and  $DO_4B$  low.

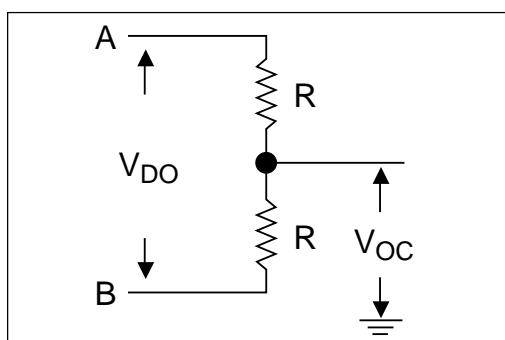


Figure 1. Driver DC Test Load


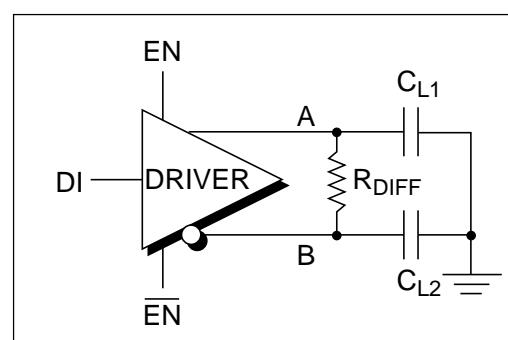


Figure 2. Driver Timing Test

## PINOUT — SP487

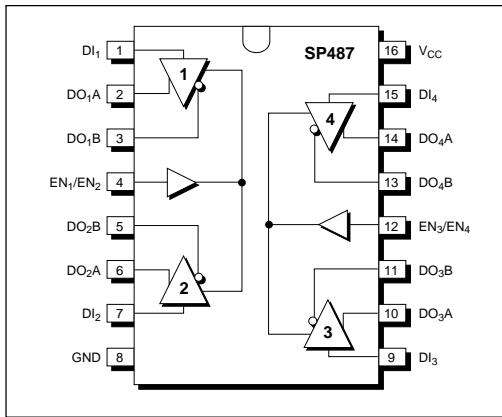

Pin 16 — Supply Voltage V<sub>CC</sub> — 4.75V ≤ V<sub>CC</sub> ≤ 5.25V.

### SP487 PINOUT

Pin 1 — DI<sub>1</sub> — Driver 1 Input — If Driver 1 output is enabled, logic 0 on DI<sub>1</sub> forces driver output DO<sub>1</sub>A low and DO<sub>1</sub>B high. A logic 1 on DI<sub>1</sub> with Driver 1 output enabled forces driver DO<sub>1</sub>A high and DO<sub>1</sub>B low.

Pin 2 — DO<sub>1</sub>A — Driver 1 output A.

Pin 3 — DO<sub>1</sub>B — Driver 1 output B.

Pin 4 — EN<sub>1</sub>/EN<sub>2</sub> — Driver 1 and 2 Output Enable. Please refer to SP487 Truth Table (2).

Pin 5 — DO<sub>2</sub>B — Driver 2 output B.

Pin 6 — DO<sub>2</sub>A — Driver 2 output A.

Pin 7 — DI<sub>2</sub> — Driver 2 Input — If Driver 2 output is enabled, logic 0 on DI<sub>2</sub> forces driver output DO<sub>2</sub>A low and DO<sub>2</sub>B high. A logic 1 on DI<sub>2</sub> with Driver 2 output enabled forces driver DO<sub>2</sub>A high and DO<sub>2</sub>B low.

Pin 8 — GND — Digital Ground.

Pin 9 — DI<sub>3</sub> — Driver 3 Input — If Driver 3 output is enabled, logic 0 on DI<sub>3</sub> forces driver output DO<sub>3</sub>A low and DO<sub>3</sub>B high. A logic 1 on DI<sub>3</sub> with Driver 3 output enabled forces driver DO<sub>3</sub>A high and DO<sub>3</sub>B low.

Pin 10 — DO<sub>3</sub>A — Driver 3 output A.

INPUT	ENABLES		OUTPUTS		
	DI	EN	EN̄	OUTA	OUTB
H	H	X	X	H	L
L	H	X	X	L	H
H	X	L	X	H	L
L	X	L	X	L	H
X	L	H	H	Hi-Z	Hi-Z

Table 1. SP486 Truth Table

Pin 11 — DO<sub>3</sub>B — Driver 3 output B.

Pin 12 — EN<sub>3</sub>/EN<sub>4</sub> — Driver 3 and 4 Output Enable. Please refer to SP487 Truth Table (2).

Pin 13 — DO<sub>4</sub>B — Driver 4 output B.

Pin 14 — DO<sub>4</sub>A — Driver 4 output A.

Pin 15 — DI<sub>4</sub> — Driver 4 Input — If Driver 4 output is enabled, logic 0 on DI<sub>4</sub> forces driver output DO<sub>4</sub>A low and DO<sub>4</sub>B high. A logic 1 on DI<sub>4</sub> with Driver 3 output enabled forces driver DO<sub>4</sub>A high and DO<sub>4</sub>B low.

Pin 16 — Supply Voltage V<sub>CC</sub> — 4.75V ≤ V<sub>CC</sub> ≤ 5.25V.

### FEATURES...

The SP486 and SP487 are low-power quad differential line drivers meeting RS-485 and RS-422 standards. The SP486 features active high and active low common driver enable controls; the SP487 provides independent, active high driver enable controls for each pair of drivers. The driver outputs are short-circuit limited to 200mA. Data rates up to 10Mbps are supported. Both are available in 16-pin plastic DIP and SOIC packages.

INPUT	ENABLES		OUTPUTS	
	DI	EN1/EN2 or EN3/EN4	OUTA	OUTB
H	H	H	H	L
L	H	H	L	H
X	L	H	Hi-Z	Hi-Z

Table 2. SP487 Truth Table

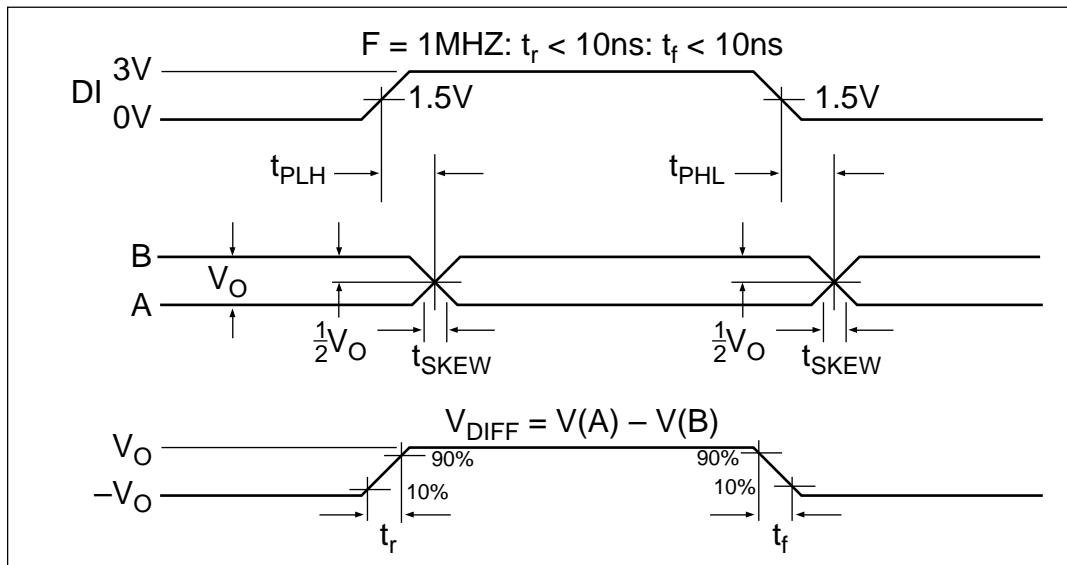


Figure 4. Driver Propagation Delays

## AC PARAMETERS

$V_{cc} = 5V \pm 5\%$ ; typicals at  $25^\circ\text{C}$ ;  $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$  unless otherwise noted.

PARAMETER	MIN.	TYP.	MAX.	UNIT	CONDITIONS
<b>PROPAGATION DELAY</b>					
Driver Input to Output					$R_{DIFF} = 54 \text{ Ohms}, C_{L1} = C_{L2} = 100\text{pF}$ ; Figure 2
Low to High ( $t_{PLH}$ )	20	40	60	ns	
High to Low ( $t_{PHL}$ )	20	40	60	ns	
Driver Output to Output ( $t_{SKEW}$ )		5	15	ns	
Driver Rise Time ( $t_r$ )				ns	10% to 90%
SP486		20		ns	
SP487		20		ns	
Driver Fall Time ( $t_f$ )				ns	90% to 10%
SP486		20		ns	
SP487		20		ns	
<b>DRIVER ENABLE</b>					
To Output High		60	110	ns	$C_L = 100\text{pF}$ ; Figures 3 and 5 ( $S_2$ closed)
To Output Low		60	115	ns	$C_L = 100\text{pF}$ ; Figures 3 and 5 ( $S_1$ closed)
<b>DRIVER DISABLE</b>					
From Output Low		60	130	ns	$C_L = 15\text{pF}$ ; Figures 3 and 5 ( $S_1$ closed)
From Output High		60	130	ns	$C_L = 15\text{pF}$ ; Figures 3 and 5 ( $S_2$ closed)

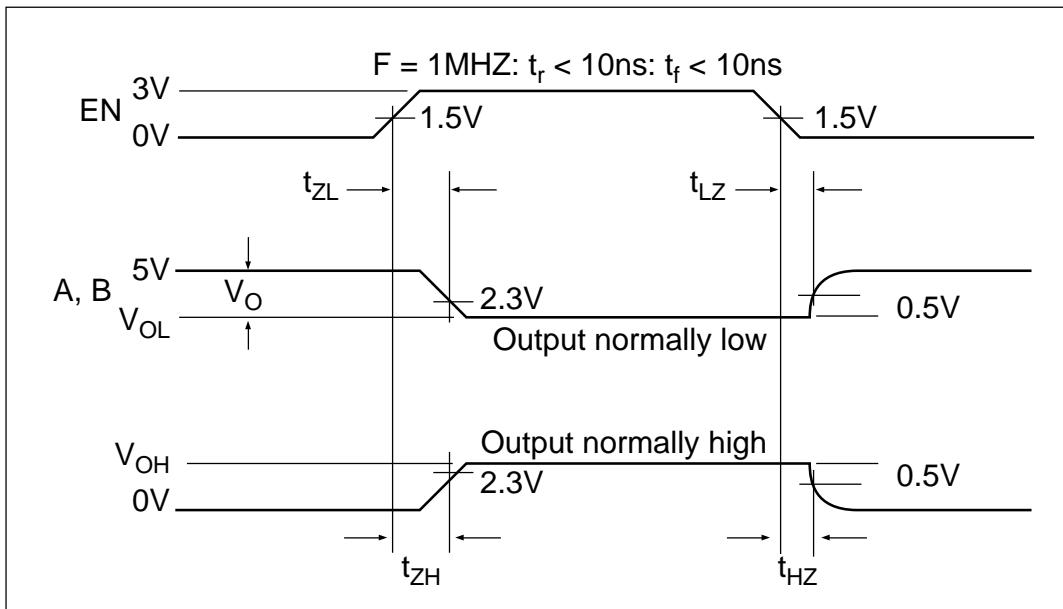


Figure 5. Driver Enable/Disable Timing

### ORDERING INFORMATION

#### Quad RS485 Drivers:

Model .....	Enable/Disable .....	Temperature Range .....	Package .....
SP486CS .....	Common; active Low and Active High .....	0°C to +70°C .....	16-pin Plastic DIP
SP486CT .....	Common; active Low and Active High .....	0°C to +70°C .....	16-pin SOIC
SP486ES .....	Common; active Low and Active High .....	-40°C to +85°C .....	16-pin Plastic DIP
SP486ET .....	Common; active Low and Active High .....	-40°C to +85°C .....	16-pin SOIC
SP487CS .....	One per driver pair; active High .....	0°C to +70°C .....	16-pin Plastic DIP
SP487CT .....	One per driver pair; active High .....	0°C to +70°C .....	16-pin SOIC
SP487ES .....	One per driver pair; active High .....	-40°C to +85°C .....	16-pin Plastic DIP
SP487ET .....	One per driver pair; active High .....	-40°C to +85°C .....	16-pin SOIC

Now available in Lead Free. To order add "-L" to the part number.  
Example: SP488A = normal, SP488A-L = Lead free



SIGNAL PROCESSING EXCELLENCE

**Sipex Corporation**

**Headquarters and Sales Office**  
22 Linnell Circle  
Billerica, MA 01821  
TEL: (978) 667-8700  
FAX: (978) 670-9001  
e-mail: sales@sipex.com

**Sales Office**  
233 South Hillview Drive  
Milpitas, CA 95035  
TEL: (408) 934-7500  
FAX: (408) 935-7600

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

---

**www.BDTIC.com/Exar/**

---