## MZ9313 / MZ9313C



### **Triple-Balanced Mixer**

Rev. V3

### **Features**

- LO 2 TO 18 GHz
- RF 2 TO 18 GHz
- IF 0.03 TO 5 GHz
- LO DRIVE: +13 dBm (NOMINAL)
- MINIATURE PACKAGE
- WIDE BANDWIDTH
- AVAILABLE WITH FIELD REPLACEABLE CONNECTORS


### Description

The MZ9313 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.

### **Ordering Information**

Part Number	Package
MZ9313	Versapac
MZ9313C	SMA Connectorized

### **Product Image**

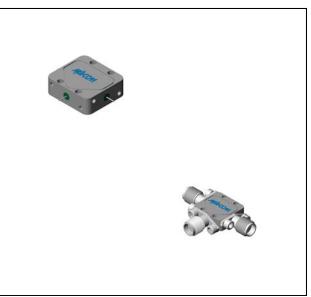

### Electrical Specifications: $Z_0 = 50\Omega$ Lo = +13 dBm (Downconverter application only)

Dorometer	Test Conditions	Unito	Typical	Guaranteed	
Parameter Test Conditions		Units		+25°C	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 4 to 18 GHz, fL = 2 to 18 GHz, fI = 0.03 to 3 GHz fR = 2 to 18 GHz, fL = 2 to 18 GHz, fI = 0.03 to 5 GHz	dB dB	6.5 7.5	9.0 10.5	9.5 11.0
Isolation, L to R (min)	fL = 2 to 4 GHz fL = 4 to 18 GHz	dB dB	17 30	12 15	10 13
Isolation, L to I (min)	fL = 2 to 18 GHz	dB	30	17	15
1 dB Conversion Comp.	fL = +13 dBm	dBm	+8		
Input IP3	fR1 = 3 GHz at -10 dBm, fR2 = 3.01 GHz at -10 dBm, fL = 5 GHz at +13 dBm fR1 = 17.99 GHz at -10 dBm, fR2 = 18 GHz at -10 dBm, fL = 14 GHz at +13 dBm	dBm dBm	+19 +15		

Solutions has under development. Performance is based on engineering tests. Specifications are

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not gui

<sup>•</sup> North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

India Tel: +91.80.4155721
 China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.




### **Triple-Balanced Mixer**


Rev. V3

### **Typical Performance Curves**


### Conversion vs. LO Power

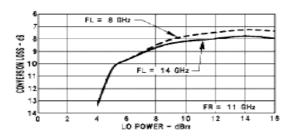



### Conversion vs. Frequency

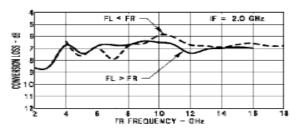


### Conversion vs. Frequency

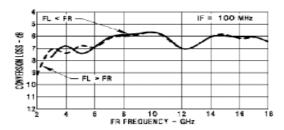

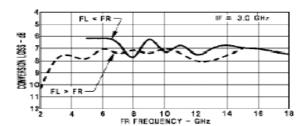


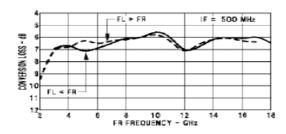

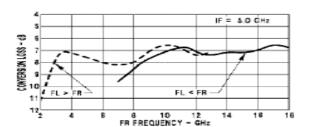

# IF = 1.0 GHz CONVERSION LOSS -- dB

### L-Port VSWR vs. Frequency

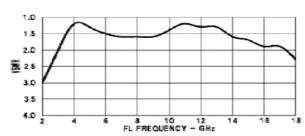

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not gua

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400 • India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.

# MZ9313 / MZ9313C





### **Triple-Balanced Mixer**

Rev. V3


### **Absolute Maximum Ratings**

Parameter	Absolute Maximum		
Operating Temperature	-54°C to +100°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+26 dBm max @ +25°C +23 dBm max @ +100°C		
Peak Input Current	mA DC		

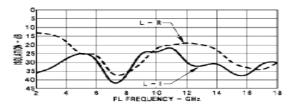

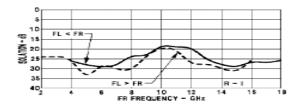


### R-Port VSWR vs. Frequency

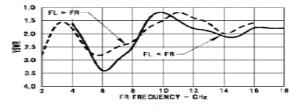


I-Port VSWR vs. Frequency

Commitment to produce in volume is not du

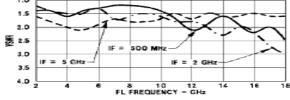


### **Outline Drawing: Versapac**

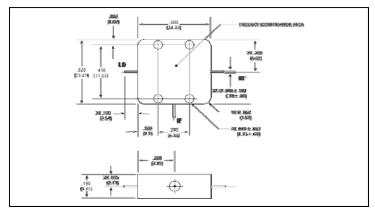

Weight: 4 grams (0.14 oz.) max

## Outline Drawing: SMA Connectorized \*

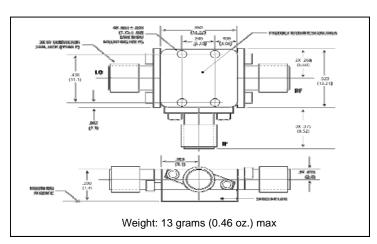

Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
  - China Tel: +86.21.2407.1588

iormation contained herein without notice.