

# LME49722

*LME49722 Low Noise, High Performance, High Fidelity Dual Audio Operational Amplifier*




Literature Number: SNAS454

[www.BDTIC.com/TI](http://www.BDTIC.com/TI)



# Connection Diagram

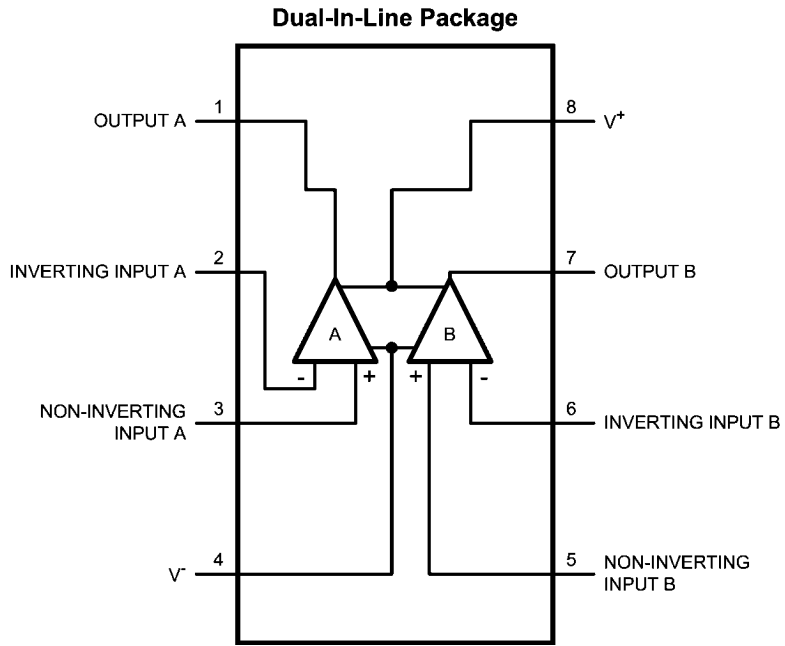

Order Number LME49722MA  
See NS Package Number — M08A

30057955

**Absolute Maximum Ratings** (Notes 1, 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

|  |                            |
|--|----------------------------|
| Supply Voltage ( $V_S = V_{CC} - V_{EE}$ ) | 38V                        |
| Storage Temperature                        | -65°C to 150°C             |
| Input Voltage                              | (V-) - 0.7V to (V+) + 0.7V |
| Output Short Circuit (Note 3)              | Continuous                 |
| ESD Susceptibility (Note 4)                | 2000V                      |
| ESD Susceptibility (Note 5)                | 200V                       |

|                                     |         |
|-------------------------------------|---------|
| Junction Temperature ( $T_{JMAX}$ ) | 150°C   |
| Thermal Resistance                  |         |
| $\theta_{JA}$                       | 154°C/W |
| $\theta_{JC}$                       | 27°C/W  |

**Operating Ratings**

|                                 |                                  |
|---------------------------------|----------------------------------|
| Temperature Range               |                                  |
| $T_{MIN} \leq T_A \leq T_{MAX}$ | -40°C $\leq$ $T_A$ $\leq$ 85°C   |
| Supply Voltage Range            | $\pm 2.5V \leq V_S \leq \pm 18V$ |

**Electrical Characteristics for the LME49722** (Notes 1, 2) The following specifications apply for  $V_S = \pm 15V$  and  $\pm 18V$ ,  $R_L = 2k\Omega$ ,  $f_{IN} = 1kHz$  unless otherwise specified. Limits apply for  $T_A = 25^\circ C$ ,

| Symbol                      | Parameter                               | Conditions   | LME49722           |           | Units (Limits)                       |
|-----------------------------|---|--|--------------------|-----------|--------------------------------------|
|                             |   |  | Typical            | Limit     |                                      |
|                             |   |  | (Note 6)           | (Note 7)  |                                      |
| THD+N                       | Total Harmonic Distortion + Noise       | $A_V = 1$ , $V_{OUT} = 3V_{rms}$<br>$R_L = 2k\Omega$<br>$R_L = 600\Omega$      | 0.00002<br>0.00002 | 0.00009   | %<br>% (max)                         |
| IMD                         | Intermodulation Distortion              | $A_V = 1$ , $V_{OUT} = 3V_{RMS}$<br>Two-tone, 60Hz & 7kHz 4:1                  | 0.00002            |           | %                                    |
| GBWP                        | Gain Bandwidth Product                  | $f_{IN} = 100kHz$  | 55                 | 45        | MHz (min)                            |
| SR                          | Slew Rate                               | $A_V = 1$ , $V_{OUT} = 10V_{P-P}$  | $\pm 22$           | $\pm 15$  | V/ $\mu s$ (min)                     |
| FPBW                        | Full Power Bandwidth                    | $V_{OUT} = 1V_{P-P}$ , -3dB<br>referenced to output magnitude<br>at $f = 1kHz$ | 12                 |           | MHz                                  |
| $t_s$                       | Settling time                           | $A_V = -1$ , 10V step, $C_L = 100pF$<br>0.1% error range                       | 1.2                |           | $\mu s$                              |
| $e_{INV}$                   | Equivalent Input Voltage Noise          | $f_{BW} = 20Hz$ to 20kHz   | 0.25               | 0.35      | $\mu V_{RMS}$ (max)                  |
| $e_N$                       | Equivalent Input Voltage Density        | $f = 1kHz$<br>$V_S = \pm 15V$<br>$V_S = \pm 18V$                               | 1.9<br>1.9         | 2.5       | $nV\sqrt{Hz}$<br>$nV\sqrt{Hz}$ (max) |
|                             |   | $f = 10Hz$<br>$V_S = \pm 15V$<br>$V_S = \pm 18V$                               | 2.8<br>3.2         |           | $nV\sqrt{Hz}$<br>$nV\sqrt{Hz}$       |
| $I_n$                       | Current Noise Density                   | $f = 1kHz$   | 2.6                |           | $pA\sqrt{Hz}$                        |
|                             |   | $f = 10Hz$   | 6                  |           | $pA\sqrt{Hz}$                        |
| $V_{OS}$                    | Offset Voltage                          | $V_{CM} = 0V$  | $\pm 0.02$         | $\pm 0.7$ | mV (max)                             |
| PSRR                        | Power Supply Rejection Ratio            | $\Delta V_S = 20V$ (Note 8)  | 120                | 110       | dB (min)                             |
| ISO <sub>CH-CH</sub>        | Channel-to-Channel Isolation            | $f_{IN} = 1kHz$  | 136                |           | dB                                   |
|                             |   | $f_{IN} = 20kHz$   | 135                |           | dB                                   |
| $I_B$                       | Input Bias Current                      | $V_{CM} = 0V$<br>$V_S = \pm 15V$<br>$V_S = \pm 18V$                            | 50<br>53           | 200       | nA<br>nA (max)                       |
|                             |   |  |                    |           |                                      |
| $\Delta I_{OS}/\Delta Temp$ | Input Bias Current Drift vs Temperature | -40°C $\leq$ $T_A$ $\leq$ 85°C   | 0.1                |           | nA/°C                                |
| $I_{OS}$                    | Input Offset Current                    | $V_{CM} = 0V$<br>$V_S = \pm 15V$<br>$V_S = \pm 18V$                            | 25<br>32           | 100       | nA<br>nA (max)                       |
|                             |   |  |                    |           |                                      |

| Symbol       | Parameter                            | Conditions  | LME49722                                |                                      | Units<br>(Limits)                            |
|--------------|--------------------------------------|---|---|--------------------------------------|--|
|              |                                      |   | Typical                                 | Limit                                |  |
|              |                                      |   | (Note 6)                                | (Note 7)                             |  |
| $V_{IN-CM}$  | Common-Mode Input Voltage Range      | $V_S = \pm 15V$   | +14.0<br>-13.9                          | $(V_{CC}) - 2.0$<br>$(V_{EE}) + 2.0$ | V (min)<br>V (min)                           |
|              |                                      | $V_S = \pm 18V$   | +17.0<br>-16.9                          | $(V_{CC}) - 2.0$<br>$(V_{EE}) + 2.0$ | V (min)<br>V (min)                           |
| CMRR         | Common-Mode Rejection                | $-10V \leq V_{CM} \leq 10V$   | 128                                     | 110                                  | dB (min)                                     |
| $Z_{IN}$     | Differential Input Impedance         |   | 30                                      |                                      | k $\Omega$                                   |
| $Z_{CM}$     | Common Mode Input Impedance          | $-10V \leq V_{CM} \leq 10V$   | 1000                                    |                                      | M $\Omega$                                   |
| $A_{VOL}$    | Open Loop Voltage Gain               | $-12V \leq V_{OUT} \leq 12V, R_L = 600\Omega$                                 | 135                                     | 120                                  | dB   |
|              |                                      | $-12V \leq V_{OUT} \leq 12V, R_L = 2k\Omega$                                  | 140                                     |                                      | dB   |
|              |                                      | $-12V \leq V_{OUT} \leq 12V, R_L = 10k\Omega$                                 | 140                                     |                                      | dB   |
| $V_{OM}$     | Output Voltage Swing                 | $V_S = \pm 15V$<br>$R_L = 600\Omega$<br>$R_L = 2k\Omega$<br>$R_L = 10k\Omega$ | +13.7/-14<br>$\pm 14.0$<br>$\pm 14.1$   |                                      | $V_{PEAK}$<br>$V_{PEAK}$<br>$V_{PEAK}$       |
|              |                                      | $V_S = \pm 18V$<br>$R_L = 600\Omega$<br>$R_L = 2k\Omega$<br>$R_L = 10k\Omega$ | +16.6/-16.8<br>$\pm 17.0$<br>$\pm 17.1$ | $\pm 15.5$                           | $V_{PEAK} (min)$<br>$V_{PEAK}$<br>$V_{PEAK}$ |
| $I_{OUT}$    | Output Current                       | $R_L = 600\Omega$<br>$V_S = \pm 15V$<br>$V_S = \pm 18V$                       | $\pm 23$<br>$\pm 27.6/-28$              | $\pm 23$                             | mA<br>mA (min)                               |
| $I_{OUT-CC}$ | Short Circuit Current                | Sink to Source  | +43<br>-40                              |                                      | mA<br>mA                                     |
| $Z_{OUT}$    | Output Impedance                     | $f_{IN} = 10kHz$  |   |                                      |  |
|              |                                      | Closed-Loop<br>Open-Loop  | 0.01<br>13                              |                                      | $\Omega$<br>$\Omega$                         |
| $I_S$        | Total Quiescent Power Supply Current | $I_{OUT} = 0mA$<br>$V_S = \pm 15V$<br>$V_S = \pm 18V$                         | 12.1<br>12.3                            | 16                                   | mA<br>mA (max)                               |

**Note 1:** "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the *Absolute Maximum Ratings* or other conditions beyond those indicated in the *Recommended Operating Conditions* is not implied. The *Recommended Operating Conditions* indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified.

**Note 2:** The *Electrical Characteristics* tables list guaranteed specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not guaranteed.

**Note 3:** The maximum power dissipation must be derated at elevated temperatures and is dictated by  $T_{JMAX}$ ,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation is  $P_{DMAX} = (T_{JMAX} - T_A) / \theta_{JA}$  or the number given in *Absolute Maximum Ratings*, whichever is lower. For the LME49722,  $T_{JMAX} = 150^\circ C$  and the typical  $\theta_{JC}$  is  $27^\circ C/W$ .

**Note 4:** Human body model, applicable std. JESD22-A114C.


**Note 5:** Machine model, applicable std. JESD22-A115-A.

**Note 6:** Typical values represent most likely parametric norms at  $T_A = +25^\circ C$ , and at the *Recommended Operation Conditions* at the time of product characterization and are not guaranteed.


**Note 7:** Datasheet min/max specification limits are guaranteed by test or statistical analysis.

**Note 8:** PSRR is measured as follow:  $V_{OS}$  is measured at two supply voltages,  $\pm 5V$  and  $\pm 15V$ .  $PSRR = |20 \log(\Delta V_{OS} / \Delta V_S)|$ .


# Typical Performance Characteristics

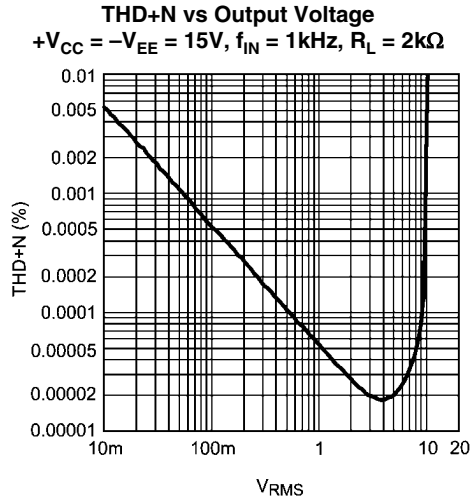


300579p5

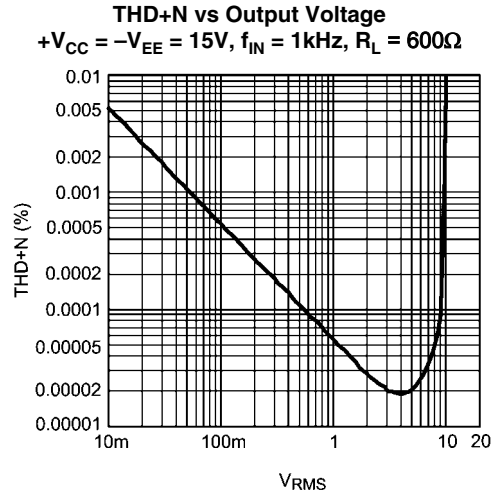


300579p6

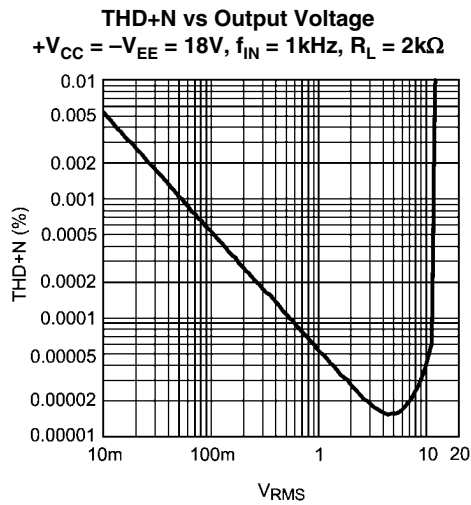


300579p7

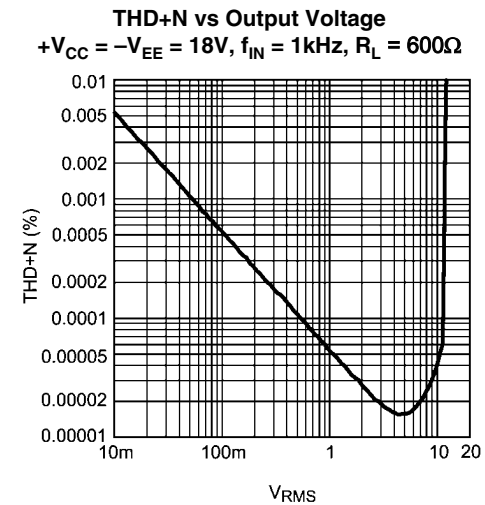


300579p8

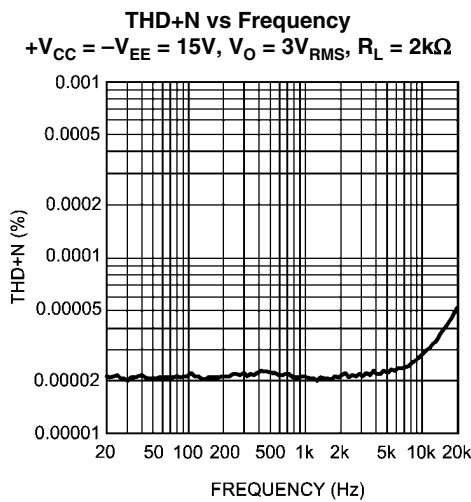


300579p1

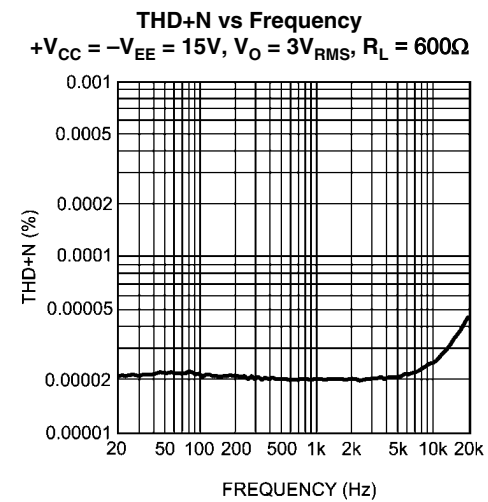


300579p2

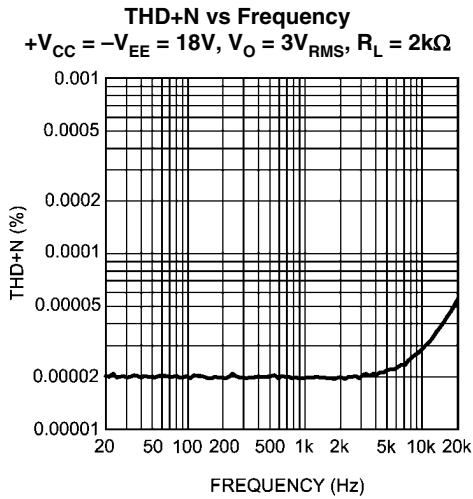


300579p3

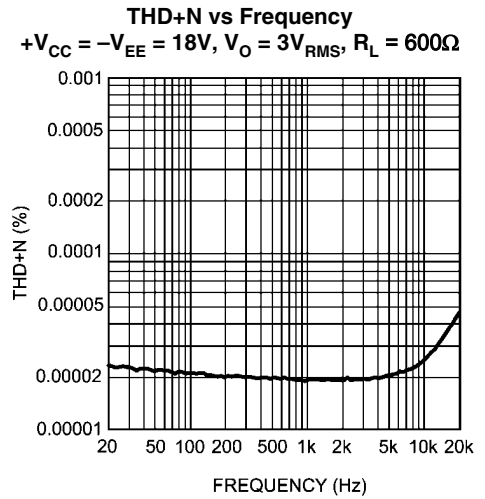


300579p4

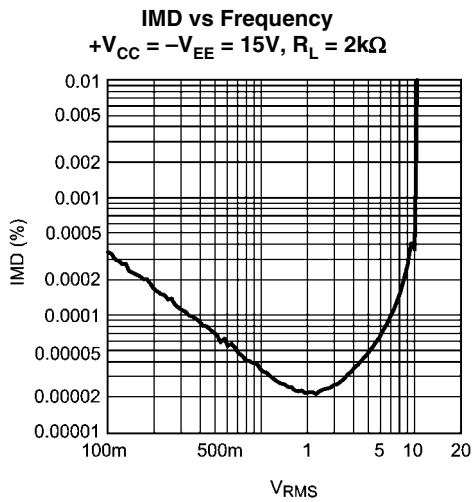


30057922

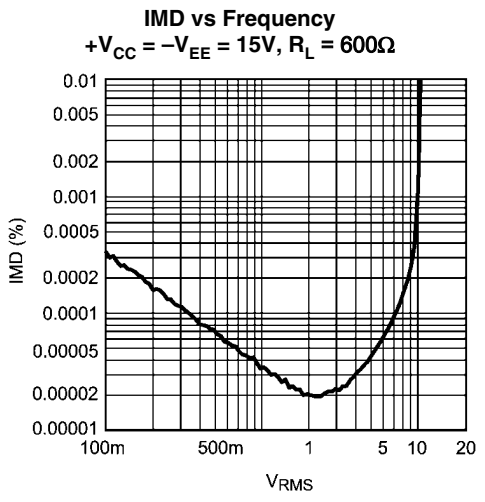


30057923

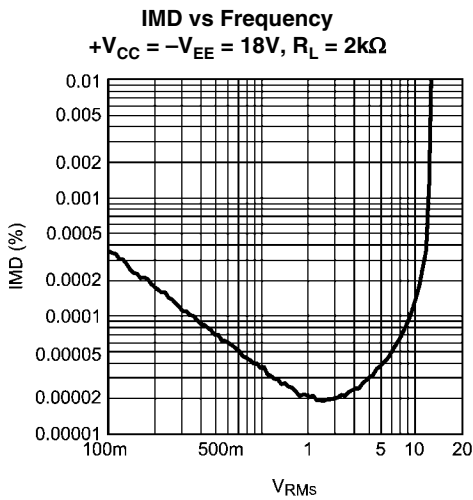


30057924

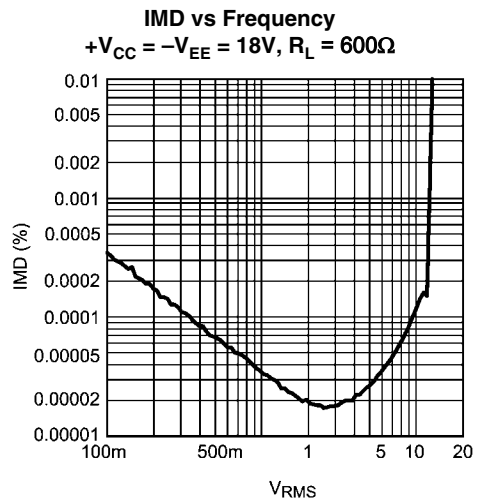


30057925

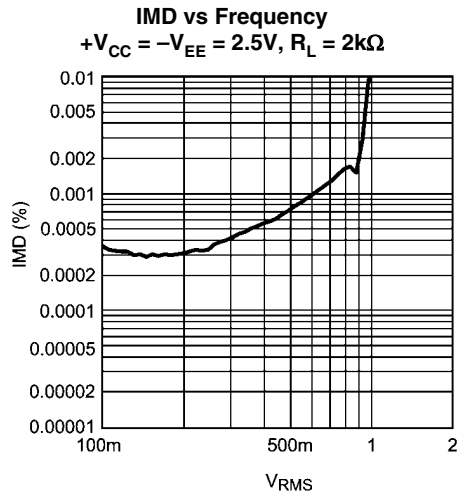


30057920

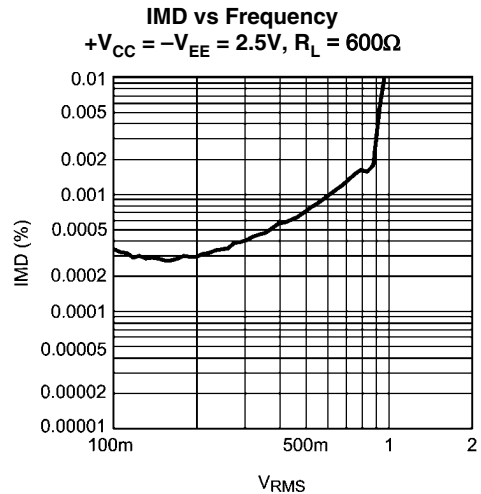


30057921

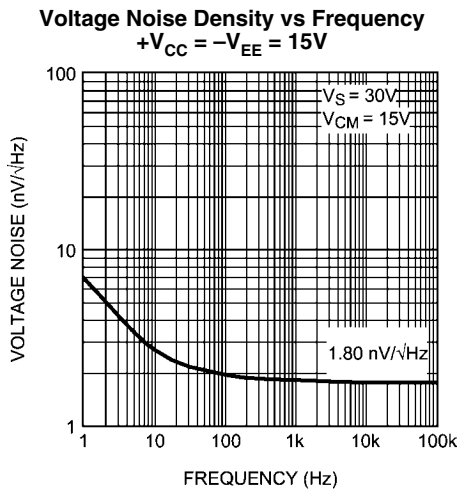


300579p9

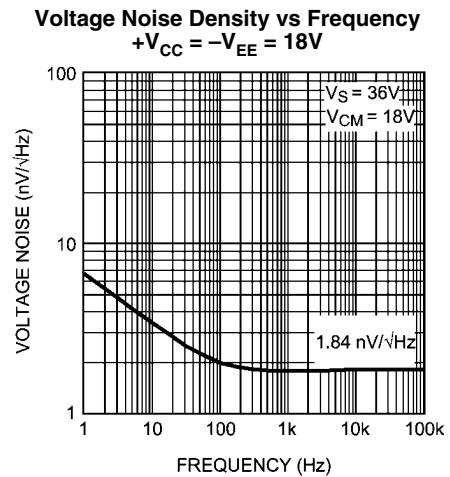

300579q0

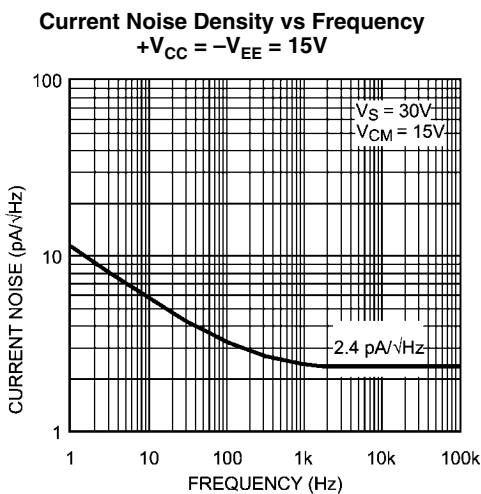


30057917

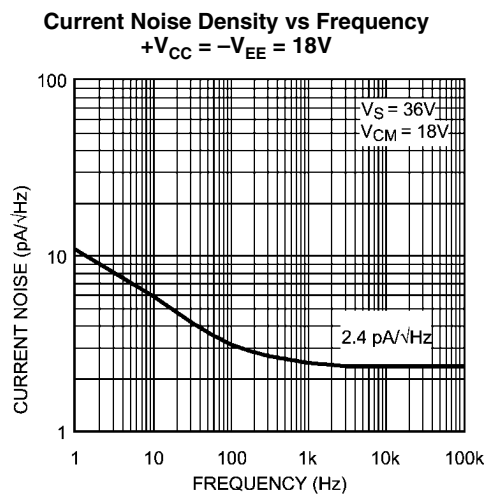

30057918




**PSRR+ vs Frequency**  
 $+V_{CC} = -V_{EE} = 15V, V_{RIPPLE} = 200mV_{PP}, R_L = 2k\Omega$

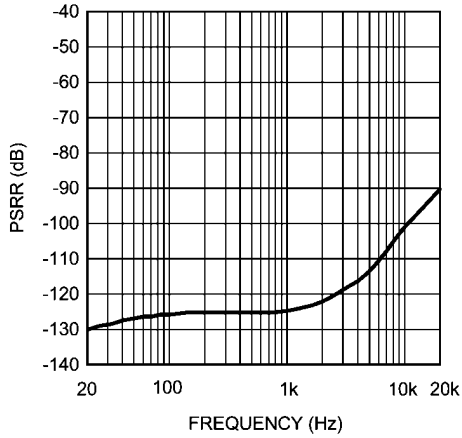


30057915

**PSRR- vs Frequency**  
 $+V_{CC} = -V_{EE} = 15V, V_{RIPPLE} = 200mV_{PP}, R_L = 2k\Omega$

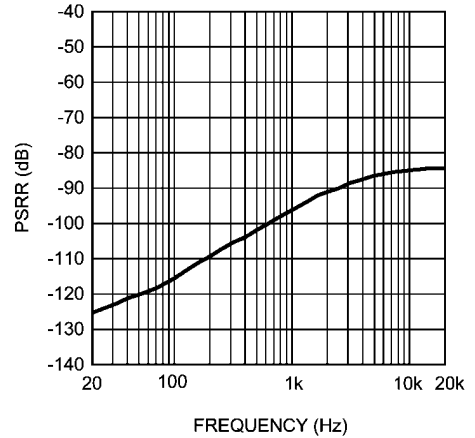


30057926

**Crosstalk vs Frequency**  
 $+V_{CC} = -V_{EE} = 15V, R_L = 2k\Omega, V_{OUT} = 3V_{RMS}$

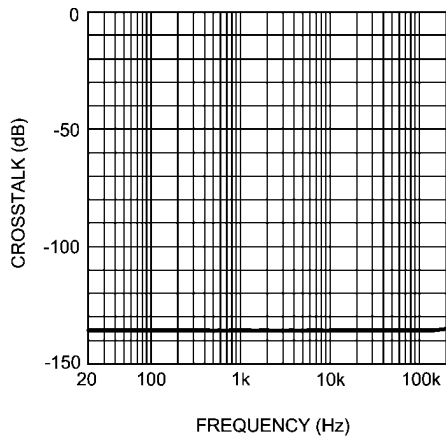


300579p0

**CMRR vs Frequency**  
 $+V_{CC} = -V_{EE} = 15V, R_L = 2k\Omega$

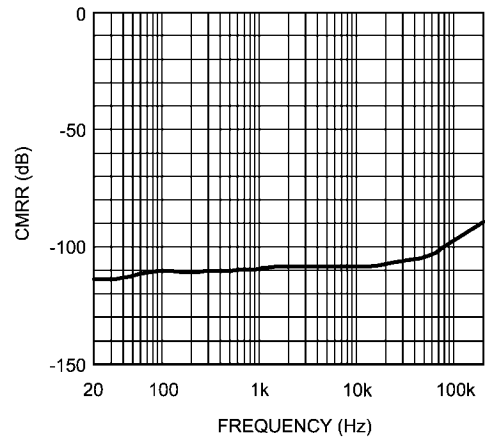


30057916

**Output Voltage vs Supply Voltage**  
 $THD+N = 1\%, R_L = 2k\Omega$

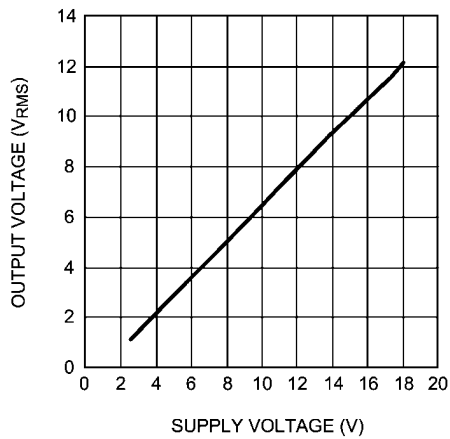


300579q1

**Output Voltage vs Supply Voltage**  
 $THD+N = 1\%, R_L = 600\Omega$

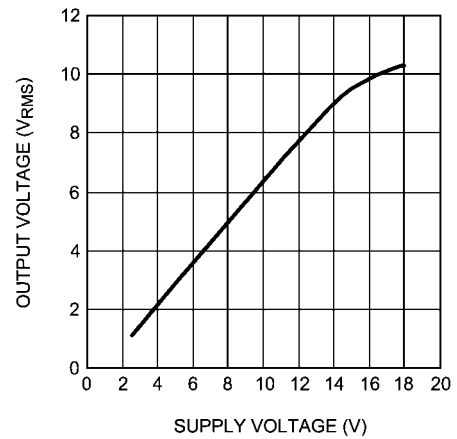


300579q2

**Supply Current vs Supply Voltage**  
 $R_L = 2k\Omega$

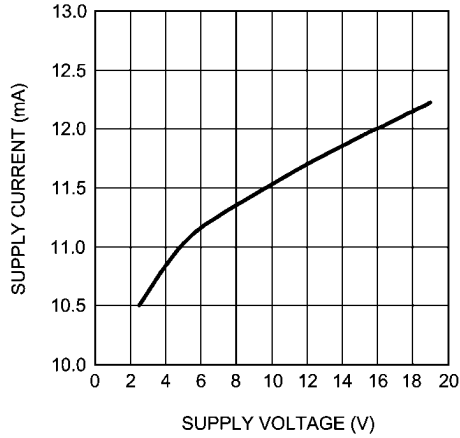


30057911

**Full Power Bandwidth vs Frequency**  
 $+V_{CC} = -V_{EE} = 15V, R_L = 2k\Omega$

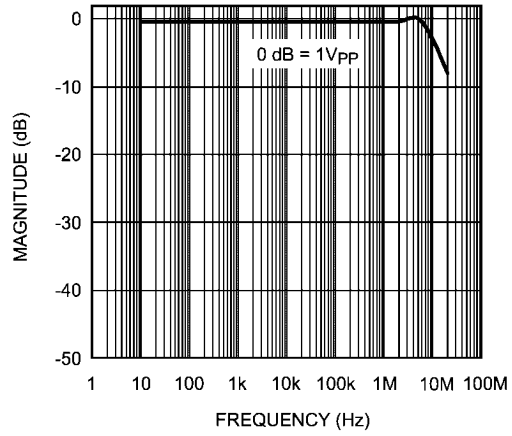

30057919

**Gain Phase vs Frequency**  
 $+V_{CC} = -V_{EE} = 15V$

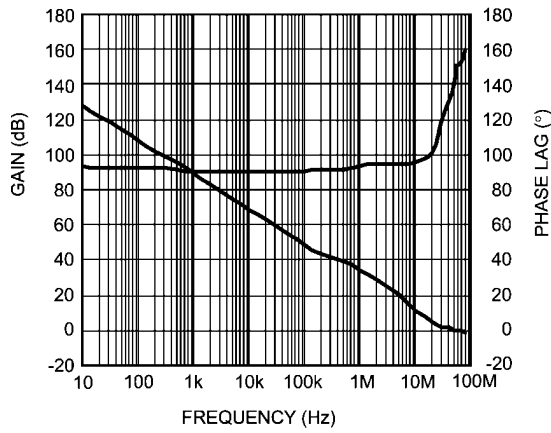


30057914

# Application Information

## APPLICATION HINTS

The LME49722 is a high speed operational amplifier which can operate stably in most of the applications. For the application with gain greater than 2, capacitive loads up to 100pF will cause little change in the phase characteristics of the am-


plifiers and are therefore allowable. Capacitive loads greater than 10pF must be isolated from the output, if the gain value is less than 2. The most straightforward way to do this is to put a resistor (its value  $\geq 20\Omega$ ) in series with the output. The resistor will also prevent unnecessary power dissipation if the output is accidentally shorted.

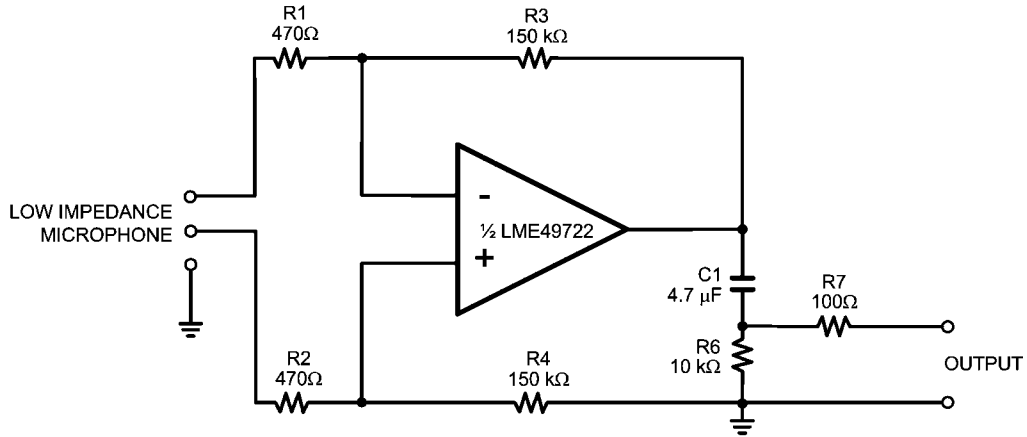

- Total voltage noise density:  $e_{N\_total}^2 \approx e_N^2 + e_{N\_R1}^2 + e_{N\_R2}^2 = 1.9^2 + 2(2.7^2)$ ,  
then  $e_{N\_total} = 4.3$  nV/√Hz. For  $e_{N\_R1} = e_{N\_R2} \approx 2.7$  nV/√Hz, if  $R1 = R2 \approx 470\Omega$ .
- Or total voltage noise = 0.13 μV input referred in a 1 kHz noise bandwidth.

30057913

FIGURE 2. Low Impedance Microphone Pre-amplifier

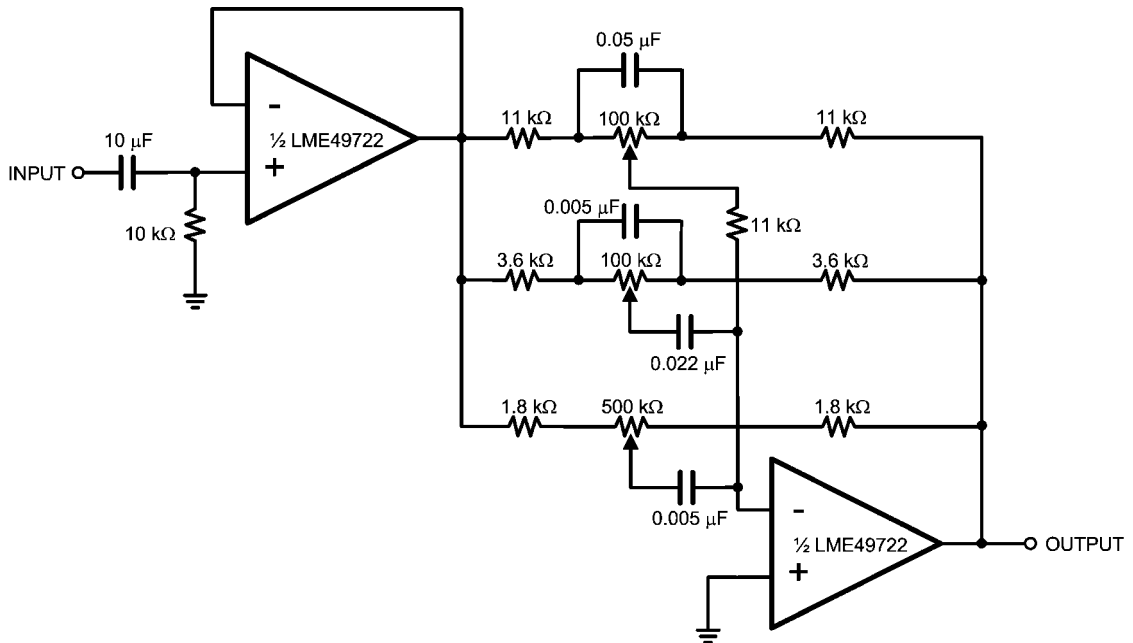




30057912

FIGURE 3. Three-Band Active Tone Control

## Revision History

| Rev | Date     | Description      |
|-----|----------|------------------|
| 1.0 | 03/27/08 | Initial release. |

**Physical Dimensions** inches (millimeters) unless otherwise noted

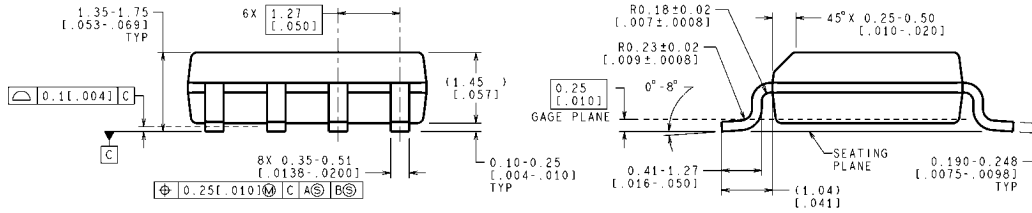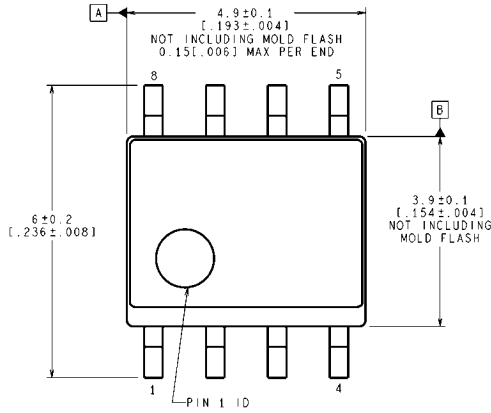

CONTROLLING DIMENSION IS MILLIMETER  
 VALUES IN [ ] ARE INCHES  
 DIMENSIONS IN ( ) FOR REFERENCE ONLY

M08A (Rev L)

**Narrow SOIC Package**  
**Order Number LME49722MA**  
**NS Package Number M08A**

# Notes

## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

| Products                       |  | Design Support          |  |
|--------------------------------|--|-------------------------|--|
| Amplifiers                     | <a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>   | WEBENCH                 | <a href="http://www.national.com/webench">www.national.com/webench</a>             |
| Audio                          | <a href="http://www.national.com/audio">www.national.com/audio</a>             | Analog University       | <a href="http://www.national.com/AU">www.national.com/AU</a>                       |
| Clock Conditioners             | <a href="http://www.national.com/timing">www.national.com/timing</a>           | App Notes               | <a href="http://www.national.com/appnotes">www.national.com/appnotes</a>           |
| Data Converters                | <a href="http://www.national.com/adc">www.national.com/adc</a>                 | Distributors            | <a href="http://www.national.com/contacts">www.national.com/contacts</a>           |
| Displays                       | <a href="http://www.national.com/displays">www.national.com/displays</a>       | Green Compliance        | <a href="http://www.national.com/quality/green">www.national.com/quality/green</a> |
| Ethernet                       | <a href="http://www.national.com/ethernet">www.national.com/ethernet</a>       | Packaging               | <a href="http://www.national.com/packaging">www.national.com/packaging</a>         |
| Interface                      | <a href="http://www.national.com/interface">www.national.com/interface</a>     | Quality and Reliability | <a href="http://www.national.com/quality">www.national.com/quality</a>             |
| LVDS                           | <a href="http://www.national.com/lvds">www.national.com/lvds</a>               | Reference Designs       | <a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>       |
| Power Management               | <a href="http://www.national.com/power">www.national.com/power</a>             | Feedback                | <a href="http://www.national.com/feedback">www.national.com/feedback</a>           |
| Switching Regulators           | <a href="http://www.national.com/switchers">www.national.com/switchers</a>     |                         |  |
| LDOs                           | <a href="http://www.national.com/ldo">www.national.com/ldo</a>                 |                         |  |
| LED Lighting                   | <a href="http://www.national.com/led">www.national.com/led</a>                 |                         |  |
| PowerWise                      | <a href="http://www.national.com/powerwise">www.national.com/powerwise</a>     |                         |  |
| Serial Digital Interface (SDI) | <a href="http://www.national.com/sdi">www.national.com/sdi</a>                 |                         |  |
| Temperature Sensors            | <a href="http://www.national.com/tempsensors">www.national.com/tempsensors</a> |                         |  |
| Wireless (PLL/VCO)             | <a href="http://www.national.com/wireless">www.national.com/wireless</a>       |                         |  |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2008 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor  
Americas Technical  
Support Center**  
Email:  
[new.feedback@nsc.com](mailto:new.feedback@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor Europe  
Technical Support Center**  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
German Tel: +49 (0) 180 5010 771  
English Tel: +44 (0) 870 850 4288

**National Semiconductor Asia  
Pacific Technical Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan  
Technical Support Center**  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                        |  |
|------------------------|--|
| Audio                  | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers             | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters        | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products          | <a href="http://www.dlp.com">www.dlp.com</a>   |
| DSP                    | <a href="http://dsp.ti.com">dsp.ti.com</a>   |
| Clocks and Timers      | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface              | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                  | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt             | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers       | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                   | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Mobile Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity  | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |  |
|-------------------------------|--|
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Transportation and Automotive | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated

[www.BDTIC.com/TI](http://www.BDTIC.com/TI)