



MICROWAVE CORPORATION v00.0511



HMC985LP4KE

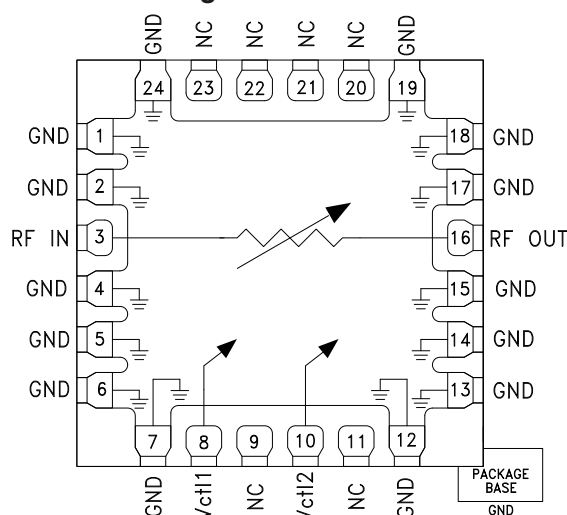
GaAs MMIC VOLTAGE - VARIABLE ATTENUATOR, 10 - 40 GHz

Typical Applications

The HMC985LP4KE is ideal for:

- Point-to-Point Radio
- VSAT Radio
- Test Instrumentation
- Microwave Sensors
- Military, ECM & Radar

Functional Diagram



Features

- Wide Bandwidth: 10 - 40 GHz
- Excellent Linearity: +32 dB Input IP3
- Wide Attenuation Range: 35 dB
- No External Matching
- 24 Lead 4x4 mm SMT Package: 16 mm²

General Description

The HMC985LP4KE is an absorptive Voltage Variable Attenuator (VVA) which operates from 10 - 40 GHz and is ideal in designs where an analog DC control signal must be used to control RF signal levels over a 35 dB dynamic range. It features two shunt-type attenuators which are controlled by two analog voltages, Vctl1 and Vctl2. Optimum linearity performance of the attenuator is achieved by first varying Vctl1 of the first attenuation stage from -3V to 0V with Vctl2 fixed at -3V. The control voltage of the second attenuation stage, Vctl2, should then be varied from -3V to 0V with Vctl1 fixed at 0V.

if the Vctl1 and Vctl2 pins are connected together it is possible to achieve the full analog attenuation range with only a small degradation in input IP3 performance. Applications include AGC circuits and temperature compensation of multiple gain stages in microwave point-to-point and VSAT radios.

Electrical Specifications, $T_A = +25^\circ\text{C}$, Test Condition $V_{ctl1} = V_{ctl2}$

Parameter	Frequency	Min.	Typ.	Max.	Units
Insertion Loss ^[1]	10 - 20 GHz		3	3.5	dB
	20 - 30 GHz		3	4	dB
	30 - 40 GHz		3.5	4.5	dB
Attenuation Range	10 - 20 GHz	25	30		dB
	20 - 30 GHz	30	35		dB
	30 - 40 GHz	35	40		dB
Input Return Loss	10 - 40 GHz		13		dB
Output Return Loss	10 - 40 GHz		13		dB
Input Third Order Intercept (two-tone input Power = 10 dBm Each Tone) ^[2]			33		dBm

[1] Vctl1 = Vctl2 = -2.4V

[2] Vctl1 = Vctl2 = -2.0V worst case

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

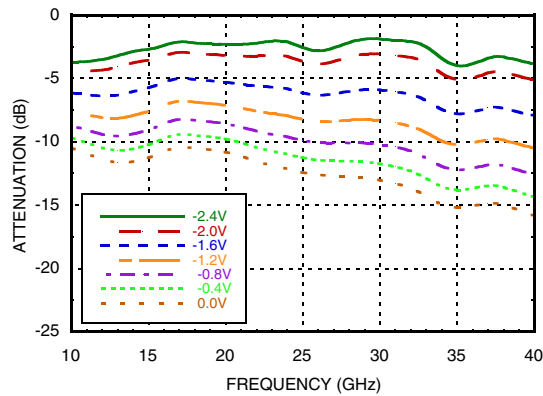
Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support Phone: 978-250-3343 or apps@hittite.com


www.BD11C.com/Hittite/

GaAs MMIC VOLTAGE - VARIABLE ATTENUATOR, 10 - 40 GHz


Attenuation vs. Frequency over Vctrl1 = Variable, Vctrl2 = -3V



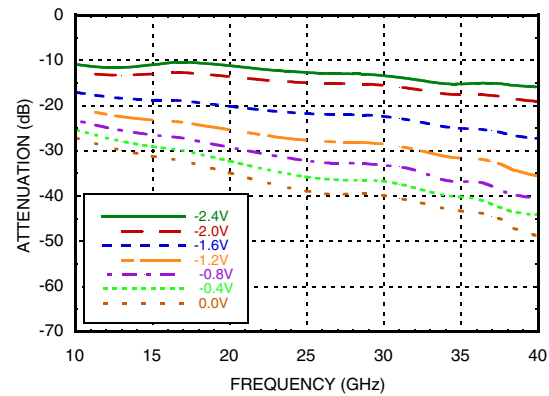
Attenuation vs. Frequency over Vctrl1 = 0V, Vctrl2 = Variable



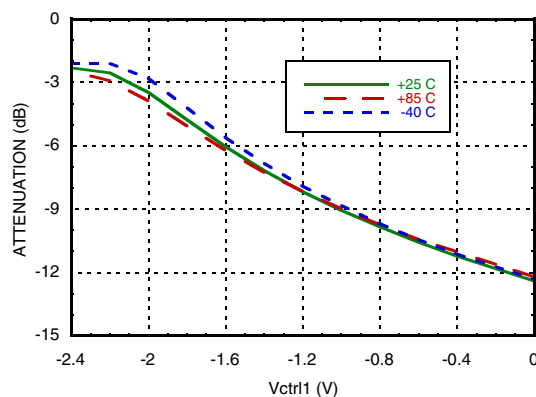
**Attenuation vs. Vctrl1
Over Temperature @ 25 GHz, Vctrl2 = -3V**



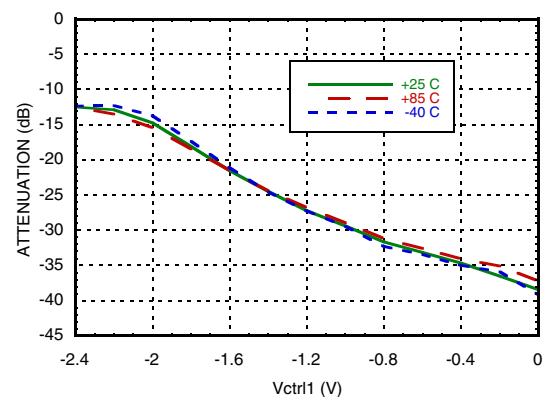
**Attenuation vs. Vctrl2
Over Temperature @ 30 GHz, Vctrl1 = 0V**



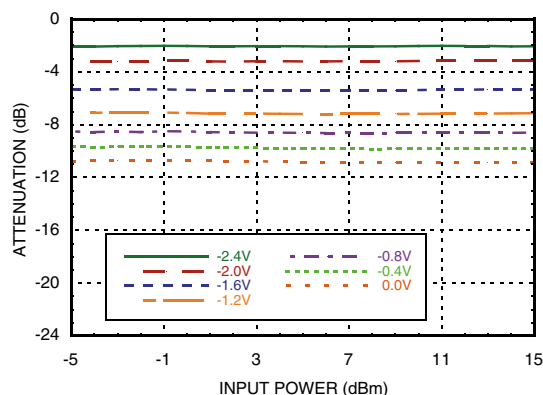**Attenuation vs. Pin @ 20 GHz over Vctrl1
Vctrl1 = Variable, Vctrl2 = -3V**









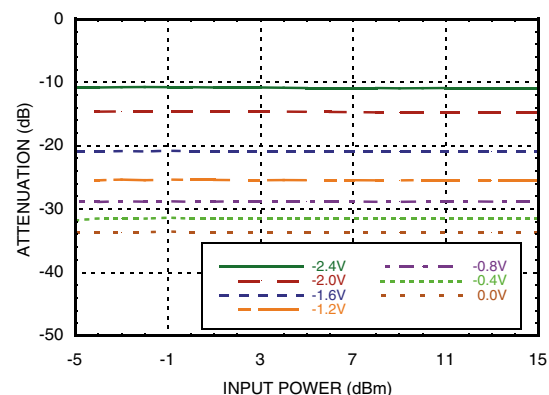**Attenuation vs. Pin @ 20 GHz over Vctrl2
Vctrl2 = Variable, Vctrl1 = 0V**









MICROWAVE CORPORATION v00.0511

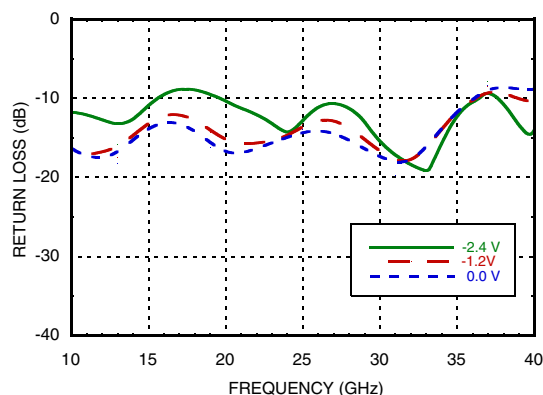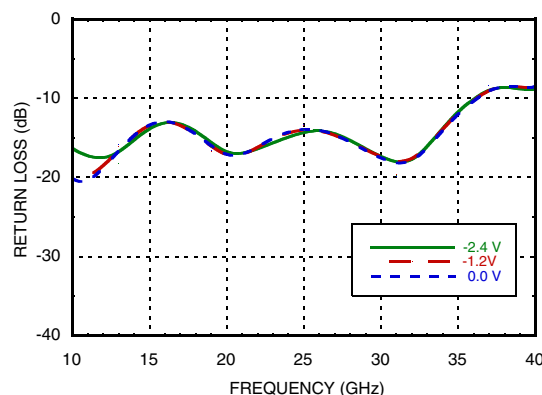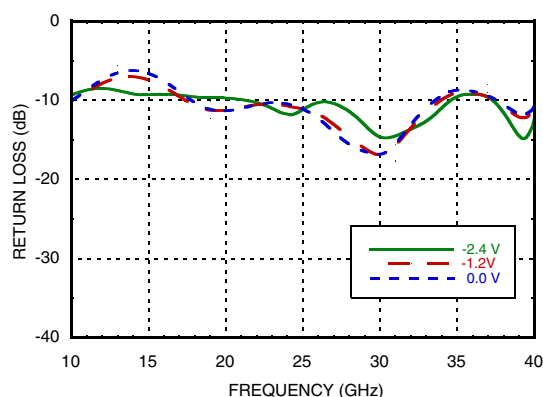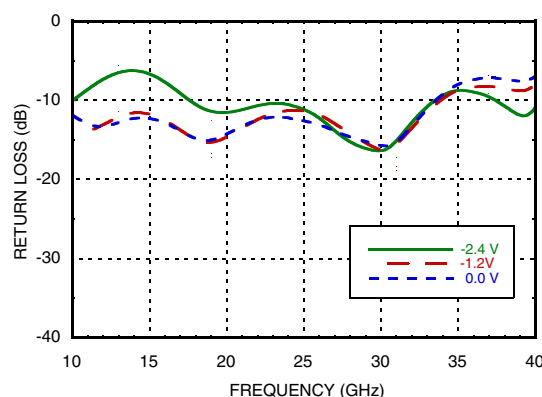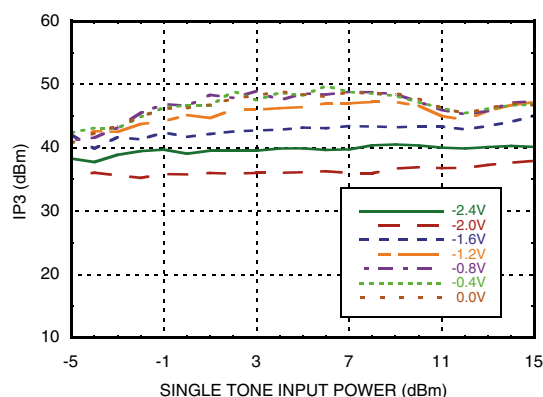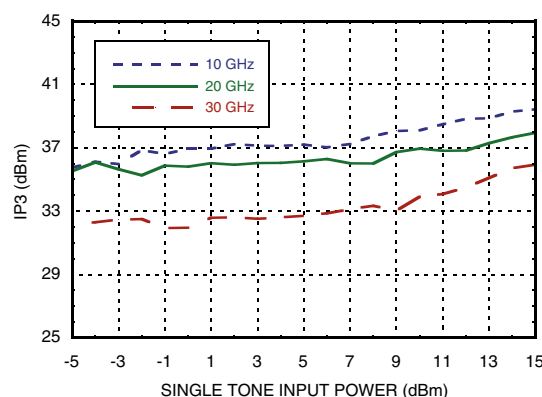**HMC985LP4KE****GaAs MMIC VOLTAGE - VARIABLE
ATTENUATOR, 10 - 40 GHz****Input Return Loss****Vctl1 = Variable, Vctl2 = -3V****Input Return Loss****Vctl1 = 0V, Vctl2 = Variable****Output Return Loss****Vctl1 = Variable, Vctl2 = -3V****Output Return Loss****Vctl1 = 0V, Vctl2 = Variable****Input IP3 vs. Input Power @ 20 GHz****Vctl1 = Variable, Vctl2 = -3V****Input IP3 vs. Input Power Over Frequency****Vctl1 = -2V, Vctl2 = -3V [1]**

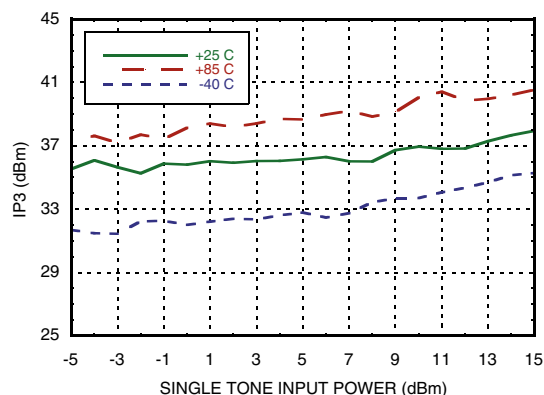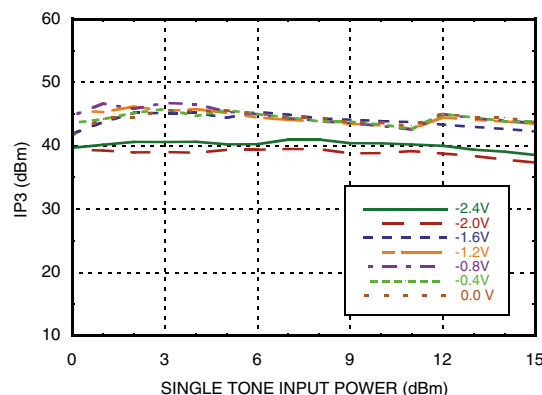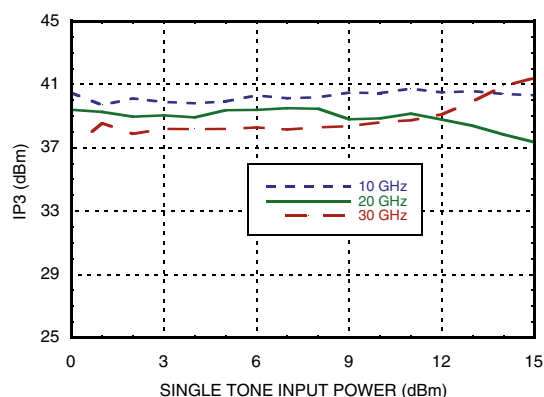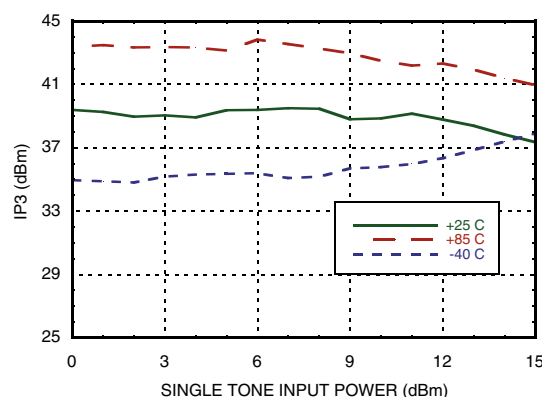
[1] Worst Case IP3

**GaAs MMIC VOLTAGE - VARIABLE
 ATTENUATOR, 10 - 40 GHz**
**Input IP3 vs. Input Power Over Temperature
 @ 20 GHz, Vctl1 = -2V, Vctl2 = -3V [1]**

**Input IP3 vs. Input Power @ 20 GHz
 Vctl2 = Variable, Vctl1 = 0V**

**Input IP3 vs. Input Power Over Frequency
 Vctl2 = -2V, Vctl1 = 0V [1]**

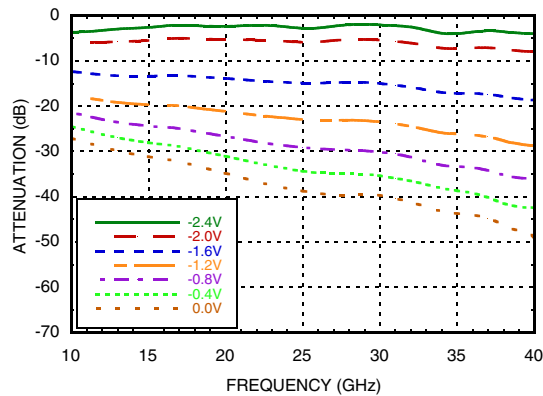**Input IP3 vs Input Power over Temperature
 @ 20 GHz, Vctl2 = -2V, Vctl1 = 0V [1]**


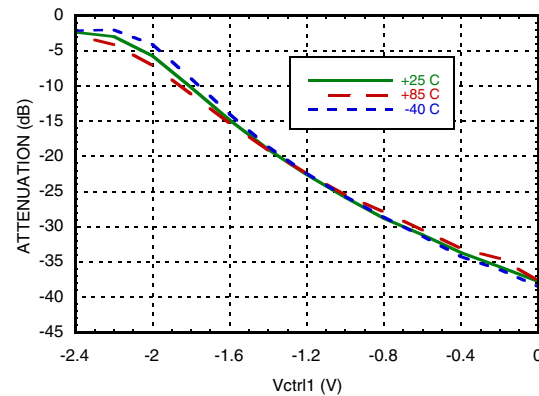
[1] Worst Case IP3

GaAs MMIC VOLTAGE - VARIABLE ATTENUATOR, 10 - 40 GHz

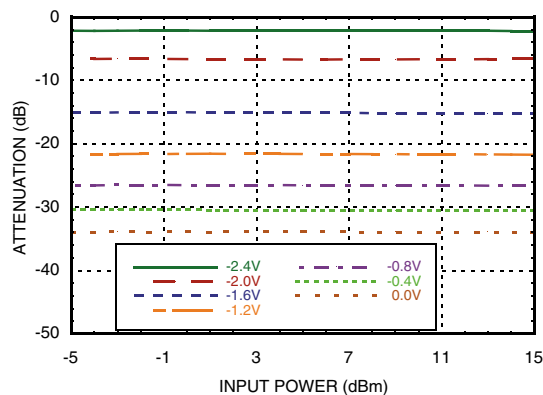
Attenuation vs Frequency Over Vctrl
Vctrl1 = Vctrl2




Attenuation vs. Vctrl Over Temperature
@ 20 GHz, Vctrl1 = Vctrl2




Attenuation vs. Pin @ 20 GHz Over Vctrl
Vctrl1 = Vctrl2




Input Return Loss, Vctrl1 = Vctrl2

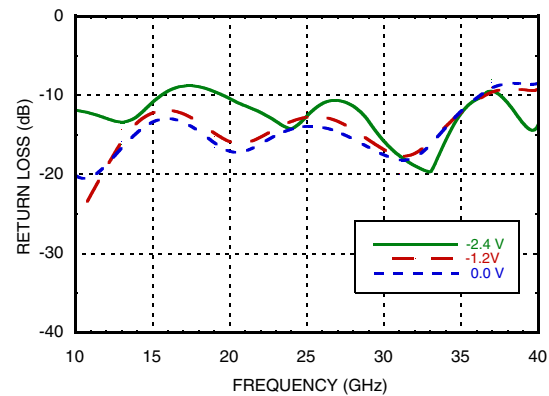

Output Return Loss, Vctrl1 = Vctrl2

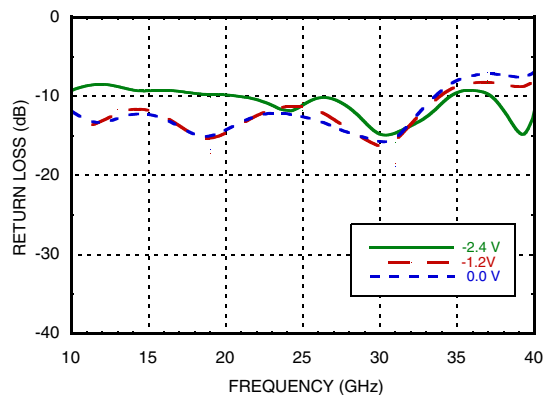

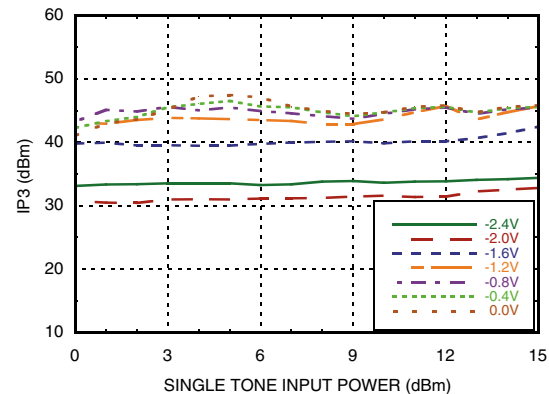
Input IP3 vs. Input Power Over Vctrl @ 20 GHz, Vctrl1 = Vctrl2






GaAs MMIC VOLTAGE - VARIABLE ATTENUATOR, 10 - 40 GHz




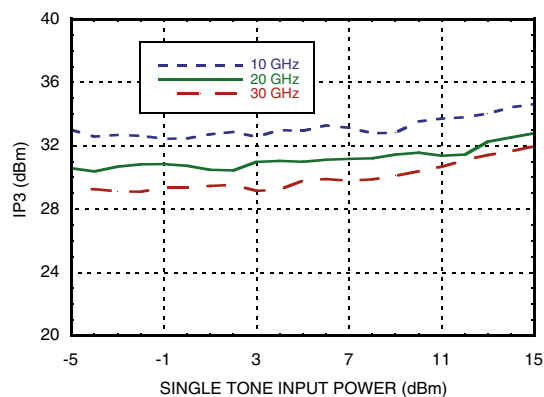
Input IP3 vs. Input Power Over Frequency
 $V_{ctl1} = V_{ctl2}$



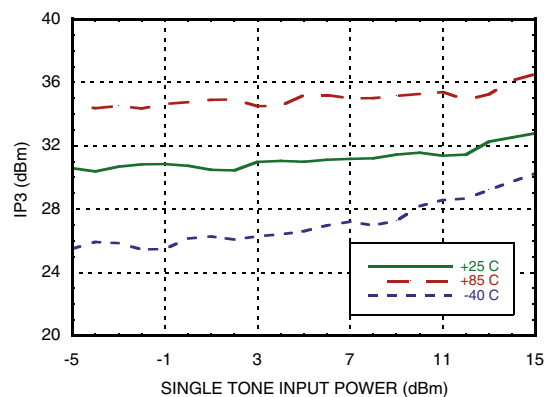
Input IP3 vs. Input Power Over Temperature @ 20 GHz
 $V_{ctl1} = V_{ctl2}$



Pin Descriptions

Pin Number	Function	Description	Pin Schematic
1, 2, 4-7, 12-15, 17-19, 24	GND	These pins and package bottom must be connected to RF/DC ground externally.	
3	RFIN	This pad is DC coupled and matched to 50 Ohms.	
8	Vctl1	Control Voltage 1.	
9, 11, 20-23	NC	These pins are not connected internally, however all data shown herein was measured with these pins connected to RF/DC ground externally.	
10	Vctl2	Control Voltage 2.	
16	RFOUT	This pad is DC coupled and matched to 50 Ohms.	

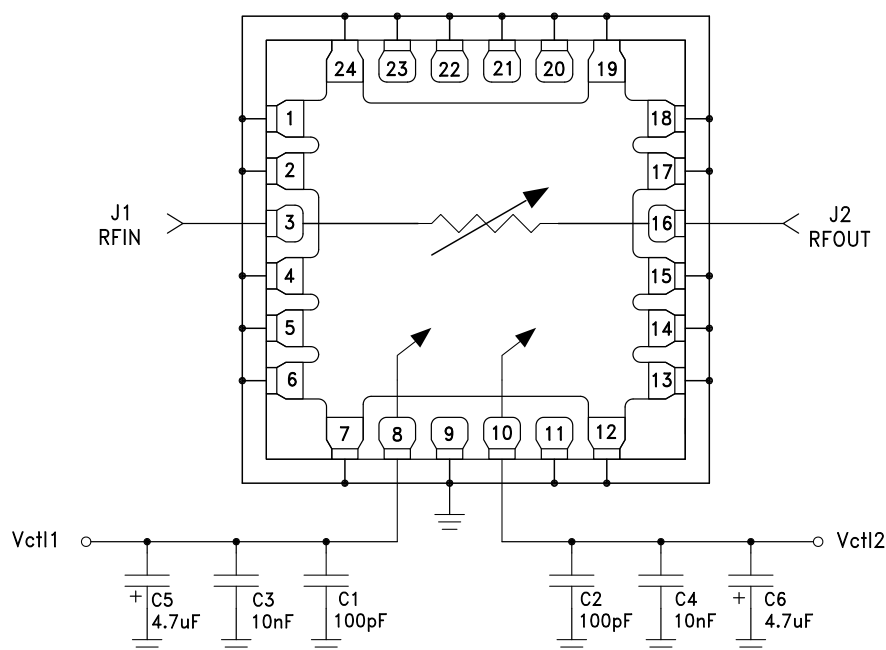Assembly Diagram






MICROWAVE CORPORATION v00.0511

**HMC985LP4KE**

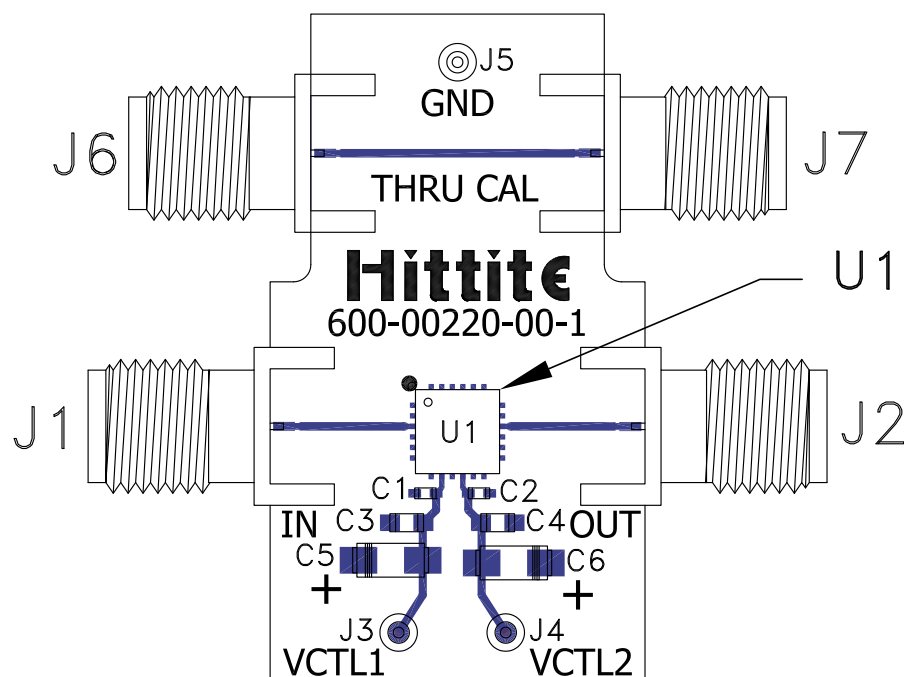**GaAs MMIC VOLTAGE - VARIABLE
ATTENUATOR, 10 - 40 GHz**

Evaluation PCB**List of Materials for Evaluation PCB EVAL01- HMC985LP4KE [1]**

Item	Description
J1-J2, J6-J7	K Connectors.
J3-J5	DC Pins.
C1-C2	100pF Capacitors, 0402 Pkg.
C3-C4	0.01 μ F Capacitor, 0603 Pkg.
C5-C6	4.7 μ F Case A, Tantalum.
U1	HMC985LP4KE VVA.
PCB	600-00220-00 Evaluation PCB.

[1] Reference this number when ordering complete evaluation PCB

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



MICROWAVE CORPORATION v00.0511



HMC985LP4KE

**GaAs MMIC VOLTAGE - VARIABLE
ATTENUATOR, 10 - 40 GHz**

Notes:

ATTENUATORS - ANALOG - SMT

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support Phone: 978-250-3343 or apps@hittite.com

www.BDTIC.com/Hittite/