

Double-Balanced Mixer

Rev. V3

Features

- LO 10 to 1500 MHz
- RF 10 to 1500 MHz
- IF DC to 800 MHz
- LO Drive +7 dBm (nominal)
- High Isolation 35 dB (typ)


Description

The M2A is a double balanced mixer, designed for use in military, commercial, and test equipment applications. The design utilizes Schottky ring quad diodes and broadband ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. Environmental screening is available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Ordering Information

Part Number	Package
M2A	TO-8
M2AC	SMA Connectorized

Product Image



Electrical Specifications: $Z_0 = 50\Omega$ Lo = +7 dBm (Downconverter application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
rarameter Test Conditions		Units		+25°C	-54º to +85ºC *
SSB Conversion Loss (max)	fR = 0.02 to 0.6 GHz, fL = 0.01 to 0.8 GHz, fI = 0.001 to 0.2 GHz fR = 0.01 to 1.5 GHz, fL = 0.01 to 1.5 GHz, fI = 0.001 to 0.2 GHz fI = 0.001 to 0.8 GHz	dB	7.0 7.5 8.0	7.5 8.5 9.0	8.0 9.0 9.5
SSB Noise Figure (max)	Within 1 db of conversion loss	dB			
Isolation, L to R (min)	fL = 0.01 to 0.5 GHz fL = 0.5 to 1.2 GHz fL = 1.2 to 1.5 GHz	dB	45 40 35	35 28 25	
Isolation, L to I (min)	fL = 0.01 to 0.5 GHz fL = 0.5 to 1.2 GHz fL = 1.2 to 1.5 GHz	dB	40 30 25	30 20 18	
1 dB Conversion Comp.	fL = +7 dBm	dBm	0		
Input IP3		dBm	+12		

^{*} The M2AC specification limits apply at 0°C to +50°C.

[•] North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology

India Tel: +91.80.4155721
 China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.




Double-Balanced Mixer

Rev. V3


Typical Performance Curves

Conversion Loss




F_R = 1000 MHz F_L = 1020 MHz F₁ = 20 MHz

Conversion Loss




F_{IF} = F_{LO} - F_{RF} = 20 MHz P_{LO} = +7 dB m P_{RF} = -10 dB m

Conversion Loss



 F_{LO} = 1000 MHz AT +7 dB m P_{IF} = -10 dB m


Isolation



 $P_{LO} = +7 dBm$

Conversion Loss

Commitment to produce in volume is not gui



and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology
Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and or rest user may be available.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

• India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M2A / M2AC




Double-Balanced Mixer

Rev. V3


Absolute Maximum Ratings

Parameter	Absolute Maximum		
Operating Temperature	-54°C to +100°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+23 dBm max @ +25°C +17 dBm max @ +100°C		
Peak Input Current	50 mA DC		

Outline Drawing: TO-8 *

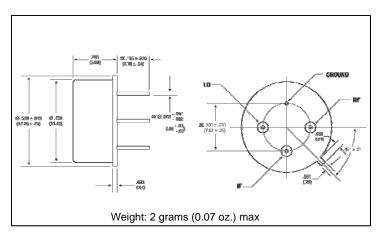

Outline Drawing: SMA Connectorized *

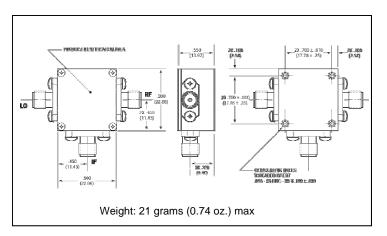

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not g

• India Tel: +91.80.4155721

• China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.