

## **Triple-Balanced Mixer**

Rev. V3

#### **Features**

- LO 2 TO 18 GHz
- RF 2 TO 18 GHz
- IF 0.03 TO 4 GHz
- LO DRIVE: +10 dBm (NOMINAL)
- WIDE BANDWIDTH


### **Description**

M93 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.

# **Ordering Information**

Part Number	Package		
M93	Minpac		
M93C	SMA Connectorized		

### Product Image

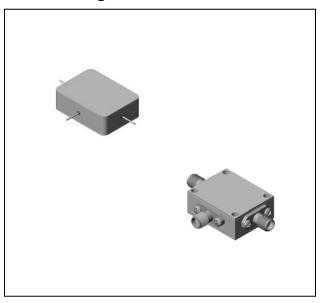

# Electrical Specifications: $Z_0 = 50\Omega$ Lo = +10 dBm (Downconverter Application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
Farameter				+25°C	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 2 to 10 GHz, fL = 2 to 14 GHz, fl = 0.03 to 4 GHz fR = 10 to 18 GHz, fL = 6 to 18 GHz, fl = 0.03 to 4 GHz	dB dB	7.5 8.0	10.0 11.0	10.5 11.5
Isolation, L to R (min)	fL = 2 to 18 GHz	dB	29	15	13
Isolation, L to I (min)	fL = 2 to 18 GHz	dB	34	16	14
1 dB Conversion Comp.	fL = +10 dBm	dBm	+4		
Input IP3	fR1 = 6 GHz at -6 dBm, fR2 = 6.01 GHz at -6 dBm, fL = 8 GHz at +10 dBm fR1 = 15 GHz at -6 dBm, fR2 = 15.01 GHz at -6 dBm, fL =18 GHz at +10 dBm	dBm dBm	+14 +18		

Commitment to produce in volume is not gui

<sup>•</sup> North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

<sup>•</sup> India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.





## **Triple-Balanced Mixer**


Rev. V3


### **Typical Performance Curves**

#### Conversion Loss vs. Frequency, LO Power @ +10 dBm

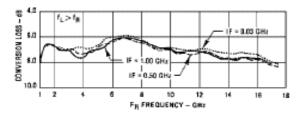


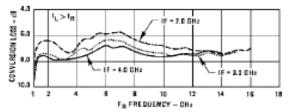

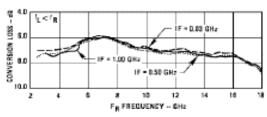


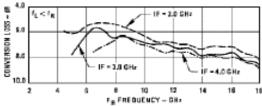



#### Isolation vs. Frequency, LO Power @ +10 dBm

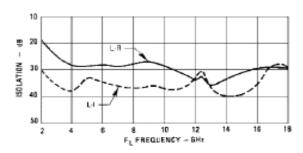



### R-Port VSWR vs. Frequency, LO Power @ +10 dBm

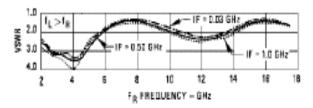


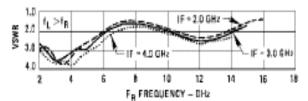

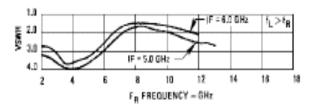

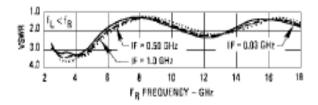

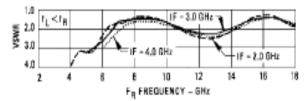

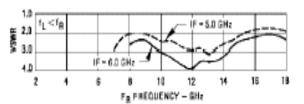

Solutions has under development. Performance is based on engineering tests. Specifications are

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not gual

• India Tel: +91.80.4155721

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.




# **Triple-Balanced Mixer**


Rev. V3


### **Absolute Maximum Ratings**

Parameter	Absolute Maximum		
Operating Temperature	-54°C to +100°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+26 dBm max @ +25°C +23 dBm max @ +100°C		
Peak Input Current	mA DC		

### I-Port VSWR vs. Frequency, LO Power @ +10 dBm

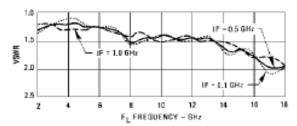


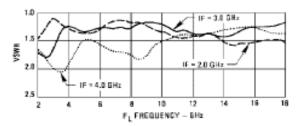

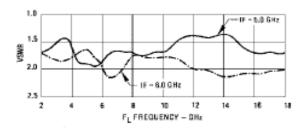


#### L-Port VSWR vs. Frequency


Commitment to produce in volume is not du

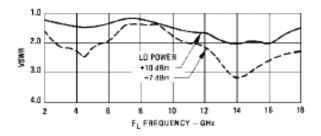

## Outline Drawing: Minpac \*

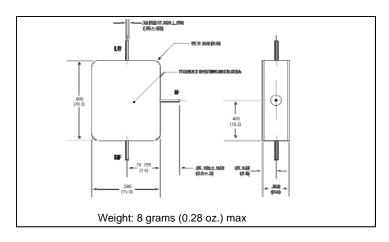

## Outline Drawing: SMA Connectorized \*

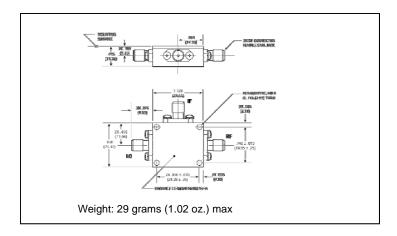

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology
Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and one of the containing test of a sailable.

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
   China Tel: +86.21.2407.1588
   Visit www.macomtech.com for additional data sheets and product information.