# MAAM-010144



# Push Pull CATV Amplifier 50 - 1000 MHz

Rev. V1

#### **Features**

- 20.5 dB Gain
- +8 V DC Bias
- · Differential Inputs and Outputs
- Low Distortion
- Lead-Free TSSOP-16LD exposed paddle
- Halogen-Free "Green" Mold Compound
- RoHS\* Compliant and 260°C Reflow Compatible

#### **Description**

The MAAM-010144 is a GaAs MESFET MMIC amplifier in a lead-free TSSOP-16LD exposed paddle package. The MMIC design is configured as a pair of cascode MESFET amplifiers for broadband performance. It is designed for integration in a 75  $\Omega$  push-pull, low distortion, amplifier circuit.


The device is ideally suited for use in CATV, FTTX, DBS, and HDTV applications where low noise figure and low distortion are required.

## Ordering Information 1,2

Part Number	Package		
MAAM-010144-000000	Bulk Packaging		
MAAM-010144-TR1000	1000 Piece Reel		
MAAM-010144-TR3000	3000 Piece Reel		
MAAM-010144-001SMB	Sample Test Board		

- 1. Reference Application Note M513 for reel size information.
- 2. All sample boards include 5 loose parts.

#### **Functional Schematic**



## Pin Configuration<sup>3</sup>

Pin No.	Pin Name	Description	
1	OUT1+	Output 1+	
2	FB1+	Feedback 1+	
3	IN1+	Input 1+	
4	N/C	No Connection	
5	N/C	No Connection	
6	IN1-	Input 1-	
7	FB1-	Feedback 1-	
8	OUT1-	Output 1-	
9	BIAS-	DC Bias	
10	IN2-	Input 2-	
11	FB2-	Feedback 2-	
12	OUT2-	Output 2-	
13	OUT2+	Output 2+	
14	FB2+	Feedback 2+	
15	IN2+	Input 2+	
16	BIAS+ DC Bias		
Paddle⁴	RF and DC Ground		

- It is recommended, but not absolutely compulsory, that all No Connections (N/C) within the IC are connected to ground on the printed circuit board.
- The exposed pad centered on the package bottom must be connected to RF and DC ground.

North America Tel: 800.366.2266
 Europe Tel: +353.21.244.6400
 India Tel: +91.80.43537383
 China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

<sup>\*</sup> Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## MAAM-010144



Push Pull CATV Amplifier 50 - 1000 MHz

Rev. V1

# Electrical Specifications: $T_A$ = 25°C, Freq: 50 - 1000 MHz, $V_{DD}$ = +8 Volts, $Z_0$ = 75 $\Omega$ , Test Circuit with M/A-COM Technology Balun MABA-009210-CT1760

Parameter	Test Conditions	Units	Min.	Тур.	Max.
Gain	_	dB	19	20.5	23
Gain Flatness	_	dB	_	0.6	_
Noise Figure	_	dB	_	5.5	_
Input Return Loss	_	dB	_	18	_
Output Return Loss	_	dB	_	15	_
Reverse Isolation	_	dB	_	36	_
Output IP2	500 MHz, +8 dBm output	dBm	_	80	_
Output IP3	Two tones at 500 & 506 MHz, +8 dBm output/tone	dBm	41	43	_
Composite Triple Beat, CTB	77 Channels, +39 dBm V / Channel at the output	dBc	_	-70	_
Composite Second Order, CSO	77 Channels, +39 dBm V / Channel at the output	dBc	_	-70	_
Cross modulation	77 Channels, +39 dBm V / Channel at the output	dBc	_	-70	_
P1dB	500 MHz	dBm	_	26	_
I <sub>DD</sub>	+8 Volts	mA	_	325	385

## **Electrical Specifications: Frequency = 500 MHz, 256 QAM**

Parameter	Test Conditions	Units	Ref Spec⁵	Typical data
Adjacent channel up to 750 KHz from channel block edge	$P_{OUT}$ = +60 dBmV, N=1 $P_{OUT}$ = +56 dBmV, N=2 $P_{OUT}$ = +52 dBmV, N=4	dBc	<-58 <-58 <-58	-65 -65 -66
Adjacent channel (750 kHz from channel block edge to 6 MHz from channel block edge)	P <sub>OUT</sub> = +60 dBmV, N=1 P <sub>OUT</sub> = +56 dBmV, N=2 P <sub>OUT</sub> = +52 dBmV, N=4	dBc	<-62 <-60 <-60	-67 -64 -63
Next-adjacent channel (6 MHz from channel block edge to 18 MHz from channel block edge)	$P_{OUT}$ = +60 dBmV, N=1 $P_{OUT}$ = +56 dBmV, N=2 $P_{OUT}$ = +52 dBmV, N=4	dBc	<-65 <-64 <-63	-75 -70 -65
Third-adjacent channel (12 MHz from channel block edge to 18 MHz from channel block edge)	P <sub>OUT</sub> = +60 dBmV, N=1 P <sub>OUT</sub> = +56 dBmV, N=2 P <sub>OUT</sub> = +52 dBmV, N=4	dBc	<-73 <-70 <-65	-76 -73 -68
In each of 2N contiguous 6 MHz channels or in each of 3N contiguous 6 MHz channels coinciding with 2nd harmonic and with 3rd harmonic components respectively (up to 1000 MHz)	P <sub>OUT</sub> = +60 dBmV, N=1, 2nd Harmonic P <sub>OUT</sub> = +60 dBmV, N=1, 3rd Harmonic	dBc	-63 -63	-70 -65

<sup>5.</sup> Reference Specification Data-Over-Cable Service Interface Specifications, DOCSIS. Downstream RF Interface Specification, DRFI.

North America Tel: 800.366.2266
 India Tel: +91.80.43537383
 Europe Tel: +353.21.244.6400
 China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.



Push Pull CATV Amplifier 50 - 1000 MHz

Rev. V1

#### **Absolute Maximum Ratings** 6,7,8

Parameter	Absolute Maximum
RF Input Power	6 dBm
Voltage	15.0 volts
Operating Temperature	-40°C to +85°C
Junction Temperature <sup>9</sup>	+150°C
Storage Temperature	-65°C to +150°C


- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.
- 8. Operating at nominal conditions with  $T_J \le +150$ °C will ensure MTTF > 1 x  $10^6$  hours.
- Junction Temperature (T<sub>J</sub>) = T<sub>C</sub> + Θjc \* (V \* I)
   Typical thermal resistance (Θjc) = 13 ° C/W.
  - a) For  $T_C = 25^{\circ}C$ ,

T<sub>J</sub> = 65 °C @ 8 V, 385 mA

b) For  $T_C = 85^{\circ}C$ ,

T<sub>J</sub> = 124 °C @ 8 V, 375 mA

#### Land Pattern<sup>10</sup>



10. Vias to be plated solid copper.

## **Handling Procedures**

Please observe the following precautions to avoid damage:

## Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

An external protection circuit using an inexpensive anti-parallel diode pair can be used to protect the IC. Please reference application note AN3028 on http://www.macomtech.com for further detail.


North America Tel: 800.366.2266
 India Tel: +91.80.43537383
 Europe Tel: +353.21.244.6400
 China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.




**Push Pull CATV Amplifier** 50 - 1000 MHz

Rev. V1

## **Application Schematic**

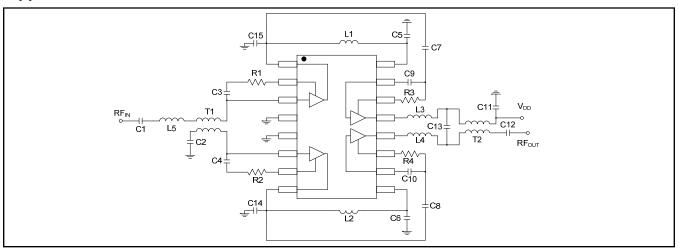

#### **Recommended PCB**

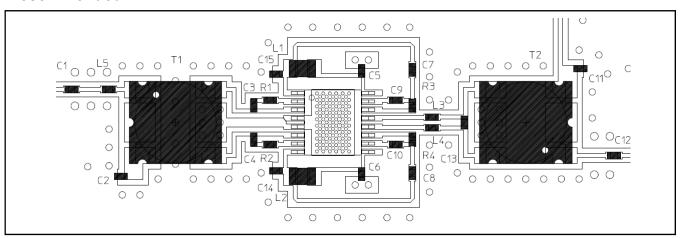

#### Parts List<sup>11</sup>

Component	Value	Package	
C1 - C12	0.01 μF	0402	
C13	2.7 pF	0402	
C14, C15	2.0 pF	0402	
R1 - R4	0 Ω	0402	
L1, L2	390 nH	0805	
L3, L4	2.0 nH	0402	
L5	5.6 nH	0402	
T1, T2	1:1 Baluns		

11. The 1:1 baluns, T1 &T2 are M/A-COM Technology Solutions part number MABA-009210-CT1760

Commitment to produce in volume is not guaranteed.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not quaranteed. PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available.

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.43537383
- China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.




Push Pull CATV Amplifier 50 - 1000 MHz


Rev. V1

### **Typical Performance Curves Over Temperature**


#### Gain to 1 GHz




#### Gain to 3 GHz




#### Input Return Loss




#### **Output Return Loss**



#### Reverse Isolation to 3 GHz



#### Noise Figure



- ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

  PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology
- PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.
- North America Tel: 800.366.2266
   India Tel: +91.80.43537383
   Europe Tel: +353.21.244.6400
   China Tel: +86.21.2407.1588
   Visit www.macomtech.com for additional data sheets and product information.


# MAAM-010144



**Push Pull CATV Amplifier** 50 - 1000 MHz

Rev. V1

## Lead Free TSSOP 16-lead exposed paddle<sup>†</sup>

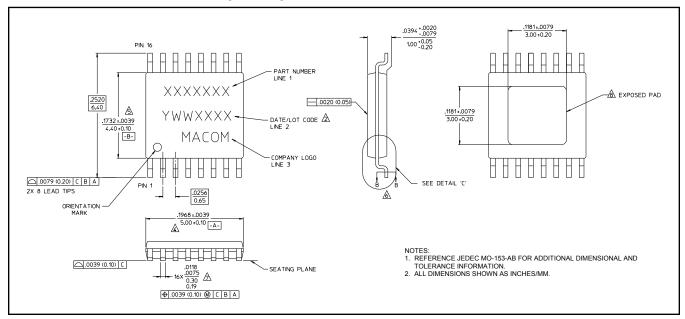

Reference Application Note M538 for lead-free solder reflow recommendations and PCB footprint information. Meets JEDEC moisture sensitivity level 1 requirements. Plating is 100% matte tin over copper.

Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- China Tel: +86.21.2407.1588