

# RoHS Compliant



## 4:1 Flux Coupled Transformer 1-350MHz


**MABACT0067  
V1P**

### Features


- Surface Mount
- 4:1 Impedance
- Excellent amplitude and phase balance
- Can be used in both 50Ω and 75Ω systems
- 260°C Reflow Compatible
- RoHS\* Compliant
- Available on Tape and Reel. Reel quantity 2000

### Description





M/ACom's MABACT0067 is a 4:1 RF flux coupled step up transformer in a low cost, surface mount package. Ideally suited for high volume CATV/ Broadband applications.

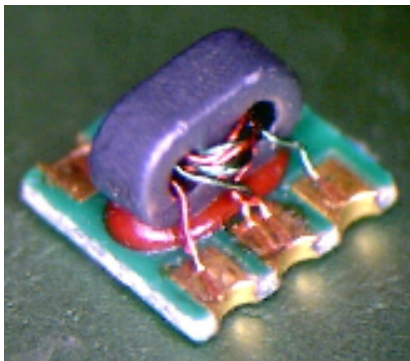

### Schematic

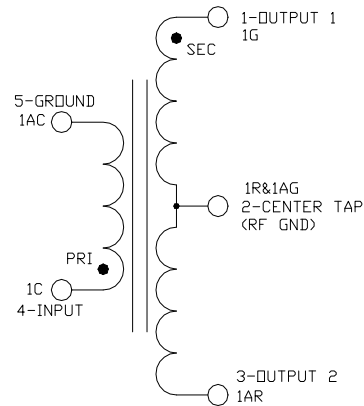

### Case Style: SM-164



Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

### Pin Configuration

Pin No.	Function
1	Secondary Dot (output 1)
2	Centre Tap (ground)
3	Secondary (output 2)
4	Primary Dot (Input)
5	Primary (Ground)

Note: Reference Application Note **M513** for reel size information.

### Ordering Information

Part Number	Package
MABACT0067TR	2000 piece reel

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

1

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400  
• India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## 4:1 Flux Coupled Transformer 1-350MHz

MABACT0067  
V1P

Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\Omega$


Parameter	Test Conditions	Units	Min	Typ	Max
Insertion Loss 1 (pin 4-1)	1 - 5 MHz	dB	-	1.6	2.0
	5 - 200 MHz		-	0.9	1.0
	200 - 350 MHz		-	1.0	1.5
Insertion Loss 2 (pin 4-3)	1 - 5 MHz	dB	-	1.5	2.0
	5 - 150 MHz		-	0.9	1.0
	150 - 350 MHz		-	1.1	1.5
Amplitude Unbalance (Nominal 0dB)	1 - 250 MHz	dB	-	$\pm 0.1$	$\pm 0.2$
	250 - 350 MHz		-	$\pm 0.2$	$\pm 0.3$
Phase Unbalance (Nominal 180°)	1 - 150 MHz	°	-	$\pm 1.0$	$\pm 2.0$
	150 - 350 MHz		-	$\pm 2.0$	$\pm 5.0$
Input Return Loss	1 - 5 MHz	dB	10	12	-
	5 - 200 MHz		15	19	-
	200 - 350 MHz		11	14	-

### Absolute Maximum Ratings <sup>1,2</sup>

Parameter	Absolute Maximum
Max Input Power	250mW
DC current	240mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

### Recommended PCB Configuration

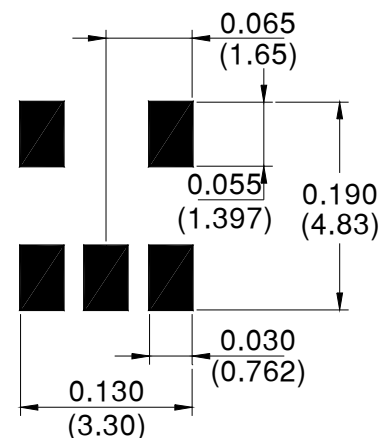

2

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## 4:1 Flux Coupled Transformer 1-350MHz


MABACT0067  
V1P

Typical Performance Curves:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\Omega$


Insertion Loss 1 (pin 4 to pin 1)

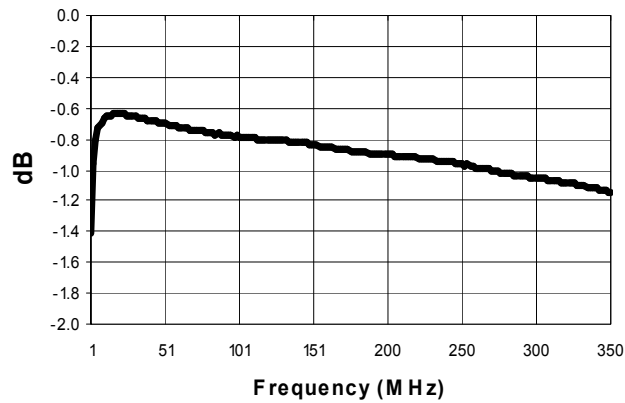


Insertion Loss 2 (pin 4 to pin 3)

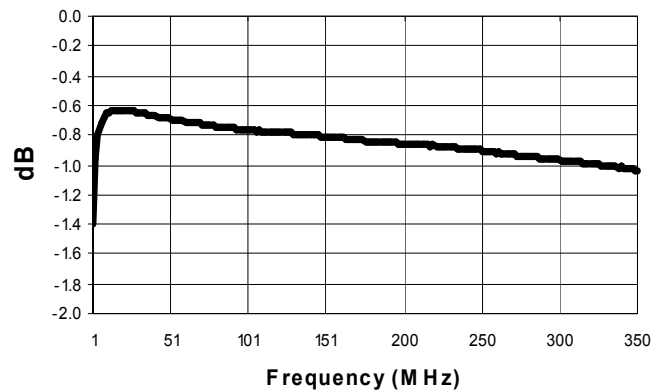

Amplitude Unbalance

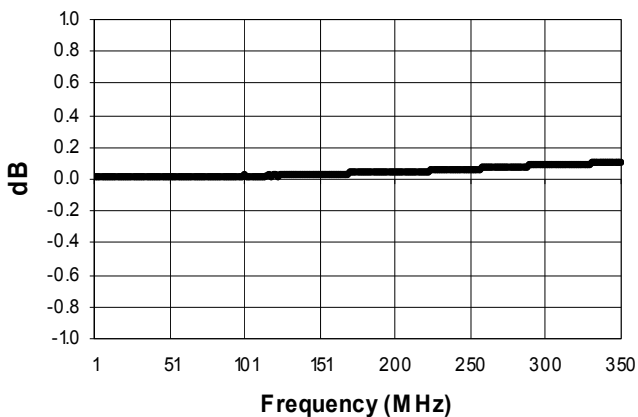

Phase Balance

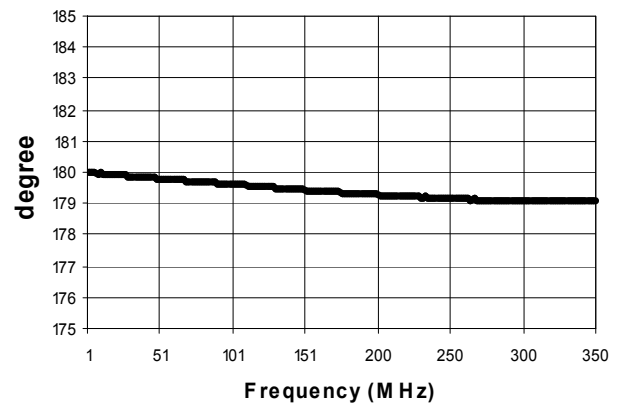

Input Return Loss

