

Termination Insensitive Mixer, 1 - 4000 MHz

Rev. V3

Features

Intermodulation Ratio is Insensitive to Port Mismatches

VSWR: <2.0:1 Typical Midband Isolation: 35 dB Typical Midband Impedance: 50 Ohms Nominal

Maximum Input Power: 350 mW Max @ 25°C, Derated to 85°C @ 3.2 mW/°C


LO Power: +24 dBm Max.

MIL-STD-883 Screening Available


Description

The unique design of the termination insensitive mixer (TIM) enables it to apply high reverse voltage to diodes during their "off" phase, in the LO cycle. This allows for higher power level performance with minimum distortion. In addition the TIM has internal loads that provide a good match and also absorb mixer generated LO frequency Combined, these features give the mixer its insensitivity to external mismatches, plus superior VSWR.

C-7 (MDC-179)

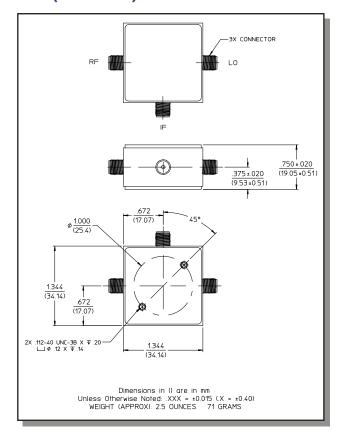

FP-2 (MD-179)

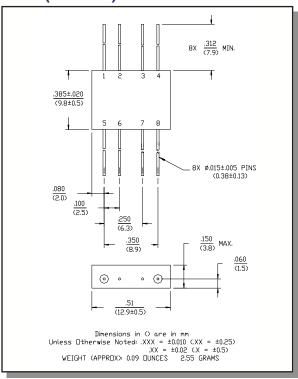

Pin Configuration (MD-179)

Pin No.	Function	Pin No. Function		
1	GND	5	LO	
2	GND	6	GND	
3	GND	7	GND	
4	IF	8	RF	

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

Visit www.macomtech.com for additional data sheets and product information.

• North America Tel: 800.366.2266

• Europe Tel: +353.21.244.6400

• **India** Tel: +91.80.43537383

• China Tel: +86.21.2407.1588

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available.



Termination Insensitive Mixer, 1 - 4000 MHz

Rev. V3

Electrical Specifications¹: $T_A = -55$ °C to +85°C


Parameter	Test Conditions	Frequency	Units	Min	Тур	Max
Frequency Range	RF, LO Ports IF Port	1 - 4000 5 - 1500	MHz MHz	_	_	_
Conversion Loss ^{2,3}		5 - 1000 MHz 5 - 2500 MHz 5 - 3500 MHz 1 - 4000 MHz	dB dB dB dB	 		7.5 8.5 9.5 10.5
Isolation	LO to RF	5 - 1000 MHz 1 - 4000 MHz	dB dB	30 20	_	_
	LO to IF	5 - 1000 MHz 1 - 4000 MHz	dB dB	30 20	_	_
	RF to IF	10 - 500 MHz 1 - 4000 MHz	dB dB	30 16	_	_
RF Input	1 dB Compression 1 dB Desensitization		dBm dBm	_	+5 +3	_
SSB Noise Figure	Within 1 dB of Conversion Loss Max	_	_		_	_
Typical Two-Tone IM Ratio	with a -10 dBm input, each tone 60 MHz IF	10 MHz 500 MHz 3000 MHz	dB dB dB	_ _ _	49 52 50	_ _ _
3rd Order Intermodulation Ratio Degradation	@ IF VSWR 3:1	_	dB	_	3	_

- 1. All specifications apply when operated at +7 dBm available LO power with 50 Ohm source and load impedance.
- 2. For IF Frequencies of 5 300 MHz and RF of -10 dBm or less.
- 3. For MDC-179, add 1.0 dB to conversion loss.


This product contains elements protected by United States Patent Number 4,224,572.

Typical Performance Curves

Conversion Loss - LO @ +7 dBm, IF @ 60 MHz

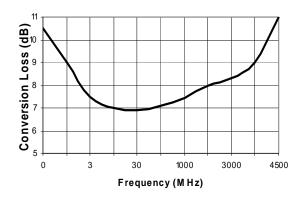

Isolation - Input +7 dBm

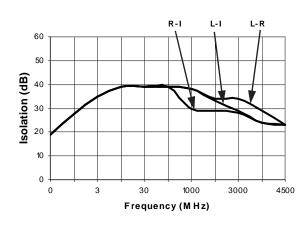

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400 • **India** Tel: +91.80.43537383 • China Tel: +86.21.2407.1588




Termination Insensitive Mixer, 1 - 4000 MHz


Rev. V3

Typical Performance Curves


Conversion Loss vs. LO Power - RF @ 2000 MHz -10 dBm, IF @ 60 MHz

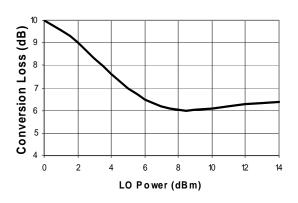


3rd Order IM Ratio - Input +7 dBm

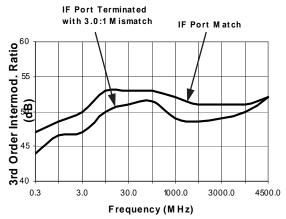

VSWR

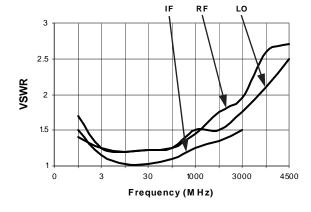

IF Port Response

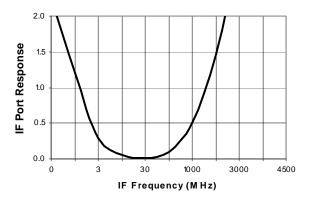

Ordering Information

Part Number	Package		
MD-179 PIN	FP-2		
MDC-179 SMA	C-7		

- North America Tel: 800.366.2266
 - Europe Tel: +353.21.244.6400

ined herein without notice.