



PRESS FIT AUTOMOTIVE RECTIFIER (BOSCH)

PRB251 THRU PRB256

VOLTAGE RANGE 100 to 600 Volts

CURRENT 25.0 Amperes


TECHNICAL SPECIFICATION:

FEATURES

- Low Leakage
- Low forward voltage drop
- High current capability
- High forward surge current capacity

MECHANICAL DATA

- Technology: Cell with Vacuum soldered
- Case: Copper case
- Polarity: As marked of case bottom
- Lead: Plated lead, solderable per MIL-STD-202E method 208C
- Mounting: Press Fit
- Weight: 0.29 ounces, 8.09 grams

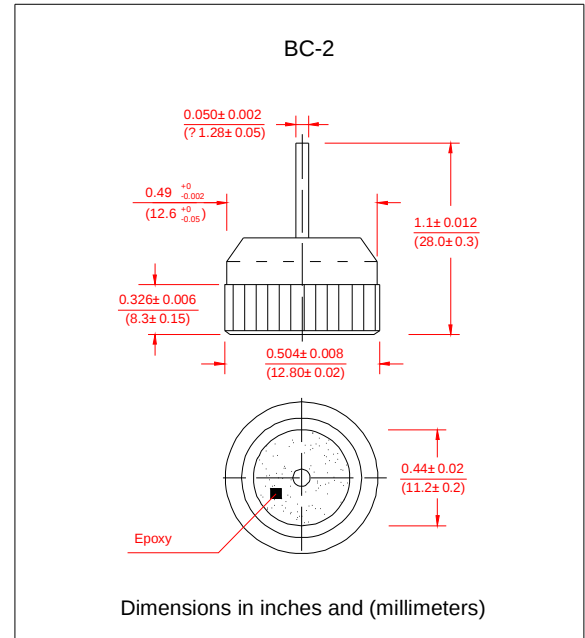

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60HZ, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	PRB251	PRB252	PRB253	PRB254	PRB256	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	300	400	600	Volts
Maximum RMS Voltage	V_{RMS}	70	140	210	280	420	Volts
Maximum DC Blocking Voltage	V_{DC}	100	200	300	400	600	Volts
Maximum Average Forward Rectified Current, At $T_c=105^\circ\text{C}$	$I_{(AV)}$	25					Amps
Peak Forward Surge Current 3.3mS single half sine wave superimposed on Rated load (JEDEC method)	I_{FSM}	400					Amps
Rating for fusing ($t < 8.3\text{ms}$)	I^2t	664					A^2S
Maximum instantaneous Forward Voltage at 100A	V_F	1.08					Volts
Maximum DC Reverse Current at Rated $T_A=25^\circ\text{C}$ DC Blocking Voltage $T_A=100^\circ\text{C}$	I_R	5.0					UA
		450					
Typical Thermal Resistance	$R_{\theta JC}$	0.8					$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	(-65 to +175)					$^\circ\text{C}$

Notes:

1. Enough heat sink must be considered in application.



PRESS FIT AUTOMOTIVE RECTIFIER (BOSCH)


PRB251 THRU PRB256

VOLTAGE RANGE 100 to 600 Volts


CURRENT 25.0 Amperes

RATINGS AND CHARACTERISTIC CURVES PRB251 THRU PRB256


**F1G.1 TYPICAL FORWARD CURRENT
DERATING CURVE**

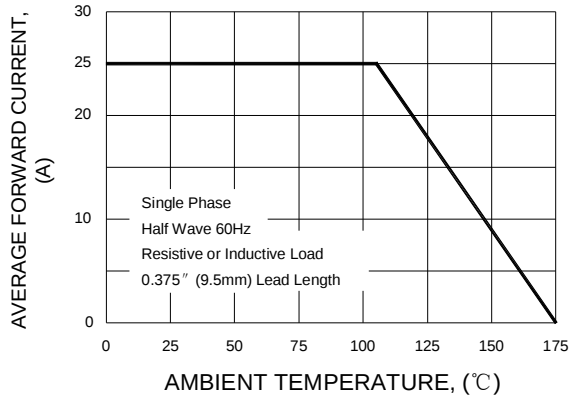

**F1G.2 MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT**

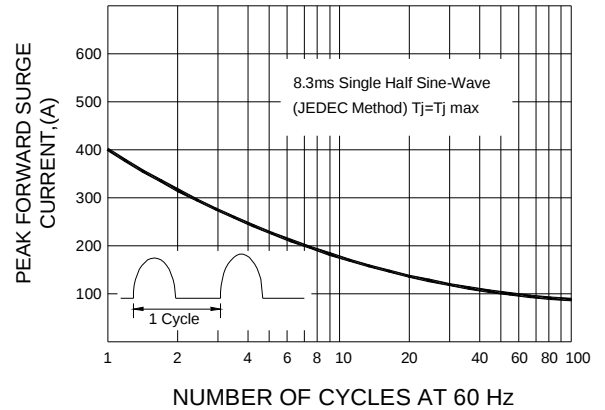

**F1G.3 TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS**

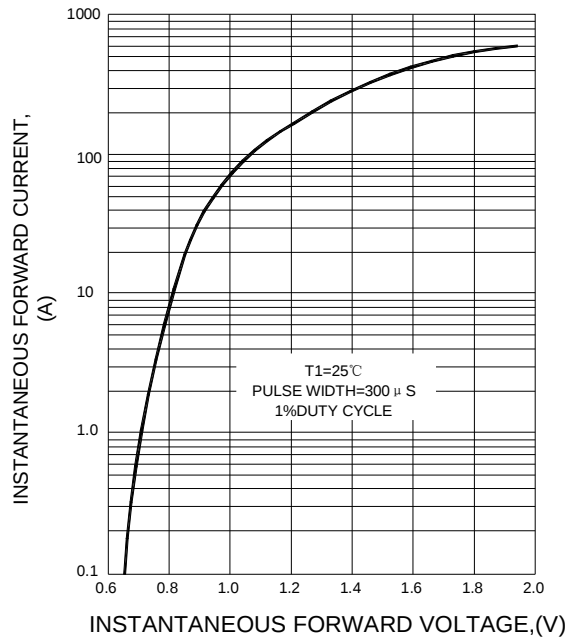

F1G.4 FORWARD POWER DISSIPATION

