

< X/Ku band internally matched power GaAs FET >

MGFK41A4045

14.0 – 14.5 GHz BAND / 12W

DESCRIPTION

The MGFK41A4045 is an internally impedance-matched GaAs power FET especially designed for use in 14.0 – 14.5 GHz band amplifiers. The hermetically sealed metal-ceramic package guarantees high reliability.

FEATURES

Internally impedance matched

- High output power
P1dB=41dBm (TYP.) @f=14.0 – 14.5GHz
- High linear power gain
GLP=7.0dB (TYP.) @f=14.0 – 14.5GHz

APPLICATION

- For use in 14.0 – 14.5 GHz band amplifiers

QUALITY GRADE

- IG

RECOMMENDED BIAS CONDITIONS

- VDS=10V • ID=3.0A • RG=50ohm

Absolute maximum ratings (Ta=25°C)


Symbol	Parameter	Ratings	Unit
VGDO	Gate to drain breakdown voltage	-15	V
VGSO	Gate to source breakdown voltage	-10	V
ID	Drain current	11	A
IGR	Reverse gate current	-36	mA
IGF	Forward gate current	72	mA
PT *1	Total power dissipation	68.2	W
Tch	Channel temperature	175	°C
Tstg	Storage temperature	-65 to +175	°C

*1 : Tc=25°C

Electrical characteristics (Ta=25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IDSS	Saturated drain current	VDS=3V, VG=0V	-	8	-	A
gm	Transconductance	VDS=0V, ID=3.0A	-	4	-	S
VGS(off)	Gate to source cut-off voltage	VDS=3V, ID=42mA	-1	-1.5	-4	V
P1dB	Output power at 1dB gain compression	VDS=10V, ID(RF off)=3.0A	40	41	-	dBm
GLP	Linear Power Gain	f=14.0 – 14.5GHz	6	7	-	dB
PAE	Power added efficiency		-	25	-	%
Rth(ch-c) *2	Thermal resistance	delta Vf method	-	1.8	2.2	°C/W

*2 : Channel-case

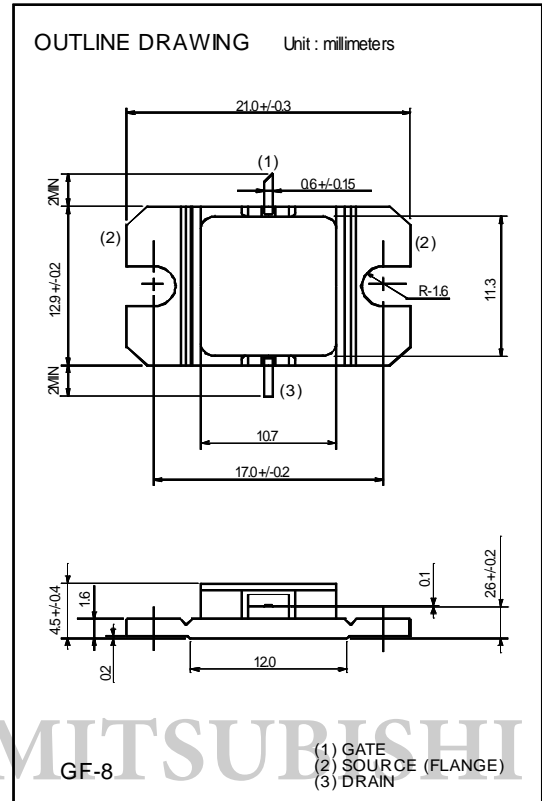

Keep Safety first in your circuit designs!


Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measure such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

MGFK41A4045

14.0 – 14.5 GHz BAND / 12W

MGFK41A4045 TYPICAL CHARACTERISTICS


Pout, Glp, PAE, Id, Ig vs. Pin

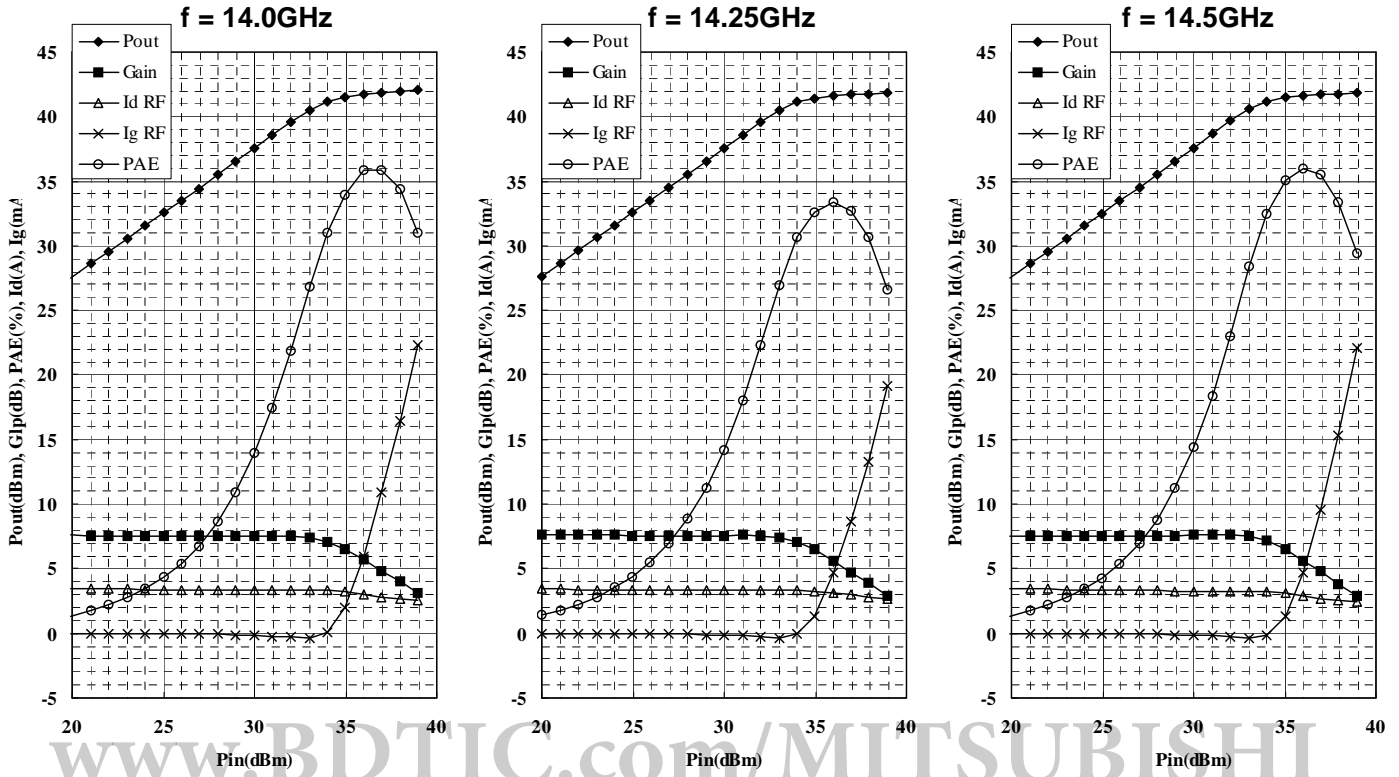

Test Condition

Vds=10V, Idq=3.0A, Rg=50ohm, Ta=25deg.C

Pout, IM3 vs. Pin

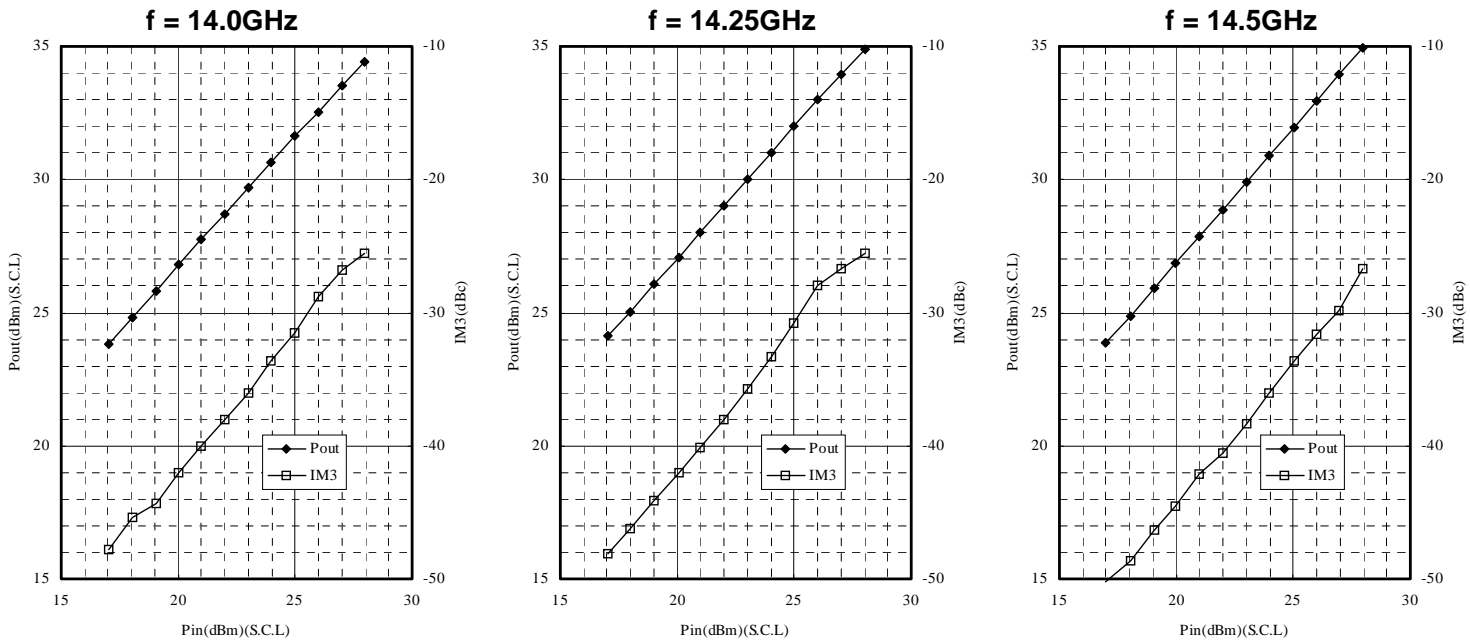

Test Condition

Vds=10V, Idq=3.0A, Rg=50ohm, Ta=25deg.C

2-tone test, $\Delta f=10\text{MHz}$

< X/Ku band internally matched power GaAs FET >

MGFK41A4045

14.0 – 14.5 GHz BAND / 12W

MGFK41A4045 S-parameters(Ta=25deg.C , VDS=10(V),IDS=3(A))

f (GHz)	S Parameters (TYP.)							
	S11		S21		S12		S22	
	Mag.	Ang(deg.)	Mag.	Ang(deg.)	Mag.	Ang(deg.)	Mag.	Ang(deg.)
13.00	0.738	-103.4	1.278	34.7	0.057	14.1	0.668	-81.0
13.10	0.716	-109.9	1.349	26.6	0.060	7.6	0.649	-87.3
13.20	0.693	-116.7	1.427	18.2	0.064	0.8	0.628	-93.7
13.30	0.665	-123.8	1.517	9.1	0.068	-6.4	0.609	-101.0
13.40	0.633	-132.2	1.607	-0.1	0.074	-13.6	0.588	-109.0
13.50	0.593	-140.9	1.705	-10.3	0.081	-22.2	0.559	-118.7
13.60	0.546	-151.8	1.809	-23.6	0.087	-33.8	0.521	-131.2
13.70	0.493	-162.0	1.896	-34.7	0.095	-42.9	0.482	-141.7
13.80	0.434	-172.4	1.976	-46.0	0.102	-53.5	0.434	-153.0
13.90	0.369	175.1	2.059	-58.0	0.109	-63.7	0.383	-167.1
14.00	0.303	161.4	2.132	-70.3	0.118	-75.4	0.324	177.1
14.10	0.238	144.2	2.192	-83.2	0.122	-88.5	0.266	159.0
14.20	0.176	120.7	2.241	-96.3	0.127	-100.8	0.215	135.8
14.30	0.118	83.1	2.268	-110.1	0.131	-113.0	0.176	104.0
14.40	0.106	28.9	2.263	-124.6	0.130	-126.2	0.166	64.0
14.50	0.156	-12.7	2.217	-138.9	0.130	-138.3	0.179	28.6
14.60	0.225	-38.3	2.134	-153.0	0.126	-151.4	0.216	0.6
14.70	0.281	-57.4	2.018	-167.1	0.121	-163.3	0.266	-17.8
14.80	0.335	-72.0	1.885	179.9	0.113	-173.9	0.318	-32.7
14.90	0.381	-86.1	1.750	166.9	0.105	176.0	0.353	-46.8
15.00	0.413	-98.3	1.616	154.8	0.098	166.5	0.368	-59.2

www.BDTIC.com/MITSUBISHI

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.

The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.MitsubishiElectric.com/>).

- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.