

Plug-In Two-Way Power Divider, 5 - 500 MHz

Rev. V3

Features

- Low Cost
- Convenient Plug-In Mounting
- Impedance: 50 Ohms Nominal
- Maximum Power Rating or Input Power: 1 Watt Max.
- Internal Load Dissipation: 0.125 Watts Max.
- MIL-STD-202 Screening Available


Description

A Power Divider is ideally a lossless reciprocal device which can also perform vector summation of two or more signals and thus is sometimes called a power combiner or summer.

Pin Configuration

Pin No.	Function	Pin No. Function	
1	Σ	5	Output
2	GND	6	Output
3	GND	7	GND
4	GND	8	GND

RH-1

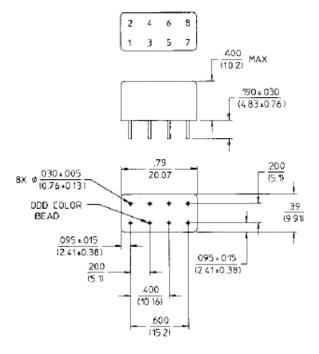

Dimensions in 0 are in mm Unless Diherwise Noted: XXX = 40,010 (XX = 40,25) WEIGHT (APPROX): 0.23 OUNCES = 6.5 GRAMS

Electrical Specifications¹: $T_A = -55$ °C to +85°C

Parameter	Test Conditions	Frequency	Units	Min	Тур	Max
Insertion Loss	Less Coupling	10 - 200 MHz 5 - 500 MHz	dB dB			0.5 1.0
Isolation	_	5 - 500 MHz	dB	18	_	_
Amplitude Balance	_	5 - 500 MHz	dB	_	_	0.2
Phase Balance	_	5 - 500 MHz	0	_	_	2
VSWR	All Ports	5 - 500 MHz	Ratio	_	_	1.5:1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not gui

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
 China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

^{1.} All specifications apply with 50 ohm source and load impedance. This product contains elements protected by United States Patent Number 3,428,920.



Plug-In Two-Way Power Divider, 5 - 500 MHz


Rev. V3

Typical Performance Curves


Insertion Loss

Insertion Loss 2.6 1.6 1.4 1.2 1.0 0.8 0.6 0.4 500 Frequency (MHz)

Isolation

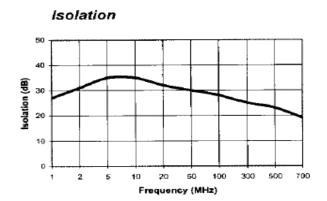

VSWR

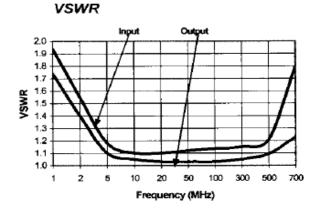

Ordering Information

Part Number	Package		
DS-318 PIN	RH-1		

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not gui