

Broadband CATV 6-Way Active Splitter with default loop-through Switch 50 - 1100 MHz

Rev. V1

Features

- Always ON loop-through path
- 6-Way Splitter
- 2.0 dB Gain
- +15 dBm V /Channel Input
- Single 5 Volt Supply
- Lead-Free 4 mm 24-Lead PQFN Package
- RoHS* Compliant and 260°C Reflow Compatible


Description

The MAAM-010263 CATV 6-way active splitter with the default loop-through path is a GaAs MMIC which exhibits low noise figure and distortion in a lead-free 4mm 24-lead PQFN plastic package. The design features 75 Ω inputs and outputs.


The MAAM-010263 is ideally suited for multi-tuner set top boxes, home gateways, and other broadband internet based applications.

The MAAM-010263 is fabricated using M/A-COM Technology Solutions' E/D pHEMT process to realize default loop-through operation, low noise and low distortion. The process features full passivation for robust performance and reliability.

Functional Schematic, Default On, Power Off

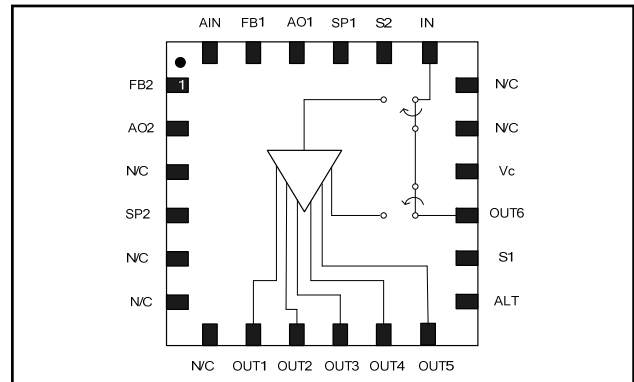

Functional Schematic, Power On

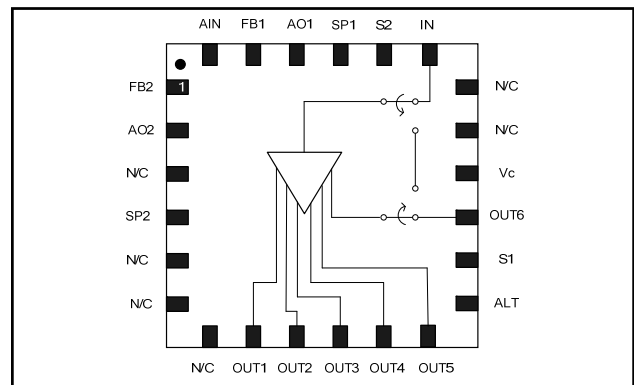

Pin Configuration

Pin No.	Description	Pin No.	Description
1	Feedback 2	13	Alternate Output
2	Amplifier 2	14	Switch In
3	No Connection	15	RF Output 6
4	Splitter 2	16	Voltage Control
5	No Connection	17	No Connection
6	No Connection	18	No Connection
7	No Connection	19	RF Input
8	RF Output 1	20	Switch Output
9	RF Output 2	21	Splitter 1
10	RF Output 3	22	Amplifier Output 1
11	RF Output 4	23	Feedback 1
12	RF Output 5	24	Amplifier Input
		Paddle ³	RF and DC Ground

3. The exposed pad centered on the package bottom must be connected to RF and DC ground.

Ordering Information ^{1,2}

Part Number	Package
MAAM-010263-TR1000	1000 piece reel
MAAM-010263-TR3000	3000 piece reel
MAAM-010263-001SMB	Sample Test Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

*Restrictions on Hazardous Substances,
European Union Directive 2002/95/EC.

1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Broadband CATV 6-Way Active Splitter with default loop-through Switch 50 - 1100 MHz

Rev. V1

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$

Parameter	Test Conditions	V _{DD}	V _C	Units	Min.	Typ.	Max.
Gain	In to Out1, 2, 3, 4, 5 or 6 400 MHz 900 MHz	5	3.3	dB	0 -	2.0 2.0	4.0 -
Insertion Loss	In to Out6 400 MHz 900 MHz	0	0	dB	- -	0.5 1	0.7 -
Noise Figure	In to Out1, 2, 3, 4, 5, or 6	5	3.3	dB	-	4.8	-
Gain Flatness	In to Out1, 2, 3, 4, 5, or 6	5	3.3	dB	-	1.5	-
Input Return Loss	Gain State	5	3.3	dB	-	12	-
Input Return Loss	Insertion Loss State	0	0	dB	-	12	-
Output Return Loss	Gain State	5	3.3	dB	-	10	-
Output Return Loss	Insertion Loss State	0	0	dB	-	12	-
Out to Out Isolation	Out1 to Out2, 3, 4, 5, or 6	5	3.3	dB	-	25	-
Out to Out Isolation	Out1 to Out2, 3, 4, or 5	0	0	dB	-	30	-
CTB	132 Ch, +15 dBmV/Ch at the Input	5	3.3	dBc	-	-65	-
CSO	132 Ch, +15 dBmV/Ch at the Input	5	3.3	dBc	-	-55	-
Reverse Isolation	Out1, 2, 3, 4, 5 to In	5	3.3	dB	-	35	-
Reverse Isolation	Out6 to In	5	3.3	dB	-	30	-
Reverse Isolation	Out1, 2, 3, 4, 5 to In	0	0	dB	-	40	-
OIP2	500 MHz, 2-tone, 6 MHz spacing, -10 dBm Pout	5	3.3/0	dBm	-	32	-
OIP3	500 MHz, 2-tone, 6 MHz spacing, -10 dBm Pout	5	3.3/0	dBm	-	22	-
P1dB	500 MHz	5	3.3	dBm	-	6	-
P1dB	500 MHz	5	0	dBm	-	25	-
I _{DD}	-	5	3.3	mA	-	190	220
I _C	-	5	3.3	μA	-	230	300


4. The unpowered state is the same as V_{control} = 0 V

Absolute Maximum Ratings ^{5,6}

Parameter	Absolute Maximum
Max Input Power	+5 dBm
V _{DD}	+10.0 V
V _{CONTROL}	+8.5 V
Junction Temperature ^{7,8}	+150°C
Operating Temperature	-20°C to +85°C
Storage Temperature	-65°C to +150°C

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.
7. Operating at nominal conditions with T_J ≤ +150°C will ensure MTTF > 1 x 10⁶ hours..
8. Junction Temperature (T_J) = T_A + Θ_{Jc} * (V * I)
Typical thermal resistance (Θ_{Jc}) = 73 °C/W.
 - a) For T_A = 25°C,
T_J = 95 °C @ 5.0 V, 190 mA
 - b) For T_A = 85°C,
T_J = 149 °C @ 5.0 V, 175 mA

PCB Land Pattern

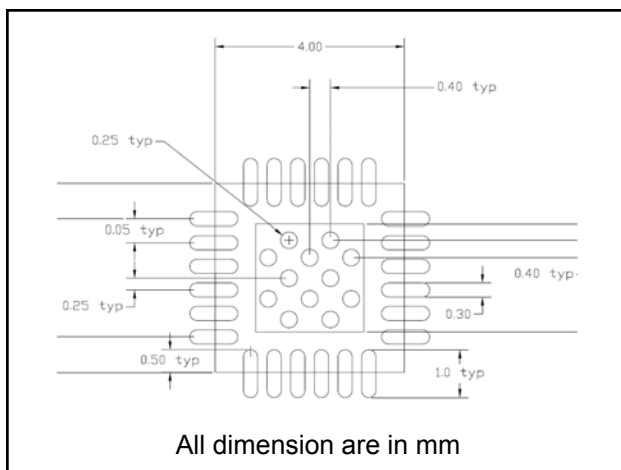

Truth Table ⁹

V _{DD}	V _{CONTROL}	IN - OUT1, 2, 3, 4, or 5	IN - OUT6
1	1	On	On
0	0	Off	On

9. Logic "1" for V_{DD} = +5 volts and V_{CONTROL} = +3.3 volts typical.

Handling Procedures


Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices. An external protection circuit using an anti-parallel diode pair can be used to protect the IC.


Please reference application note AN3028 on <http://www.macomtech.com> for further detail.

Schematic Including Off-Chip Components¹⁰

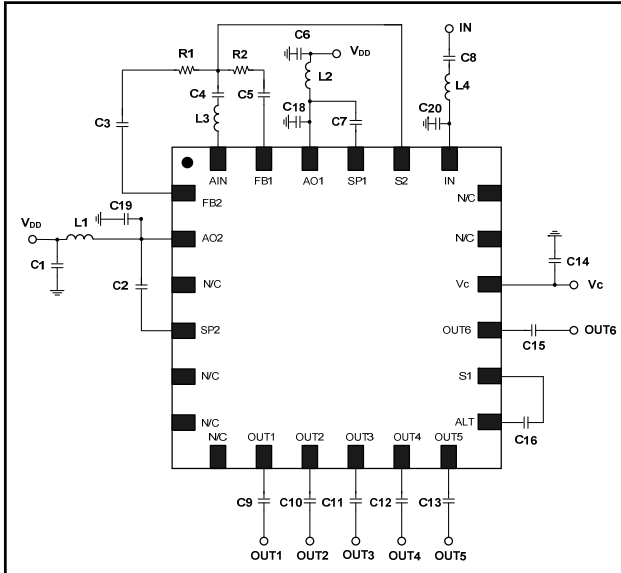

10. The exposed pad centered on the package bottom must be connected to ground for RF, DC and thermal considerations.

Recommended PCB Layout

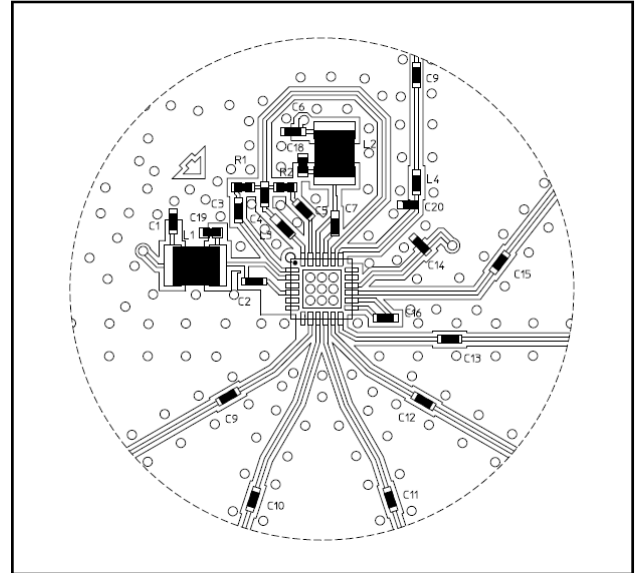


Off-Chip Component Values


Component	Value	Package
C1 - C16	0.01 μ F	0402
C18, C19	1.5 pF	0402
C20	1.8 pF	0402
L1, L2 ¹¹	1 μ H	1210
L3	4.7 nH	0402
L4	6.8 nH	0402
R1, R2	523 Ω	0402

11. L1 & L2 supplied from EPCOS, part number B82422A1102K100


Block Diagram RF Signal Flow

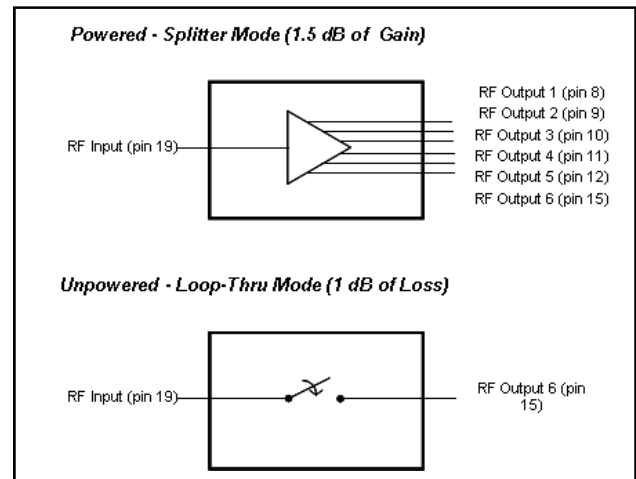


Typical Performance Curves

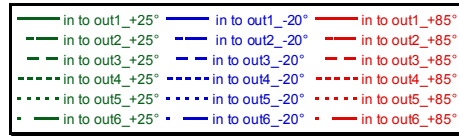


Gain

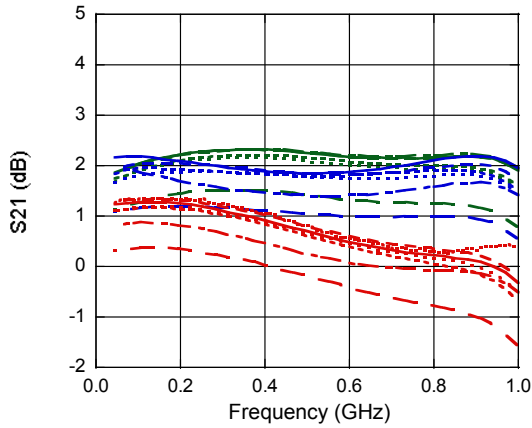


Gain to 3 GHz

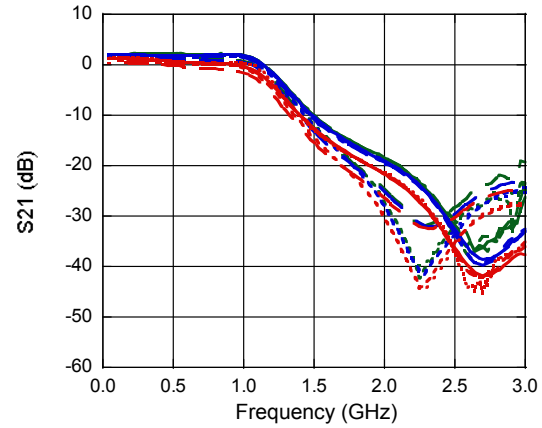


Input Return Loss (power on)

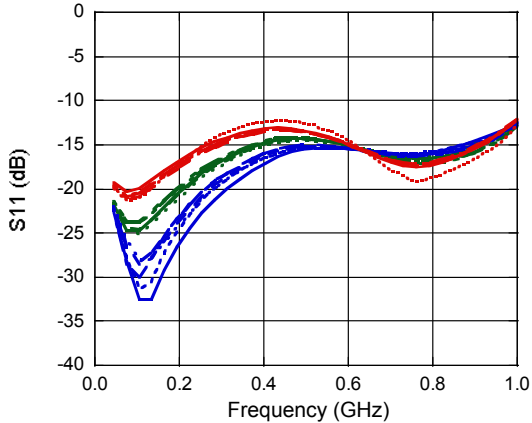


Input Return Loss (power off)

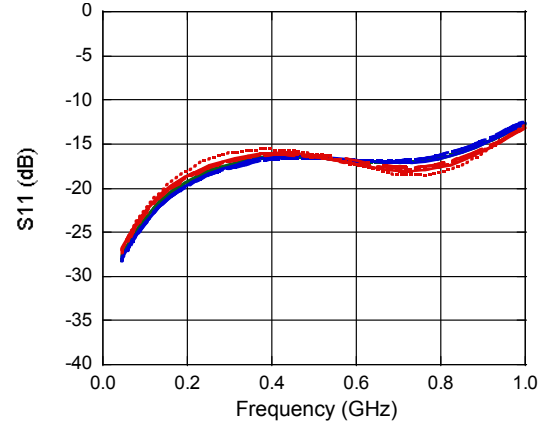

Output Return Loss (power on)

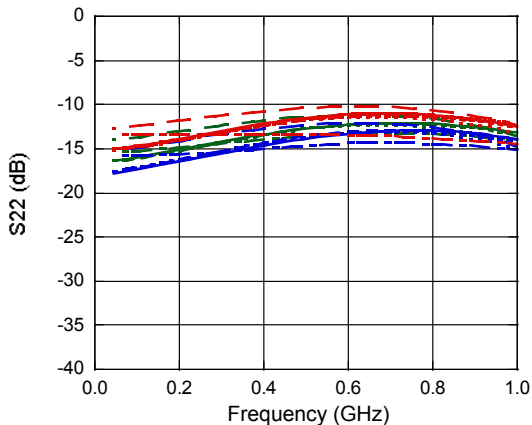

Output Return Loss (power off)

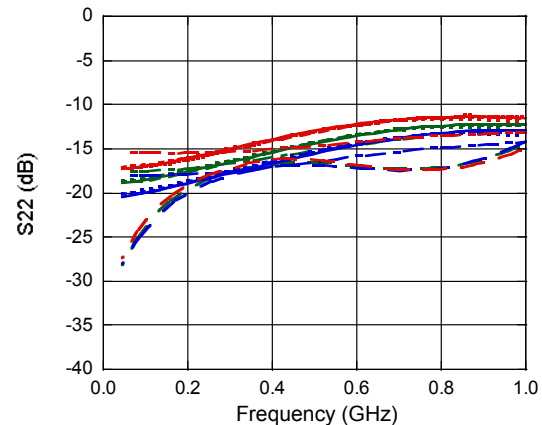


ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.



M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Typical Performance Curves


Insertion Loss to 1 GHz (power off)

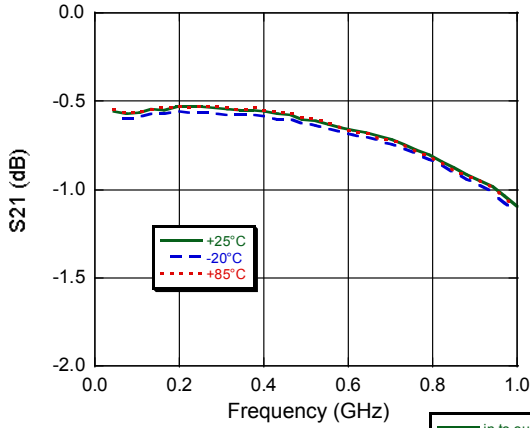


Insertion Loss to 3 GHz (power off)

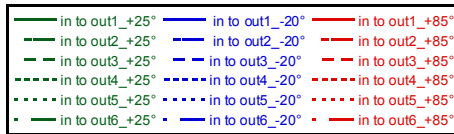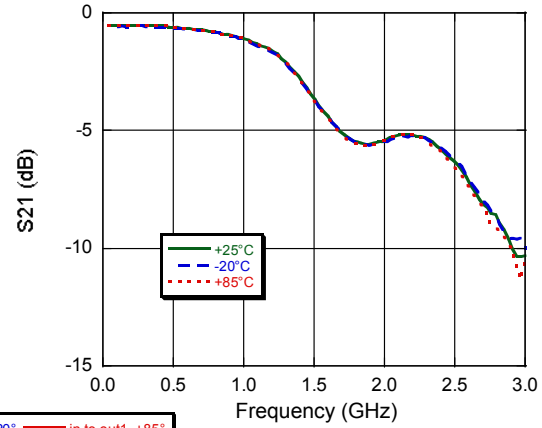


Reverse Isolation to 3 GHz (power on)

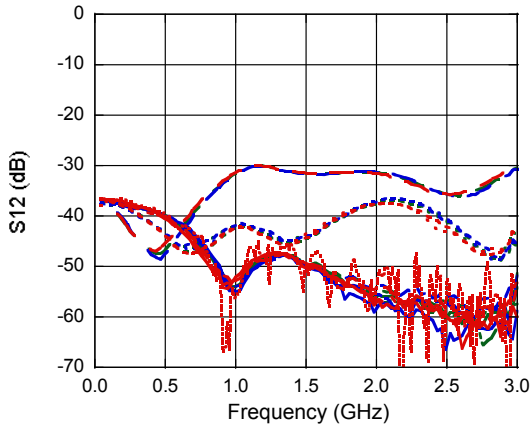

Reverse Isolation to 3 GHz (power off)

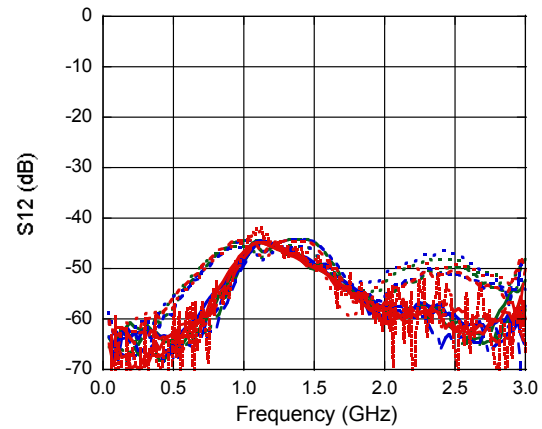

Noise Figure

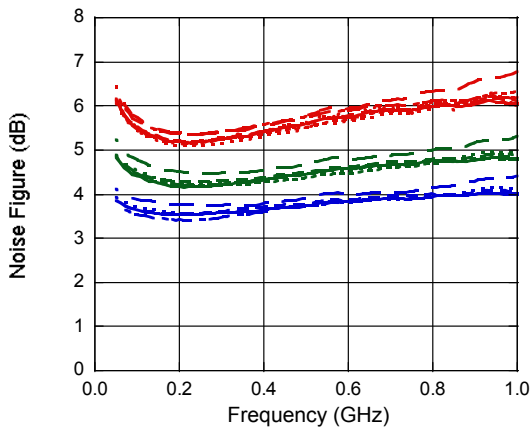


ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


Typical Performance Curves




Out to Out Isolation to 1 GHz (power on)

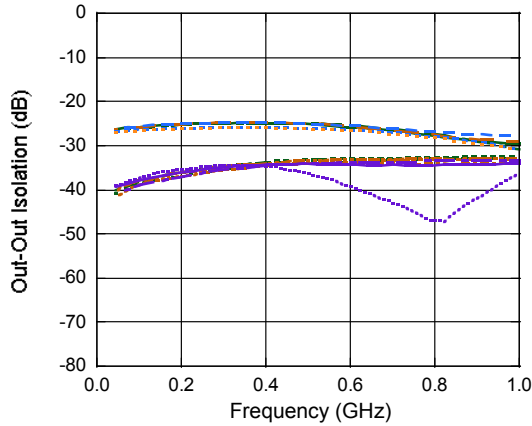


Out to Out Isolation to 3 GHz (power on)

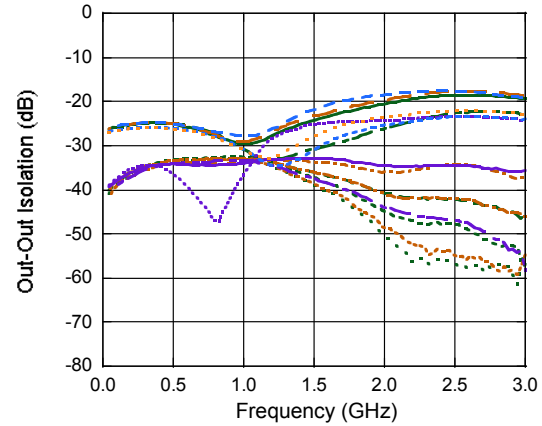


Out to Out Isolation to 1 GHz (power off)

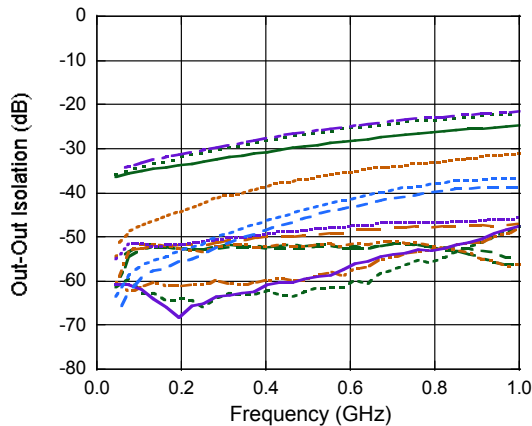

Out to Out Isolation to 3 GHz (power off)

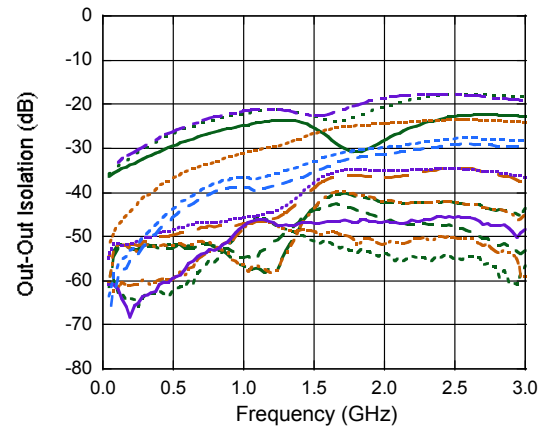

Lead-Free 4 mm 24-Lead PQFN†

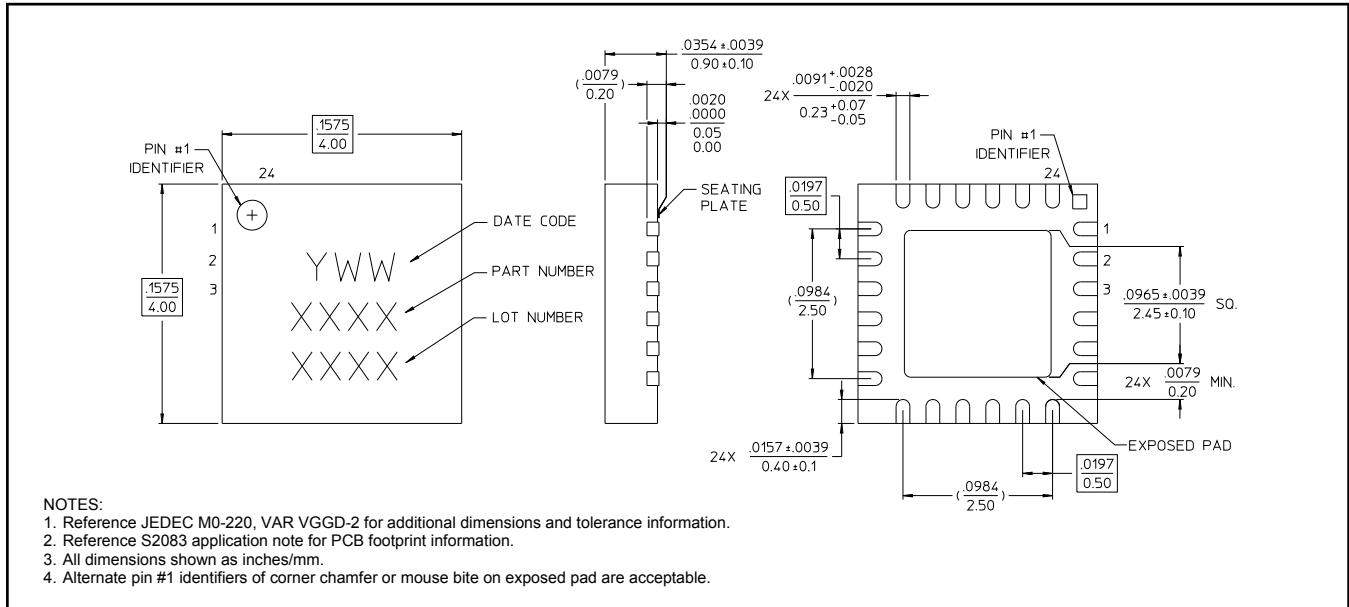

† Reference Application Note S2083 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level 1 requirements.
Plating is 100% matte tin over copper.