

E-Series Surface Mount Mixer 10 – 2000 MHz

MAMX-007253-ES0067
V1 P


Features

- LO Power +10 dBm
- -5 dBm RF
- Surface Mount
- Tape and reel packaging available
- 260°C Reflow Compatible
- RoHS* compliant version of the MAMXES0067

Description

M/A-COM's MAMX-007253-ES0067 is a RoHS Compliant Low Cost, Broadband, high performance Double Balanced Mixer designed for use in high volume wireless applications. The device has been optimized by careful selection of the Schottky Diode and Balun Transformer for excellent performance. The MAMX-007253-ES0067 is available in an SM-2 surface mount package and is designed to be utilized in both standard reflow and high temperature soldering reflow profiles. Parts are packaged in tape & reel.

SM - 2 Package

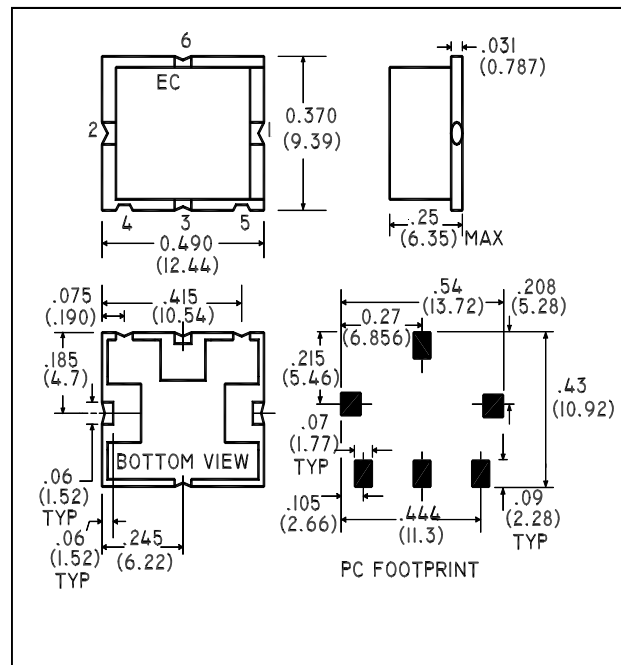

Ordering Information

Part Number	Package
MAMX-007253-ES0067	Tape and Reel (500 piece Reel)

Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum
RF Input Power	+10dBm
LO Drive Power	+15dBm
Peak IF Current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +125°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

Pin Configuration

Pin No.	Function
1	LO
2	RF
3	IF
4	Ground
5	Ground
6	Ground

This PRELIMINARY Data Sheet contains information regarding a product M/A-COM has under development. Performance is based on measured results and target specifications. Commitment to produce in volume is not guaranteed.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

RoHS Compliant



E-Series Surface Mount Mixer
10 – 2000 MHz

MAMX-007253-ES0067
V1 P

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $LO = +7\text{ dBm}$

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	10 - 2000	MHz	—	—	—
LO Frequency	—	10 - 2000	MHz	—	—	—
IF Frequency	—	10 - 800	MHz	—	—	—
Conversion Loss	—	20 - 1000 10 - 2000	dB dB	— —	7.5 8.0	8.0 8.5
Isolation	LO to RF	10 – 2000	dB	20	30	—
Isolation	LO to IF	10 – 2000	dB	15	30	—

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc and its affiliates reserve the right to make changes to the products or information contained herein without notice.