


## Test Procedure for the STK433-040NGEVB Evaluation Board


### Characteristics confirmation

#### [Connection Diagram]

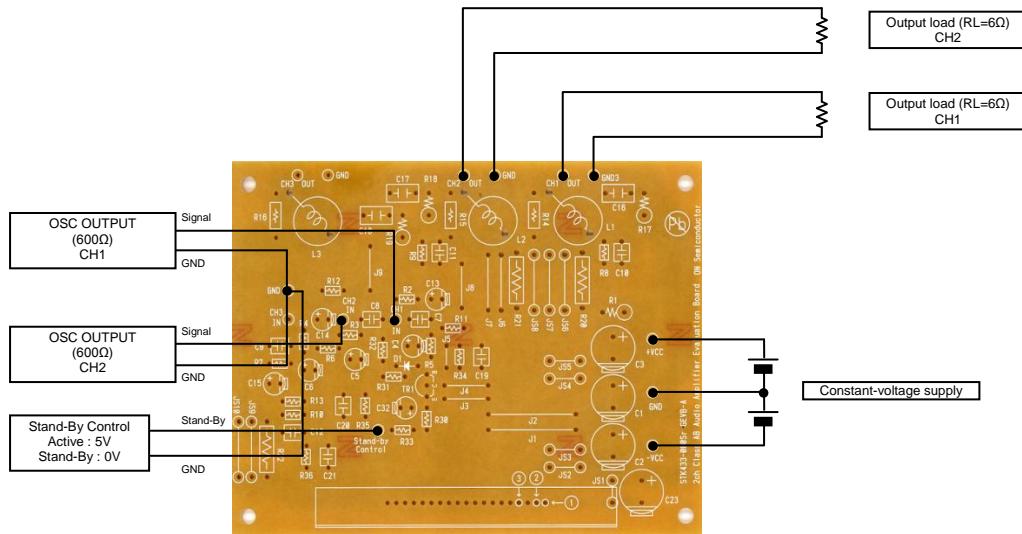

### Sound quality confirmation, load short-circuit test, noise examination

#### [Connection Diagram]

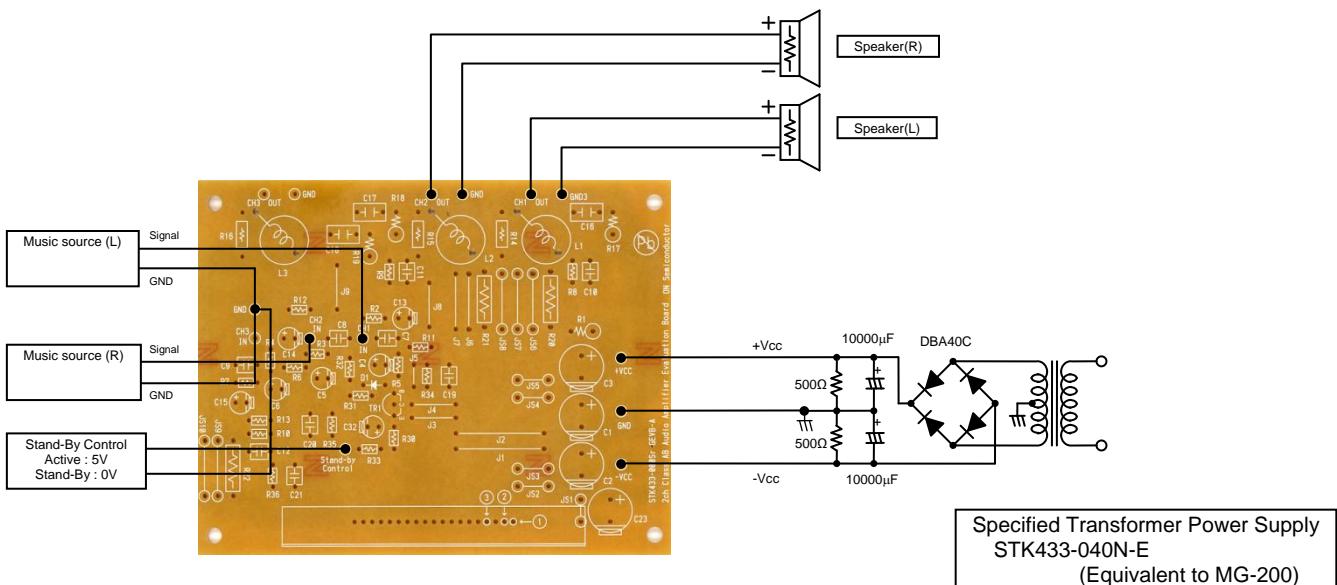



SANYO Semiconductors

[Required Equipment]

| Equipment                     | Efficiency                          |
|-------------------------------|-------------------------------------|
| Power supply +Vcc             | 50V-5A                              |
| Power supply -Vcc             | 50V-5A                              |
| Power supply Stand-By Control | 10V-1A                              |
| Load                          | 60Ω (Non-inductive load)            |
| Measurement                   | Audio analyzer (Panasonic VP-7723B) |

[Supply Voltage]

+Vcc/-Vcc : Power Supply for audio power amplifiers

|                                    |            |
|------------------------------------|------------|
| Output 1 (10%/1kHz)                | 40W x 2 ch |
| Output 2 (0.4%/2Hz-20kHz)          | 25W x 2 ch |
| Recommended operating<br>Vcc (60Ω) | ±24V       |

Stand-By Control (5V) : Power Supply for Stand-By Control Input

5V : Operation / 0V : Stand-by

[Operation Guide]

1. Installation of the heat sink
  2. Load Connection
  3. Power Supply Connection
  4. Stand-By Control Connection
  5. Input Connection
  6. Power Supply
- Please refer to a thermal design tip for the amplifier.  
Connect the  $RL=6\Omega$  (Non-inductive load)  
Connect the +Vcc/-Vcc (Output off : 0V)  
Stand-By Control = 0V . Stand-by  
Connect the Oscillator (Sine wave / Output resistance  
 $600\Omega$ )  
The gain of the evaluation board is set in 30dB.  
At first, supply DC voltage to +Vcc and -Vcc.  
Next, Stand-By Control = 5V . Operation

