



SURFACE MOUNT GLASS PASSIVATED RECTIFIER

SM4001 THRU SM4007

VOLTAGE RANGE

50 to 1000 Volts

CURRENT


1.0 Ampere

FEATURES

- For surface mounted applications
- Glass passivated chip junction
- Low leakage current
- Plastic package has underwrites laboratory flammability Classification 94V-0
- High temperature soldering guaranteed 250°C/10 second at terminals

MECHANICAL DATA

- Case: molded plastic
- Polarity: band indicate cathode
- Mounting position: Any
- Weight: 0.12 grams

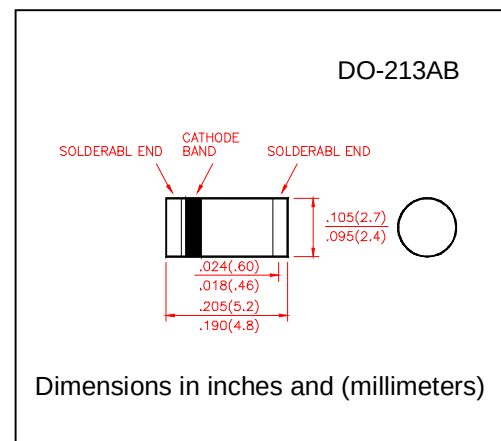

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	SM 4001	SM 4002	SM 4003	SM 4004	SM 4005	SM 4006	SM 4007	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at T _T =100℃		I _(AV)	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	30							Amps
Maximum Instantaneous Forward Voltage at 1.0A		V _F	1.1							Volts
Maximum DC Reverse Current at rated DC Blocking Voltage at	T _A = 25℃	I _R	5.0							μA
	T _A = 125℃		100							
Typical Junction Capacitance (Note 1)		R _{θJT}	15							PF
Typical Thermal Resistance (Note 2)		T _{rr}	40							℃/W
Operating and Storage Temperature Range		T _J , T _{STG}	-55 to +150							℃

Notes:

1. Measured at 1.0MHz and applied reverse voltage of 4.0 volts DC.
2. Thermal resistance from Junction to terminal 6.0mm² copper pads to each terminal.




SURFACE MOUNT GLASS PASSIVATED RECTIFIER

SM4001 THRU SM4007


VOLTAGE RANGE 50 to 1000 Volts
CURRENT 1.0 Ampere

RATINGS AND CHARACTERISTIC CURVES SM4001 THRU SM4007


F1G.1-FORWARD CURRENT
DERATING CURVE

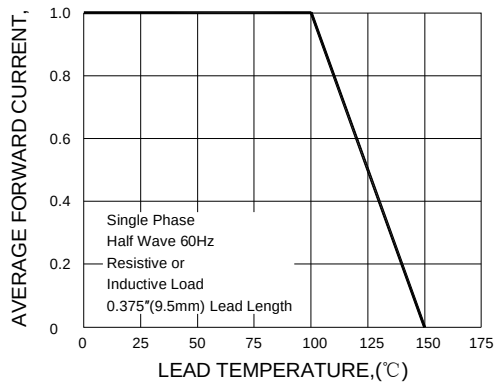


F1G.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

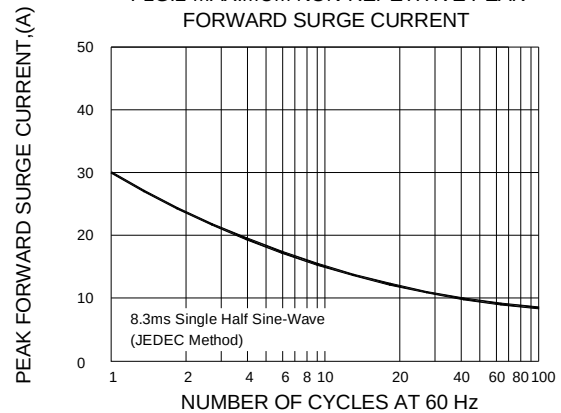

F1G.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

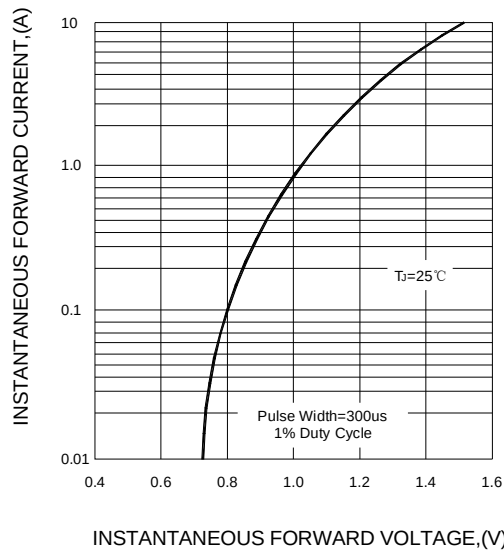

F1G.4-TYPICAL REVERSE
CHARACTERISTICS

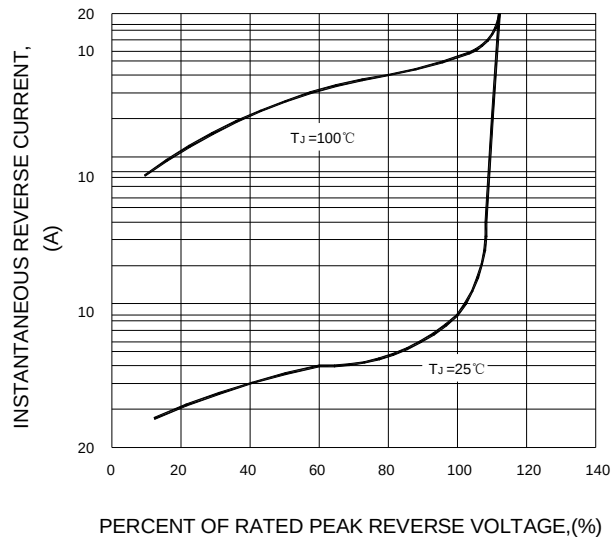

F1G.5-TYPICAL JUNCTION CAPACITANCE

