



MASTER INSTRUMENT CORPORATION

SURFACE MOUNT Low VF SCHOTTKY BARRIER RECTIFIER SSL12 THRU SSL14


VOLTAGE RANGE 20 to 40 Volts
Forward Current 1.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:
260 °C/10 seconds at terminals

MECHANICAL DATA

- Case: JEDEC DO-214AC molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750 method 2026
- Polarity: Color band denotes cathode
- Weight: 0.002ounce, 0.064 gram

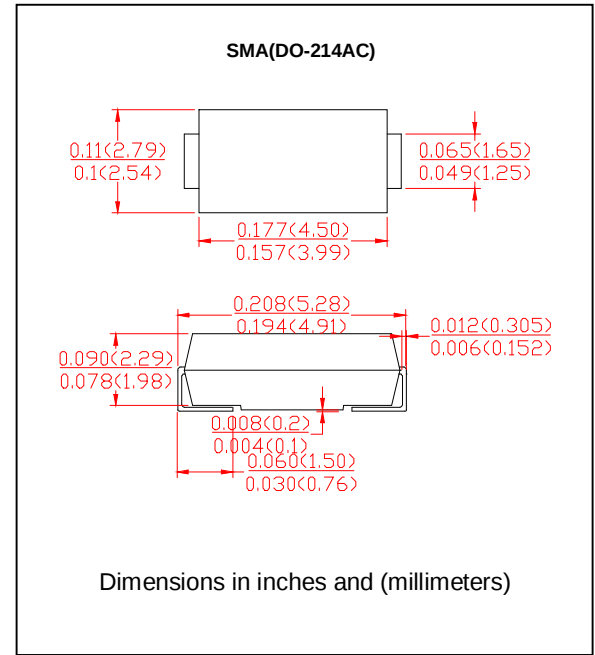

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SSL12	SSL13	SSL14	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	Volts
Maximum Average Forward Rectified Current, At T _L see figure 1	I _(AV)	1.0			Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	30.0			Amps
Maximum Instantaneous Forward Voltage @ 1.0A (Note 1)	V _F	0.38		0.45	Volts
Maximum DC Reverse Current at Rated T _A = 25 °C (Note 1)	I _R	0.5			mA
DC Blocking Voltage per element T _A = 100 °C		20.0			
Typical Thermal Resistance (Note 2)	R _{θJA}	88			°C/W
	R _{θJL}	28			
Operating Junction Temperature	T _J	-50 to+125			°C
Storage Temperature Rang	T _{STG}	-50 to +150			°C

Notes:

1. Pulse test: 300 μs pulse width, 1% duty cycle
2. Mounted on P.C. Board with 8.0mm² (.013cm thick) copper pad areas



MASTER INSTRUMENT CORPORATION

SURFACE MOUNT Low VF SCHOTTKY BARRIER
RECTIFIER
SSL12 THRU SSL14

VOLTAGE RANGE 20 to 40 Volts
Forward Current 1.0 Amperes

RATING AND CHARACTERISTIC CURVES

SSL12 THRU SSL14

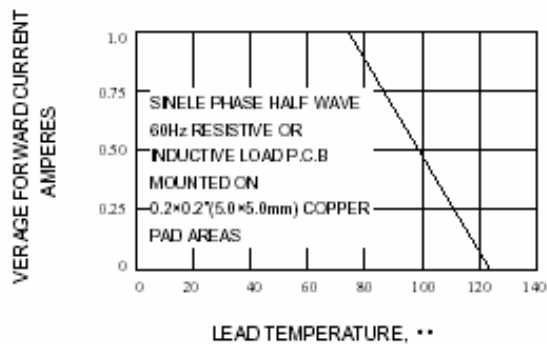


Fig. 1-FORWARD CURRENT DERATING CURVE

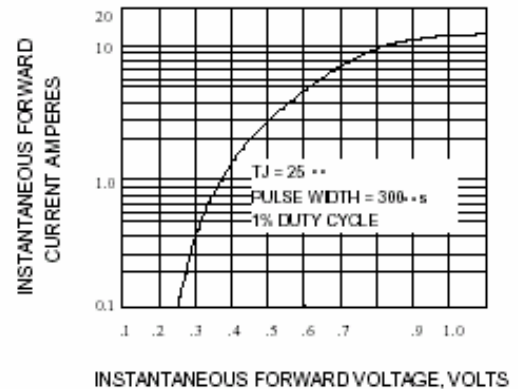


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

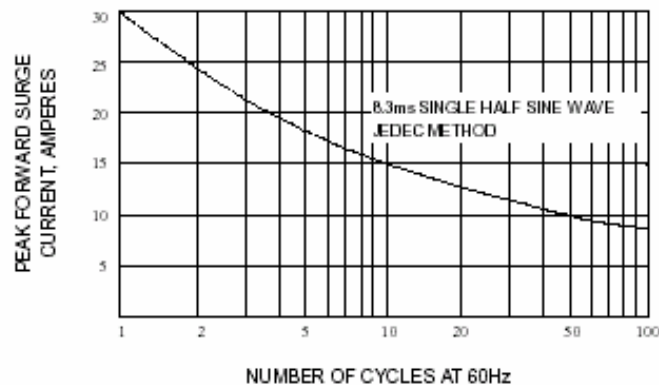


Fig. 3-MAXIMUM NON-REPETITIVE SURGE CURRENT

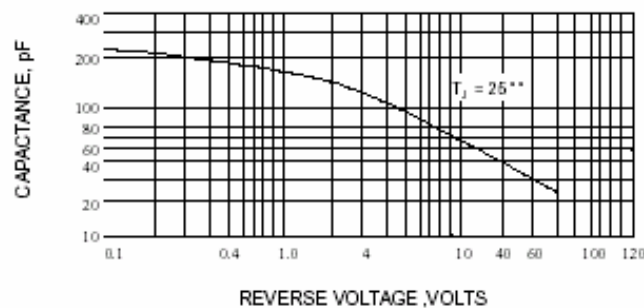


Fig. 4-TYPICAL JUNCTION CAPACITANCE



MASTER INSTRUMENT CORPORATION

SURFACE MOUNT Low VF SCHOTTKY BARRIER RECTIFIER SSL12 THRU SSL14


VOLTAGE RANGE 20 to 40 Volts
Forward Current 1.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:
260 °C/10 seconds at terminals

MECHANICAL DATA

- Case: JEDEC DO-214AC molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750 method 2026
- Polarity: Color band denotes cathode
- Weight: 0.002ounce, 0.064 gram

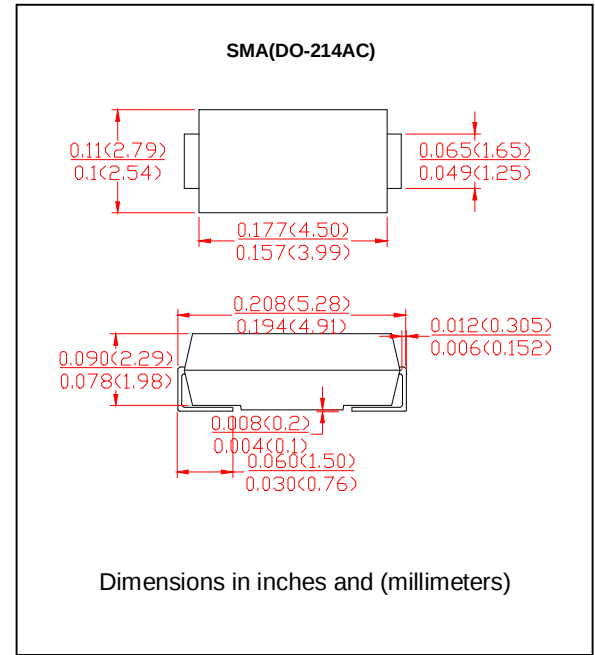

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SSL12	SSL13	SSL14	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	Volts
Maximum Average Forward Rectified Current, At T _L see figure 1	I _(AV)	1.0			Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	30.0			Amps
Maximum Instantaneous Forward Voltage @ 1.0A (Note 1)	V _F	0.38		0.45	Volts
Maximum DC Reverse Current at Rated T _A = 25 °C (Note 1)	I _R	0.5			mA
DC Blocking Voltage per element T _A = 100 °C		20.0			
Typical Thermal Resistance (Note 2)	R _{θJA}	88			°C/W
	R _{θJL}	28			
Operating Junction Temperature	T _J	-50 to+125			°C
Storage Temperature Rang	T _{STG}	-50 to +150			°C

Notes:

1. Pulse test: 300 μs pulse width, 1% duty cycle
2. Mounted on P.C. Board with 8.0mm² (.013cm thick) copper pad areas



MASTER INSTRUMENT CORPORATION

SURFACE MOUNT Low VF SCHOTTKY BARRIER
RECTIFIER
SSL12 THRU SSL14

VOLTAGE RANGE 20 to 40 Volts
Forward Current 1.0 Amperes

RATING AND CHARACTERISTIC CURVES

SSL12 THRU SSL14

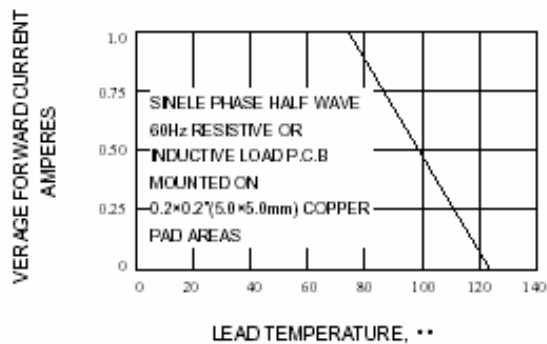


Fig. 1-FORWARD CURRENT DERATING CURVE

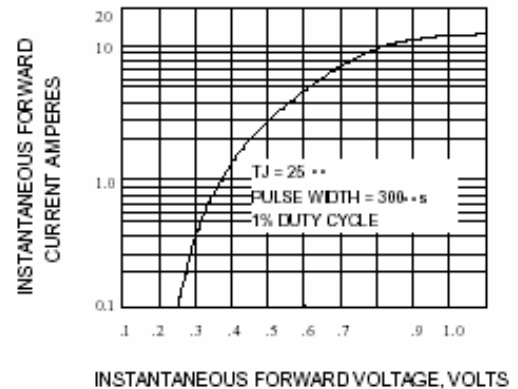


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

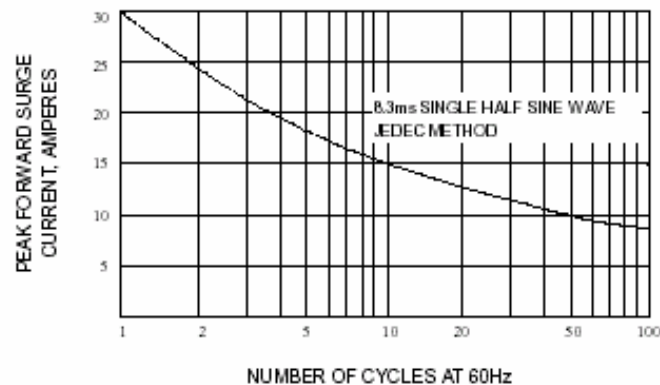


Fig. 3-MAXIMUM NON-REPETITIVE SURGE CURRENT

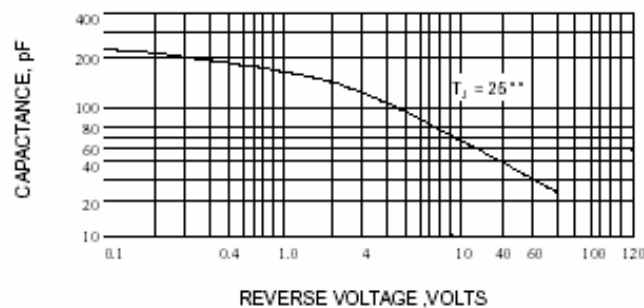


Fig. 4-TYPICAL JUNCTION CAPACITANCE



MASTER INSTRUMENT CORPORATION

SURFACE MOUNT Low VF SCHOTTKY BARRIER RECTIFIER SSL12 THRU SSL14


VOLTAGE RANGE 20 to 40 Volts
Forward Current 1.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:
260 °C/10 seconds at terminals

MECHANICAL DATA

- Case: JEDEC DO-214AC molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750 method 2026
- Polarity: Color band denotes cathode
- Weight: 0.002ounce, 0.064 gram

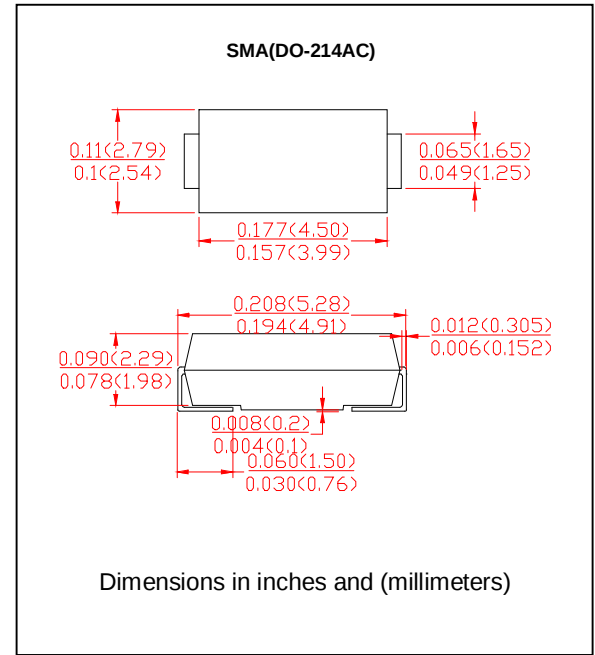

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SSL12	SSL13	SSL14	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	Volts
Maximum Average Forward Rectified Current, At T _L see figure 1	I _(AV)	1.0			Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	30.0			Amps
Maximum Instantaneous Forward Voltage @ 1.0A (Note 1)	V _F	0.38		0.45	Volts
Maximum DC Reverse Current at Rated T _A = 25 °C (Note 1)	I _R	0.5			mA
DC Blocking Voltage per element T _A = 100 °C		20.0			
Typical Thermal Resistance (Note 2)	R _{θJA}	88			°C/W
	R _{θJL}	28			
Operating Junction Temperature	T _J	-50 to+125			°C
Storage Temperature Rang	T _{STG}	-50 to +150			°C

Notes:

1. Pulse test: 300 μs pulse width, 1% duty cycle
2. Mounted on P.C. Board with 8.0mm² (.013cm thick) copper pad areas



MASTER INSTRUMENT CORPORATION

**SURFACE MOUNT Low VF SCHOTTKY BARRIER
RECTIFIER
SSL12 THRU SSL14**

**VOLTAGE RANGE 20 to 40 Volts
Forward Current 1.0 Amperes**

RATING AND CHARACTERISTIC CURVES

SSL12 THRU SSL14

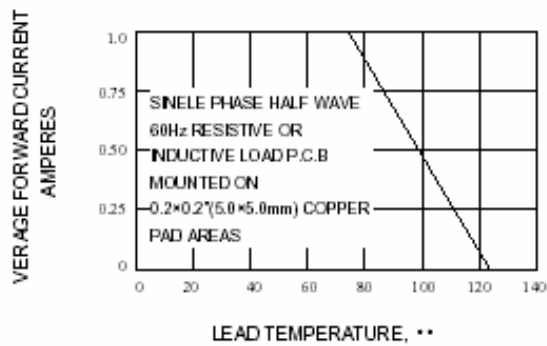


Fig. 1-FORWARD CURRENT DERATING CURVE

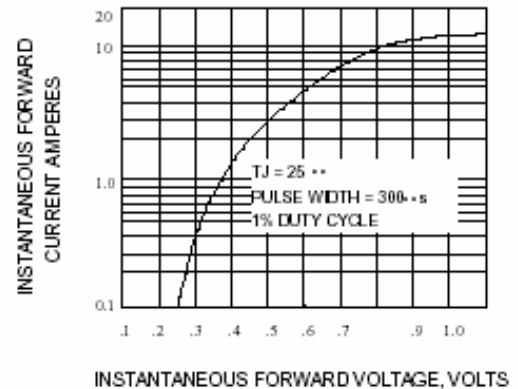


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

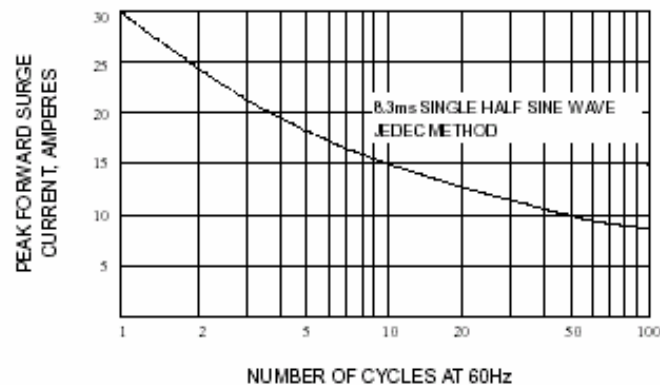


Fig. 3-MAXIMUM NON-REPETITIVE SURGE CURRENT

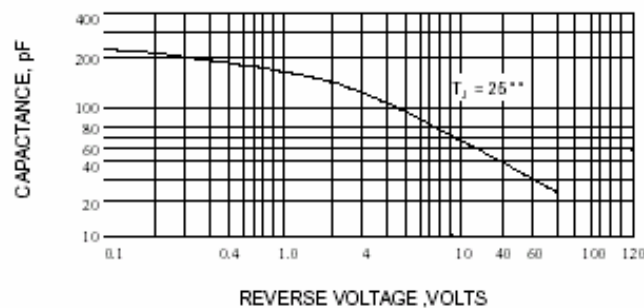


Fig. 4-TYPICAL JUNCTION CAPACITANCE



MASTER INSTRUMENT CORPORATION

SURFACE MOUNT Low VF SCHOTTKY BARRIER RECTIFIER SSL12 THRU SSL14


VOLTAGE RANGE 20 to 40 Volts
Forward Current 1.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:
260 °C/10 seconds at terminals

MECHANICAL DATA

- Case: JEDEC DO-214AC molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750 method 2026
- Polarity: Color band denotes cathode
- Weight: 0.002ounce, 0.064 gram

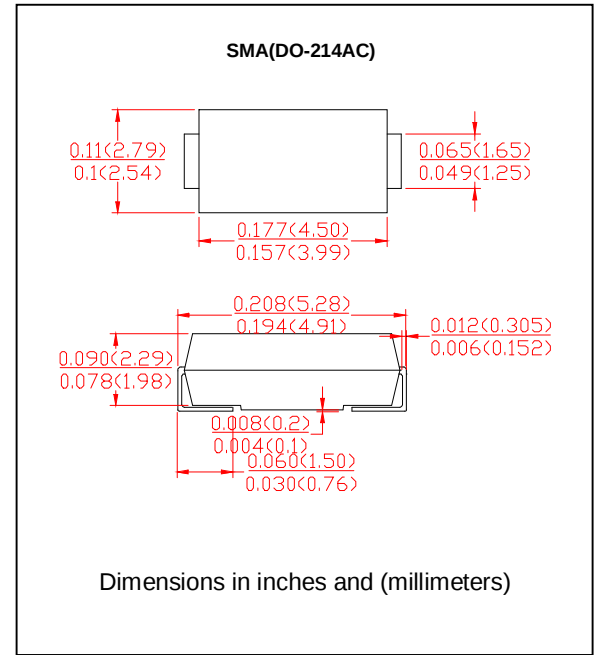

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SSL12	SSL13	SSL14	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	Volts
Maximum Average Forward Rectified Current, At T _L see figure 1	I _(AV)	1.0			Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	30.0			Amps
Maximum Instantaneous Forward Voltage @ 1.0A (Note 1)	V _F	0.38		0.45	Volts
Maximum DC Reverse Current at Rated T _A = 25 °C (Note 1)	I _R	0.5			mA
DC Blocking Voltage per element T _A = 100 °C		20.0			
Typical Thermal Resistance (Note 2)	R _{θJA}	88			°C/W
	R _{θJL}	28			
Operating Junction Temperature	T _J	-50 to+125			°C
Storage Temperature Rang	T _{STG}	-50 to +150			°C

Notes:

1. Pulse test: 300 μ S pulse width, 1% duty cycle
2. Mounted on P.C. Board with 8.0mm² (.013cm thick) copper pad areas



MASTER INSTRUMENT CORPORATION

**SURFACE MOUNT Low VF SCHOTTKY BARRIER
RECTIFIER
SSL12 THRU SSL14**

**VOLTAGE RANGE 20 to 40 Volts
Forward Current 1.0 Amperes**

RATING AND CHARACTERISTIC CURVES

SSL12 THRU SSL14

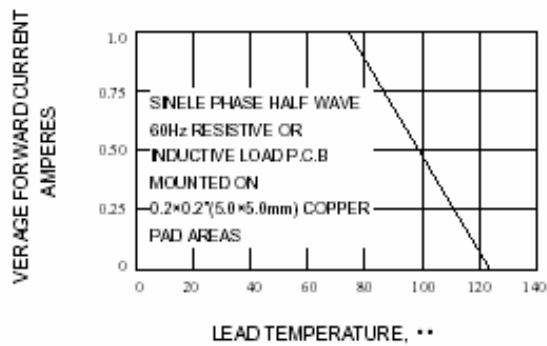


Fig. 1-FORWARD CURRENT DERATING CURVE

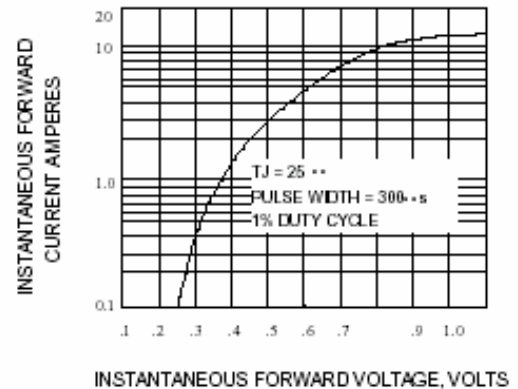


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

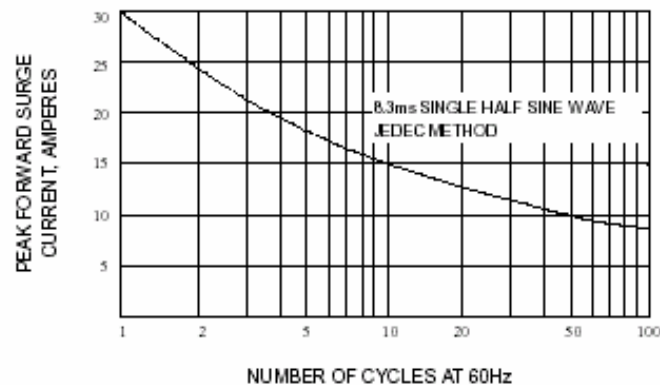


Fig. 3-MAXIMUM NON-REPETITIVE SURGE CURRENT

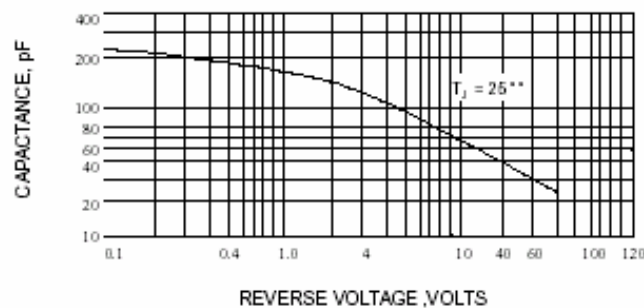


Fig. 4-TYPICAL JUNCTION CAPACITANCE