



SURFACE MOUNT GLASS PASSIVATED FAST RECOVERY SILICON RECTIFIER

USM101 THRU USM108


VOLTAGE RANGE	50 to 1000 Volts
CURRENT	1.0 Ampere

FEATURES

- For surface mounted applications
- Glass passivated chip junction
- Low leakage current
- Fast switching
- Plastic package has underwrites laboratory flammability Classification 94V-0
- High temperature soldering guaranteed
250°C/10 second at terminals

MECHANICAL DATA

- Case: molded plastic
- Polarity: band indicate cathode
- Mounting position: Any
- Weight: 0.12 grams

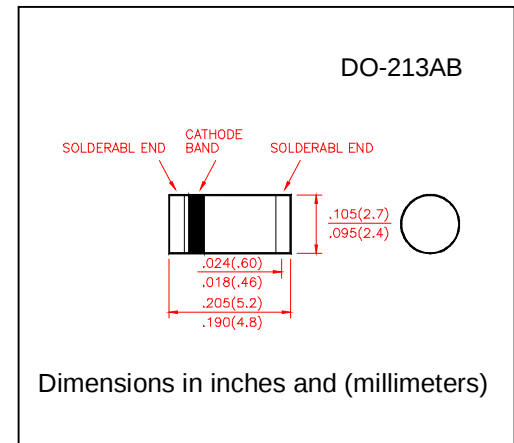

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	USM 101	USM 102	USM 103	USM 104	USM 105	USM 106	USM 107	USM 108	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at T _T =100℃		I _(AV)	1.0								Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)		I _{FSM}	30								Amps
Maximum Instantaneous Forward Voltage at 1.0A		V _F	1.0			1.3		1.7			Volts
Maximum DC Reverse Current at rated DC Blocking Voltage at	T _A = 25℃	I _R	5.0								μA
	T _A = 125℃		100								
Typical Reverse Recovery Time (NOTE 1)		T _{rr}	50					100			ns
Typical Junction Capacitance (Note 2)		C _J	15								PF
Typical Thermal Resistance (Note 3)		R _{θJT}	40								℃ / W
Operating and Storage Temperature Range		T _J , T _{STG}	-55 to +150								℃

Notes:

1. Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$
2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.
3. Thermal resistance Junction to terminal 6.0mm² copper pads to each terminal.



SURFACE MOUNT GLASS PASSIVATED FAST RECOVERY SILICON RECTIFIER

USM101 THRU USM108

VOLTAGE RANGE 50 to 1000 Volts
CURRENT 1.0 Ampere

RATINGS AND CHARACTERISTIC CURVES USM101 THRU USM108

FIG.1-FORWARD CURRENT
DERATING CURVE

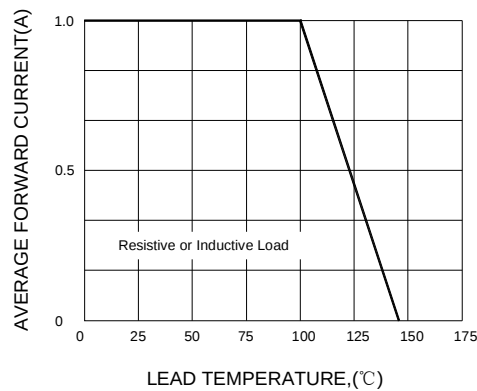


FIG.2-MAXIMUM NON-PERITITIVE PEAK
FORWARD SUPGE CURRENT

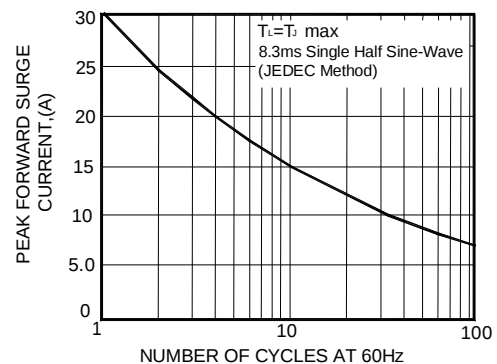


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

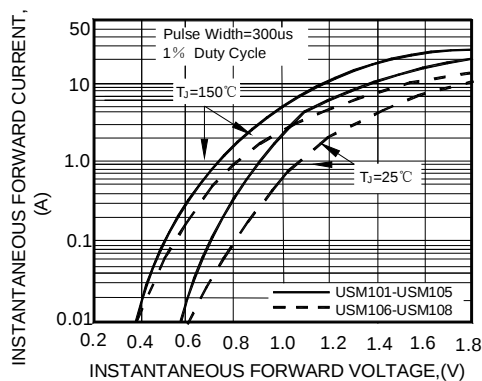


FIG.4-TYPICAL REVERSE LEAKAGE
CHARACTERISTICS

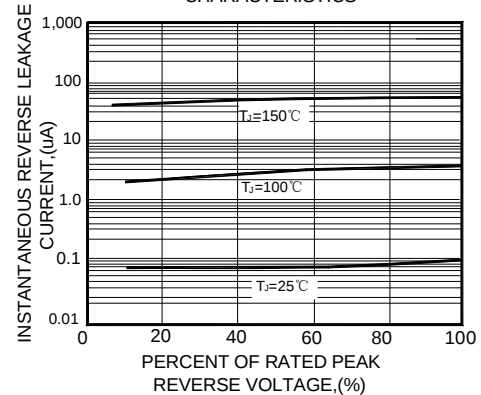


FIG.5-TYPICAL JUNCTION CAPACITANCE

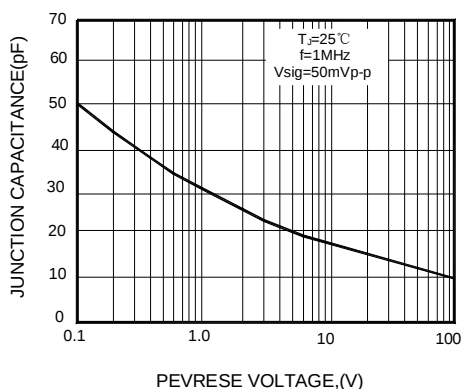


FIG.6-TYPICAL TRANSIENT THERMAL
IMPEDANCE

