

RM1200DB-34S

HIGH POWER SWITCHING USE
INSULATED TYPE

High Voltage Diode Module

RM1200DB-34S




- IF 1200A
- VRRM 1700V
- Insulated Type
- 2-element in a Pack
- Copper Baseplate

APPLICATION

Traction drives, High Reliability Converters / Inverters, DC choppers

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

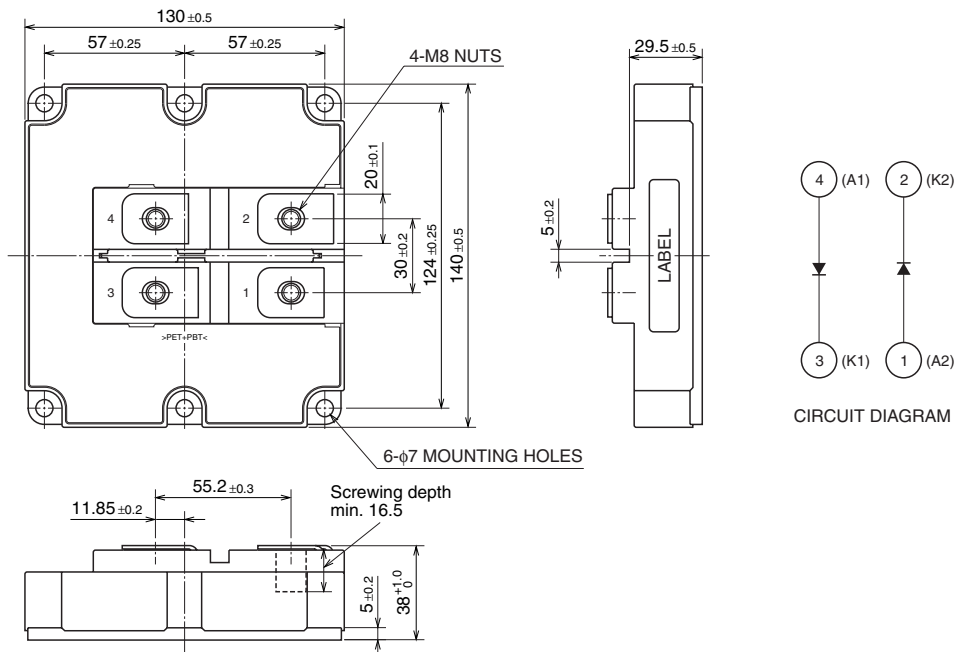

High Voltage Diode Module

May 2009

RM1200DB-34S

HIGH POWER SWITCHING USE
INSULATED TYPE

High Voltage Diode Module

MAXIMUM RATINGS

Symbol	Item	Conditions	Ratings	Unit
VRRM	Repetitive peak reverse voltage	T _j = 25 °C	1700	V
VRSM	Non-repetitive peak reverse voltage	T _j = 25 °C	1700	V
VR(DC)	Reverse DC voltage	T _j = 25 °C	1200	V
I _F	DC forward current	T _c = 25 °C	1200	A
I _{FSM}	Surge forward current	T _j = 25 °C start, t _w = 8.3 ms Half sign wave	20800	A
I ² t	Current-squared, time integration	T _j = 25 °C start, t _w = 8.3 ms Half sign wave	1803	kA ² s
V _{iso}	Isolation voltage	Charged part to the baseplate RMS sinusoidal, 60Hz 1min.	4000	V
T _j	Junction temperature	—	−40 ~ +150	°C
T _{op}	Operating temperature	—	−40 ~ +125	°C
T _{stg}	Storage temperature	—	−40 ~ +125	°C

ELECTRICAL CHARACTERISTICS

Symbol	Item	Conditions	Limits			Unit
			Min	Typ	Max	
I _{RRM}	Repetitive reverse current	V _{RM} = V _{RRM}	T _j = 25 °C	—	3	mA
			T _j = 125 °C	—	28	
V _{FM}	Forward voltage (Note 1)	I _F = 1200 A	T _j = 25 °C	2.10	—	V
			T _j = 125 °C	1.75	—	
t _{rr}	Reverse recovery time	V _R = 850 V, I _F = 1200 A di/dt = −3000 A/μs L _s =150nH, T _j = 125 °C	—	0.85	—	μs
I _{rr}	Reverse recovery current		—	800	—	A
Q _{rr}	Reverse recovery charge		—	420	—	μC
E _{rec}	Reverse recovery energy (Note 2)		—	0.3	—	J/P

Note 1. It doesn't include the voltage drop by internal lead resistance.

2. E_{rec} is the integral of 0.1V_R x 0.1I_{rr} x dt.

High Voltage Diode Module

May 2009

RM1200DB-34S

HIGH POWER SWITCHING USE
INSULATED TYPE

High Voltage Diode Module

THERMAL CHARACTERISTICS


Symbol	Item	Conditions	Limits			Unit
			Min	Typ	Max	
$R_{th(j-c)}$	Thermal resistance	Junction to case (per 1/2 module)	—	—	20.0	K/kW
$R_{th(c-f)}$	Contact thermal resistance	Case to Fin, $\lambda_{grease} = 1W/m \cdot K$ $D(c-f)=100\mu m$, (per 1/2 module)	—	24.0	—	K/kW

MECHANICAL CHARACTERISTICS


Symbol	Item	Conditions	Limits			Unit
			Min	Typ	Max	
M_t	Mounting torque	M8: Main terminals screw	7.0	—	20.0	N·m
M_s		M6: Mounting screw	3.0	—	6.0	N·m
m	Mass	—	—	1.35	—	kg
CTI	Comparative tracking index	—	600	—	—	—
D_a	Clearance	—	9.5	—	—	mm
D_s	Creepage distance	—	15	—	—	mm
LP CE	Internal inductance	—	—	30	—	nH
$R_{CC}+EE'$	Internal lead resistance	$T_c = 25^\circ C$	—	0.2	—	mΩ

PERFORMANCE CURVES

FORWARD CHARACTERISTICS
(TYPICAL)

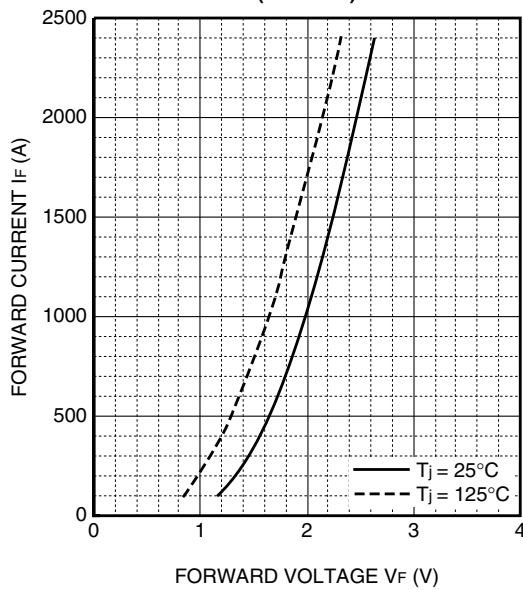

REVERSE RECOVERY ENERGY
CHARACTERISTICS
(TYPICAL)

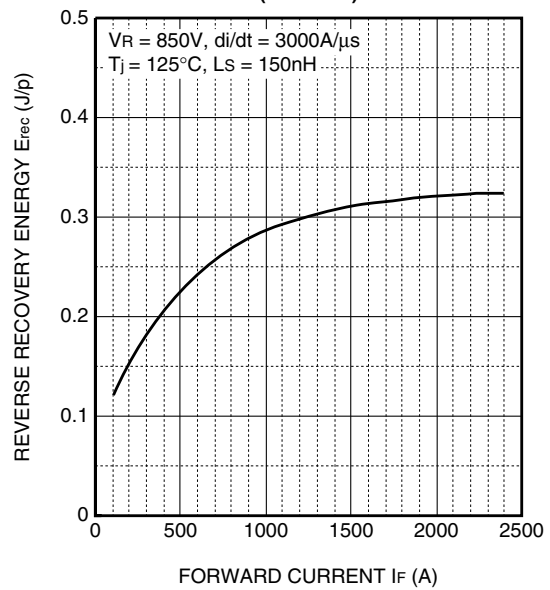


RM1200DB-34S


HIGH POWER SWITCHING USE
INSULATED TYPE

High Voltage Diode Module


REVERSE RECOVERY
CHARACTERISTICS
(TYPICAL)

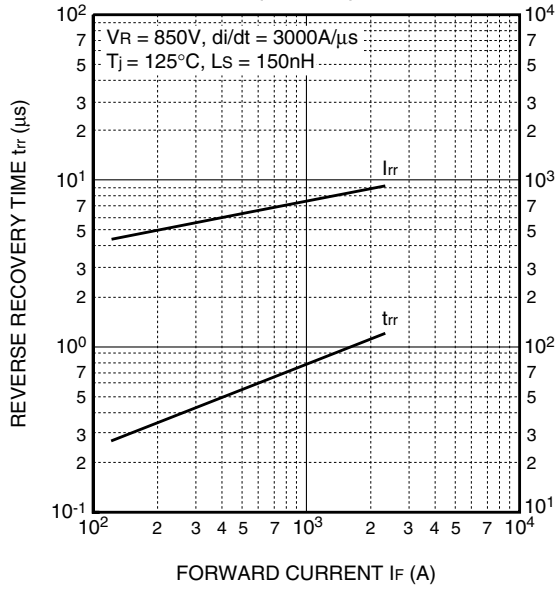

REVERSE RECOVERY
SAFE OPERATING AREA
(RRSOA)

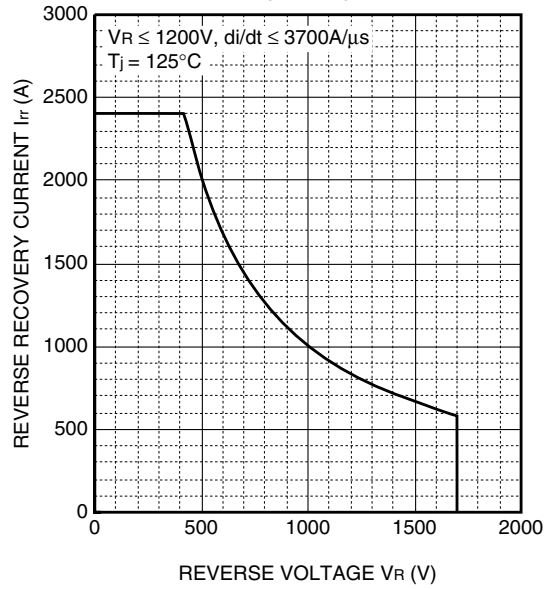

TRANSIENT THERMAL IMPEDANCE
CHARACTERISTICS

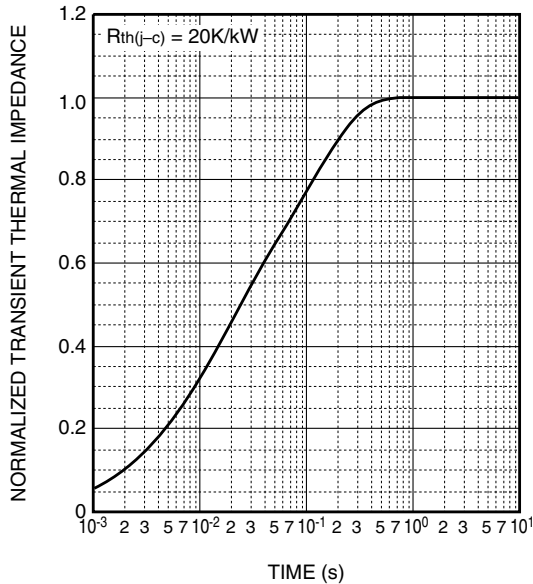

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i \left\{ 1 - \exp\left(-\frac{t}{\tau_i}\right) \right\}$$

	1	2	3	4
R_i [K/kW]	0.0059	0.0978	0.6571	0.2392
τ_i [sec]	0.0002	0.0074	0.0732	0.4488

High Voltage Diode Module