

# MC14541B

## Programmable Timer


The MC14541B programmable timer consists of a 16-stage binary counter, an integrated oscillator for use with an external capacitor and two resistors, an automatic power-on reset circuit, and output control logic.

Timing is initialized by turning on power, whereupon the power-on reset is enabled and initializes the counter, within the specified  $V_{DD}$  range. With the power already on, an external reset pulse can be applied. Upon release of the initial reset command, the oscillator will oscillate with a frequency determined by the external RC network. The 16-stage counter divides the oscillator frequency ( $f_{osc}$ ) with the  $n^{th}$  stage frequency being  $f_{osc}/2^n$ .

### Features

- Available Outputs  $2^8$ ,  $2^{10}$ ,  $2^{13}$  or  $2^{16}$
- Increments on Positive Edge Clock Transitions
- Built-in Low Power RC Oscillator ( $\pm 2\%$  accuracy over temperature range and  $\pm 20\%$  supply and  $\pm 3\%$  over processing at  $< 10$  kHz)
- Oscillator May Be Bypassed if External Clock Is Available (Apply external clock to Pin 3)
- External Master Reset Totally Independent of Automatic Reset Operation
- Operates as  $2^n$  Frequency Divider or Single Transition Timer
- $Q/\bar{Q}$  Select Provides Output Logic Level Flexibility
- Reset (auto or master) Disables Oscillator During Resetting to Provide No Active Power Dissipation
- Clock Conditioning Circuit Permits Operation with Very Slow Clock Rise and Fall Times
- Automatic Reset Initializes All Counters On Power Up
- Supply Voltage Range = 3.0 Vdc to 18 Vdc with Auto Reset Disabled (Pin 5 =  $V_{DD}$ )  
= 8.5 Vdc to 18 Vdc with Auto Reset Enabled (Pin 5 =  $V_{SS}$ )
- Pb-Free Packages are Available

### PIN ASSIGNMENT




NC = NO CONNECTION




ON Semiconductor®

<http://onsemi.com>


### MARKING DIAGRAMS





PDIP-14  
P SUFFIX  
CASE 646




SOIC-14  
D SUFFIX  
CASE 751A



SSOP-14  
DT SUFFIX  
CASE 948G



SOEIAJ-14  
F SUFFIX  
CASE 965



A = Assembly Location  
WL, L = Wafer Lot  
YY, Y = Year  
WW, W = Work Week  
G or ■ = Pb-Free Package  
(Note: Microdot may be in either location)

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

# MC14541B

## MAXIMUM RATINGS (Voltages Referenced to $V_{SS}$ )

| Symbol            | Parameter  | Value                  | Unit |
|-------------------|--|------------------------|------|
| $V_{DD}$          | DC Supply Voltage Range                          | -0.5 to +18.0          | V    |
| $V_{in}, V_{out}$ | Input or Output Voltage Range, (DC or Transient) | -0.5 to $V_{DD} + 0.5$ | V    |
| $I_{in}$          | Input Current (DC or Transient)                  | $\pm 10$ (per Pin)     | mA   |
| $I_{out}$         | Output Current (DC or Transient)                 | $\pm 45$ (per Pin)     | mA   |
| $P_D$             | Power Dissipation, per Package (Note 1)          | 500                    | mW   |
| $T_A$             | Ambient Temperature Range                        | -55 to +125            | °C   |
| $T_{stg}$         | Storage Temperature Range                        | -65 to +150            | °C   |
| $T_L$             | Lead Temperature, (8-Second Soldering)           | 260                    | °C   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

### 1. Temperature Derating:

Plastic "P and D/DW" Packages: - 7.0 mW/°C From 65°C To 125°C

## ORDERING INFORMATION

| Device        | Package                | Shipping <sup>†</sup> |
|---------------|------------------------|-----------------------|
| MC14541BCP    | PDIP-14                | 25 Units / Rail       |
| MC14541BCPG   | PDIP-14<br>(Pb-Free)   |                       |
| MC14541BD     | SOIC-14                | 55 Units / Rail       |
| MC14541BDG    | SOIC-14<br>(Pb-Free)   |                       |
| MC14541BDR2   | SOIC-14                | 2500 / Tape & Reel    |
| MC14541BDR2G  | SOIC-14<br>(Pb-Free)   |                       |
| MC14541BDTR2  | TSSOP-14*              |                       |
| MC14541BDTR2G | TSSOP-14*              |                       |
| MC14541BF     | SOEIAJ-14              | 50 Units / Rail       |
| MC14541BFG    | SOEIAJ-14<br>(Pb-Free) |                       |
| MC14541BFEL   | SOEIAJ-14              | 2000 / Tape & Reel    |
| MC14541BFELG  | SOEIAJ-14<br>(Pb-Free) |                       |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*This package is inherently Pb-Free.

# MC14541B

## ELECTRICAL CHARACTERISTICS (Voltages Referenced to V<sub>SS</sub>)

| Characteristic  | Symbol  | V <sub>DD</sub><br>Vdc | - 55°C  |       | 25°C  |                 |       | 125°C |       | Unit |
|---|---|------------------------|---|-------|-------|-----------------|-------|-------|-------|------|
|   |   |                        | Min   | Max   | Min   | Typ<br>(Note 2) | Max   | Min   | Max   |      |
| Output Voltage<br>V <sub>in</sub> = V <sub>DD</sub> or 0<br><br>V <sub>in</sub> = 0 or V <sub>DD</sub>  | "0" Level<br>V <sub>OL</sub>                      | 5.0                    | -   | 0.05  | -     | 0               | 0.05  | -     | 0.05  | Vdc  |
|   |   | 10                     | -   | 0.05  | -     | 0               | 0.05  | -     | 0.05  |      |
|   |   | 15                     | -   | 0.05  | -     | 0               | 0.05  | -     | 0.05  |      |
|   | "1" Level<br>V <sub>OH</sub>                      | 5.0                    | 4.95  | -     | 4.95  | 5.0             | -     | 4.95  | -     | Vdc  |
|   |   | 10                     | 9.95  | -     | 9.95  | 10              | -     | 9.95  | -     |      |
|   |   | 15                     | 14.95   | -     | 14.95 | 15              | -     | 14.95 | -     |      |
| Input Voltage<br>"0" Level<br>(V <sub>O</sub> = 4.5 or 0.5 Vdc)<br>(V <sub>O</sub> = 9.0 or 1.0 Vdc)<br>(V <sub>O</sub> = 13.5 or 1.5 Vdc)<br><br>"1" Level<br>(V <sub>O</sub> = 0.5 or 4.5 Vdc)<br>(V <sub>O</sub> = 1.0 or 9.0 Vdc)<br>(V <sub>O</sub> = 1.5 or 13.5 Vdc) | V <sub>IL</sub>                                   | 5.0                    | -   | 1.5   | -     | 2.25            | 1.5   | -     | 1.5   | Vdc  |
|   |   | 10                     | -   | 3.0   | -     | 4.50            | 3.0   | -     | 3.0   |      |
|   |   | 15                     | -   | 4.0   | -     | 6.75            | 4.0   | -     | 4.0   |      |
|   | V <sub>IH</sub>                                   | 5.0                    | 3.5   | -     | 3.5   | 2.75            | -     | 3.5   | -     | Vdc  |
|   |   | 10                     | 7.0   | -     | 7.0   | 5.50            | -     | 7.0   | -     |      |
|   |   | 15                     | 11  | -     | 11    | 8.25            | -     | 11    | -     |      |
| Output Drive Current<br>(V <sub>OH</sub> = 2.5 Vdc)<br>(V <sub>OH</sub> = 9.5 Vdc)<br>(V <sub>OH</sub> = 13.5 Vdc)<br><br>(V <sub>OL</sub> = 0.4 Vdc)<br>(V <sub>OL</sub> = 0.5 Vdc)<br>(V <sub>OL</sub> = 1.5 Vdc)   | Source<br>I <sub>OH</sub>                         | 5.0                    | -7.96   | -     | -6.42 | -12.83          | -     | -4.49 | -     | mAdc |
|   |   | 10                     | -4.19   | -     | -3.38 | -6.75           | -     | -2.37 | -     |      |
|   |   | 15                     | -16.3   | -     | -13.2 | -26.33          | -     | -9.24 | -     |      |
|   | Sink<br>I <sub>OL</sub>                           | 5.0                    | 1.93  | -     | 1.56  | 3.12            | -     | 1.09  | -     | mAdc |
|   |   | 10                     | 4.96  | -     | 4.0   | 8.0             | -     | 2.8   | -     |      |
|   |   | 15                     | 19.3  | -     | 15.6  | 31.2            | -     | 10.9  | -     |      |
| Input Current   | I <sub>in</sub>                                   | 15                     | -   | ± 0.1 | -     | ± 0.00001       | ± 0.1 | -     | ± 1.0 | μAdc |
| Input Capacitance<br>(V <sub>in</sub> = 0)  | C <sub>in</sub>                                   | -                      | -   | -     | -     | 5.0             | 7.5   | -     | -     | pF   |
| Quiescent Current<br>(Pin 5 is High)<br>Auto Reset Disabled   | I <sub>DD</sub>                                   | 5.0                    | -   | 5.0   | -     | 0.005           | 5.0   | -     | 150   | μAdc |
|   |   | 10                     | -   | 10    | -     | 0.010           | 10    | -     | 300   |      |
|   |   | 15                     | -   | 20    | -     | 0.015           | 20    | -     | 600   |      |
| Auto Reset Quiescent Current<br>(Pin 5 is low)  | I <sub>DDR</sub>                                  | 10                     | -   | 250   | -     | 30              | 250   | -     | 1500  | μAdc |
|   |   | 15                     | -   | 500   | -     | 82              | 500   | -     | 2000  |      |
| Supply Current (Notes 3 & 4)<br>(Dynamic plus Quiescent)  | I <sub>D</sub>                                    | 5.0                    | I <sub>D</sub> = (0.4 μA/kHz) f + I <sub>DD</sub> |       |       |                 |       |       |       | μAdc |
| 10  | I <sub>D</sub> = (0.8 μA/kHz) f + I <sub>DD</sub> |                        |   |       |       |                 |       |       |       |      |
| 15  | I <sub>D</sub> = (1.2 μA/kHz) f + I <sub>DD</sub> |                        |   |       |       |                 |       |       |       |      |

2. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

3. The formulas given are for the typical characteristics only at 25°C.

4. When using the on chip oscillator the total supply current (in μAdc) becomes: I<sub>T</sub> = I<sub>D</sub> + 2 C<sub>tc</sub> V<sub>DD</sub> f × 10<sup>-3</sup> where I<sub>D</sub> is in μA, C<sub>tc</sub> is in pF, V<sub>DD</sub> in Volts DC, and f in kHz. (see Fig. 3) Dissipation during power-on with automatic reset enabled is typically 50 μA @ V<sub>DD</sub> = 10 Vdc.

# MC14541B


## SWITCHING CHARACTERISTICS (Note 5) ( $C_L = 50 \text{ pF}$ , $T_A = 25^\circ\text{C}$ )

| Characteristic  | Symbol             | $V_{DD}$        | Min               | Typ (Note 6)       | Max                | Unit          |
|---|--------------------|-----------------|-------------------|--------------------|--------------------|---------------|
| Output Rise and Fall Time<br>$t_{TLH}, t_{THL} = (1.5 \text{ ns/pF}) C_L + 25 \text{ ns}$<br>$t_{TLH}, t_{THL} = (0.75 \text{ ns/pF}) C_L + 12.5 \text{ ns}$<br>$t_{TLH}, t_{THL} = (0.55 \text{ ns/pF}) C_L + 9.5 \text{ ns}$                          | $t_{TLH}, t_{THL}$ | 5.0<br>10<br>15 | -<br>-<br>-       | 100<br>50<br>40    | 200<br>100<br>80   | ns            |
| Propagation Delay, Clock to Q ( $2^8$ Output)<br>$t_{PLH}, t_{PHL} = (1.7 \text{ ns/pF}) C_L + 3415 \text{ ns}$<br>$t_{PLH}, t_{PHL} = (0.66 \text{ ns/pF}) C_L + 1217 \text{ ns}$<br>$t_{PLH}, t_{PHL} = (0.5 \text{ ns/pF}) C_L + 875 \text{ ns}$     | $t_{PLH}, t_{PHL}$ | 5.0<br>10<br>15 | -<br>-<br>-       | 3.5<br>1.25<br>0.9 | 10.5<br>3.8<br>2.9 | $\mu\text{s}$ |
| Propagation Delay, Clock to Q ( $2^{16}$ Output)<br>$t_{PHL}, t_{PLH} = (1.7 \text{ ns/pF}) C_L + 5915 \text{ ns}$<br>$t_{PHL}, t_{PLH} = (0.66 \text{ ns/pF}) C_L + 3467 \text{ ns}$<br>$t_{PHL}, t_{PLH} = (0.5 \text{ ns/pF}) C_L + 2475 \text{ ns}$ | $t_{PHL}, t_{PLH}$ | 5.0<br>10<br>15 | -<br>-<br>-       | 6.0<br>3.5<br>2.5  | 18<br>10<br>7.5    | $\mu\text{s}$ |
| Clock Pulse Width   | $t_{WH(cl)}$       | 5.0<br>10<br>15 | 900<br>300<br>225 | 300<br>100<br>85   | -<br>-<br>-        | ns            |
| Clock Pulse Frequency (50% Duty Cycle)  | $f_{cl}$           | 5.0<br>10<br>15 | -<br>-<br>-       | 1.5<br>4.0<br>6.0  | 0.75<br>2.0<br>3.0 | MHz           |
| MR Pulse Width  | $t_{WH(R)}$        | 5.0<br>10<br>15 | 900<br>300<br>225 | 300<br>100<br>85   | -<br>-<br>-        | ns            |
| Master Reset Removal Time   | $t_{rem}$          | 5.0<br>10<br>15 | 420<br>200<br>200 | 210<br>100<br>100  | -<br>-<br>-        | ns            |

5. The formulas given are for the typical characteristics only at  $25^\circ\text{C}$ .

6. Data labelled "Typ" is not to be used for design purposes, but is intended as an indication of the IC's potential performance.

[www.BDTIC.com/ON](http://www.BDTIC.com/ON)

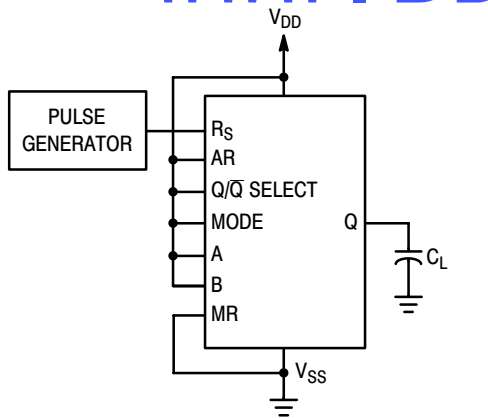

( $R_{ic}$  AND  $C_{ic}$  OUTPUTS ARE LEFT OPEN)

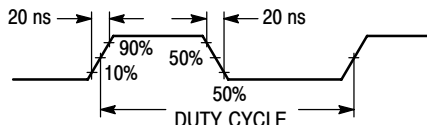


Figure 1. Power Dissipation Test Circuit and Waveform



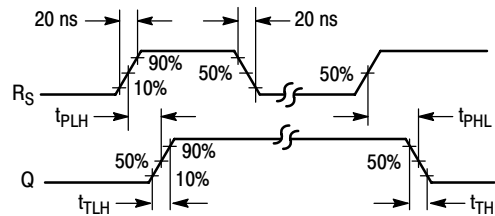


Figure 2. Switching Time Test Circuit and Waveforms

# MC14541B

## EXPANDED BLOCK DIAGRAM

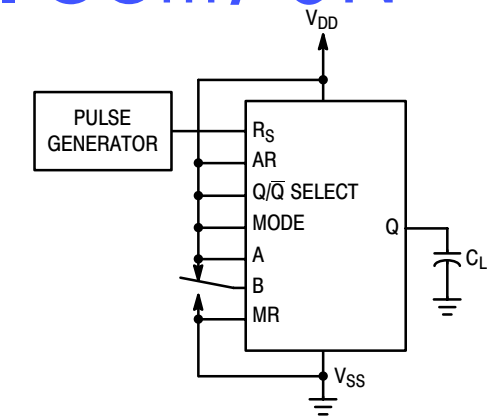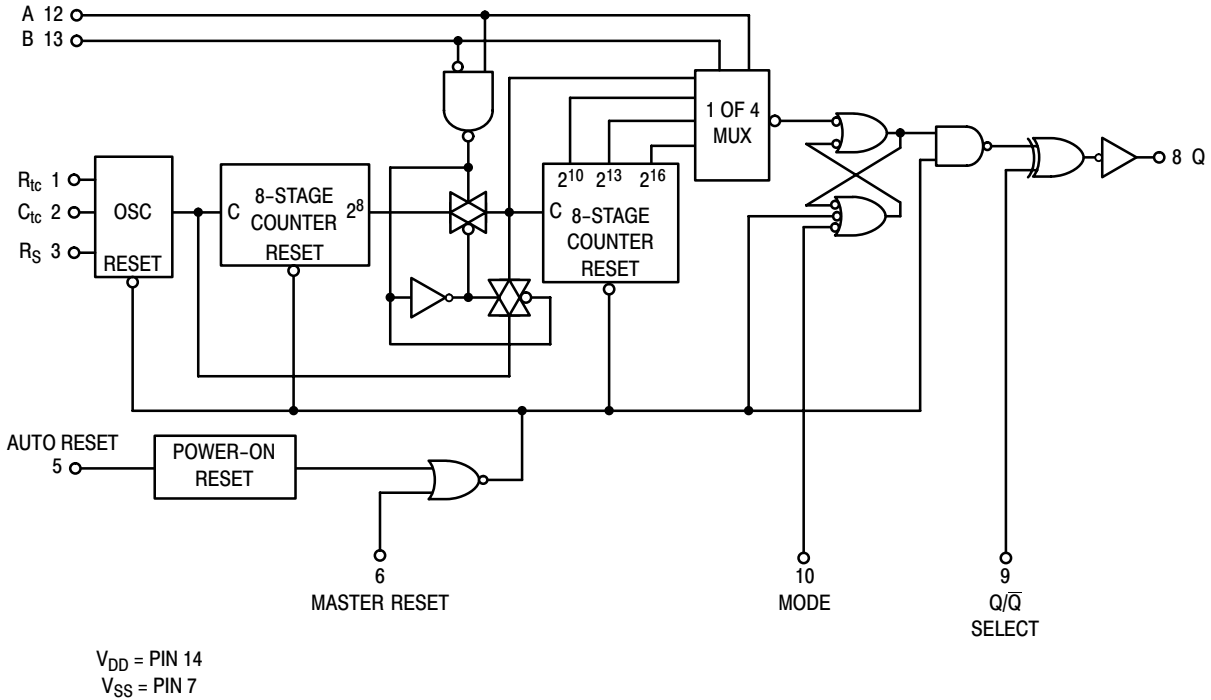


**FREQUENCY SELECTION TABLE**

| A | B | Number of Counter Stages n | Count $2^n$ |
|---|---|----------------------------|-------------|
| 0 | 0 | 13                         | 8192        |
| 0 | 1 | 10                         | 1024        |
| 1 | 0 | 8                          | 256         |
| 1 | 1 | 16                         | 65536       |

**TRUTH TABLE**

| Pin             | 0                                | 1                                 |
|-----------------|----------------------------------|-----------------------------------|
| Auto Reset, 5   | Auto Reset Operating             | Auto Reset Disabled               |
| Master Reset, 6 | Timer Operational                | Master Reset On                   |
| $Q/\bar{Q}$ , 9 | Output Initially Low After Reset | Output Initially High After Reset |
| Mode, 10        | Single Cycle Mode                | Recycle Mode                      |

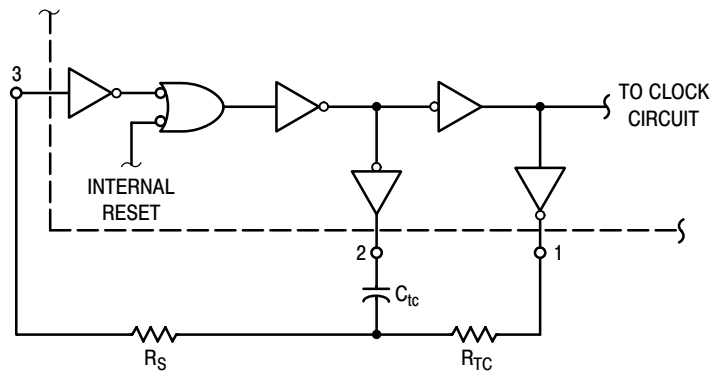

**Figure 3. Oscillator Circuit Using RC Configuration**

TYPICAL RC OSCILLATOR CHARACTERISTICS

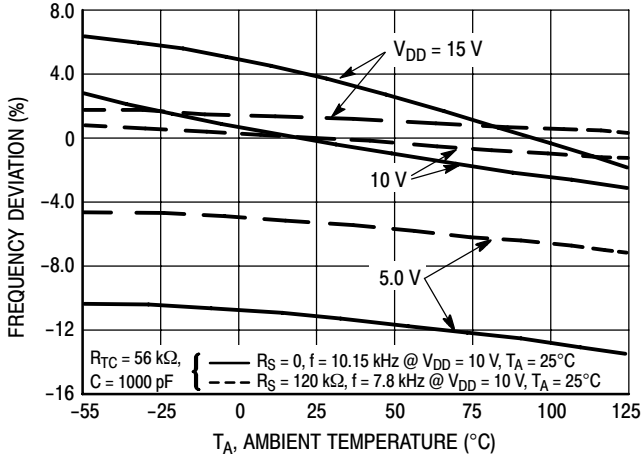


Figure 4. RC Oscillator Stability

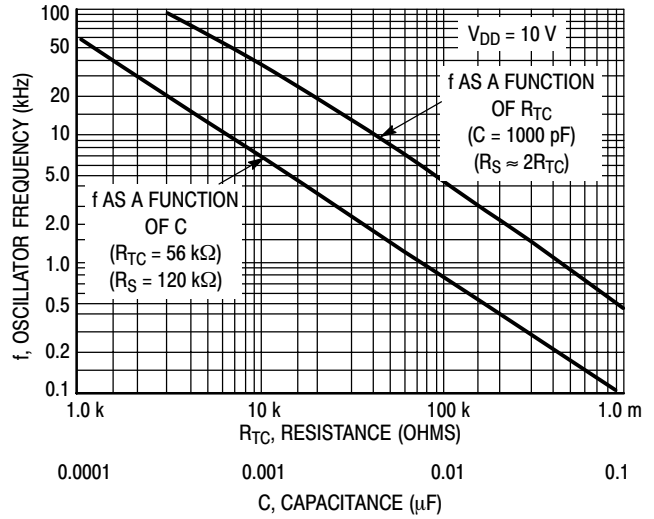


Figure 5. RC Oscillator Frequency as a Function of  $R_{tc}$  and  $C_{tc}$

OPERATING CHARACTERISTICS

With Auto Reset pin set to a “0” the counter circuit is initialized by turning on power. Or with power already on, the counter circuit is reset when the Master Reset pin is set to a “1”. Both types of reset will result in synchronously resetting all counter stages independent of counter state. Auto Reset pin when set to a “1” provides a low power operation.

The RC oscillator as shown in Figure 3 will oscillate with a frequency determined by the external RC network i.e.,

$$f = \frac{1}{2.3 R_{tc} C_{tc}} \quad \text{if } (1 \text{ kHz} \leq f \leq 100 \text{ kHz})$$

and  $R_S \approx 2 R_{tc}$  where  $R_S \geq 10 \text{ k}\Omega$


The time select inputs (A and B) provide a two-bit address to output any one of four counter stages ( $2^8$ ,  $2^{10}$ ,  $2^{13}$  and  $2^{16}$ ). The  $2^n$  counts as shown in the Frequency Selection Table represents the Q output of the  $N^{\text{th}}$  stage of the counter. When A is “1”,  $2^{16}$  is selected for both states of B. However,

when B is “0”, normal counting is interrupted and the 9th counter stage receives its clock directly from the oscillator (i.e., effectively outputting  $2^8$ ).

The Q/Q select output control pin provides for a choice of output level. When the counter is in a reset condition and Q/Q select pin is set to a “0” the Q output is a “0”, correspondingly when Q/Q select pin is set to a “1” the Q output is a “1”.

When the mode control pin is set to a “1”, the selected count is continually transmitted to the output. But, with mode pin “0” and after a reset condition the  $R_S$  flip-flop (see Expanded Block Diagram) resets, counting commences, and after  $2^{n-1}$  counts the  $R_S$  flip-flop sets which causes the output to change state. Hence, after another  $2^{n-1}$  counts the output will not change. Thus, a Master Reset pulse must be applied or a change in the mode pin level is required to reset the single cycle operation.

DIGITAL TIMER APPLICATION

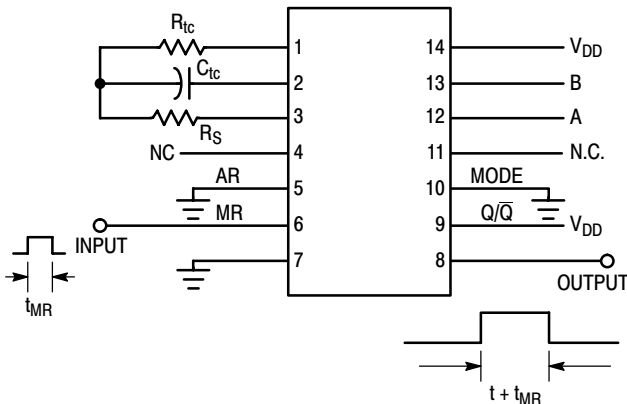

When Master Reset (MR) receives a positive pulse, the internal counters and latch are reset. The Q output goes high and remains high until the selected (via A and B) number of clock pulses are counted, the Q output then goes low and remains low until another input pulse is received.


This “one shot” is fully retriggerable and as accurate as the input frequency. An external clock can be used (pin 3 is the clock input, pins 1 and 2 are outputs) if additional accuracy is needed.

Notice that a setup time equal to the desired pulse width output is required immediately following initial power up, during which time Q output will be high.

# MC14541B

## PACKAGE DIMENSIONS

**PDIP-14**  
CASE 646-06  
ISSUE P

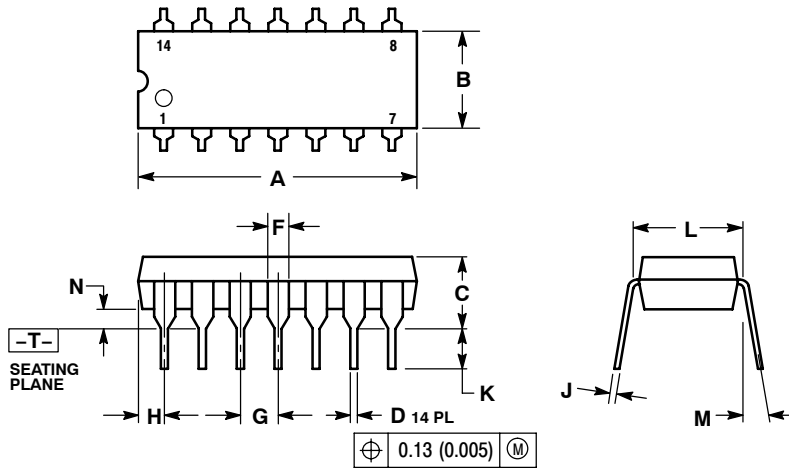

**NOTES:**


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.715     | 0.770 | 18.16       | 19.56 |
| B   | 0.240     | 0.260 | 6.10        | 6.60  |
| C   | 0.145     | 0.185 | 3.69        | 4.69  |
| D   | 0.015     | 0.021 | 0.38        | 0.53  |
| F   | 0.040     | 0.070 | 1.02        | 1.78  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.052     | 0.095 | 1.32        | 2.41  |
| J   | 0.008     | 0.015 | 0.20        | 0.38  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.290     | 0.310 | 7.37        | 7.87  |
| M   | ---       | 10°   | ---         | 10°   |
| N   | 0.015     | 0.039 | 0.38        | 1.01  |

[www.BDTIC.com/ON](http://www.BDTIC.com/ON)

# MC14541B

SOIC-14  
CASE 751A-03  
ISSUE H

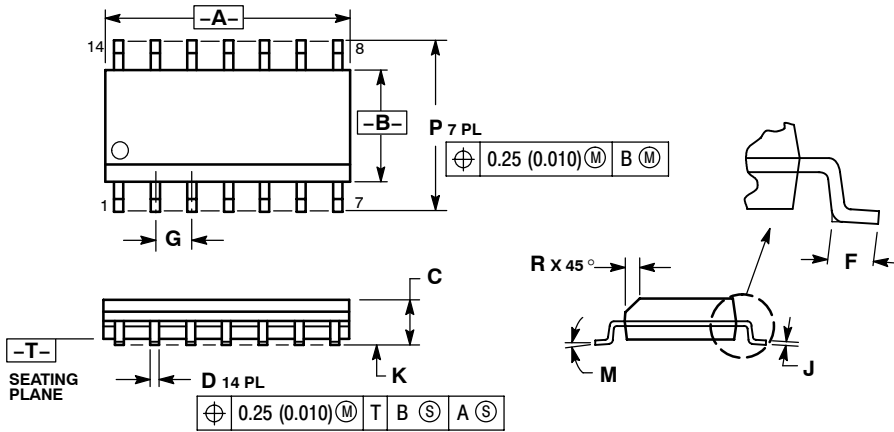


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 8.55        | 8.75 | 0.337     | 0.344 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.054     | 0.068 |
| D   | 0.35        | 0.49 | 0.014     | 0.019 |
| F   | 0.40        | 1.25 | 0.016     | 0.049 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| J   | 0.19        | 0.25 | 0.008     | 0.009 |
| K   | 0.10        | 0.25 | 0.004     | 0.009 |
| M   | 0°          | 7°   | 0°        | 7°    |
| P   | 5.80        | 6.20 | 0.228     | 0.244 |
| R   | 0.25        | 0.50 | 0.010     | 0.019 |

**SOLDERING FOOTPRINT\***

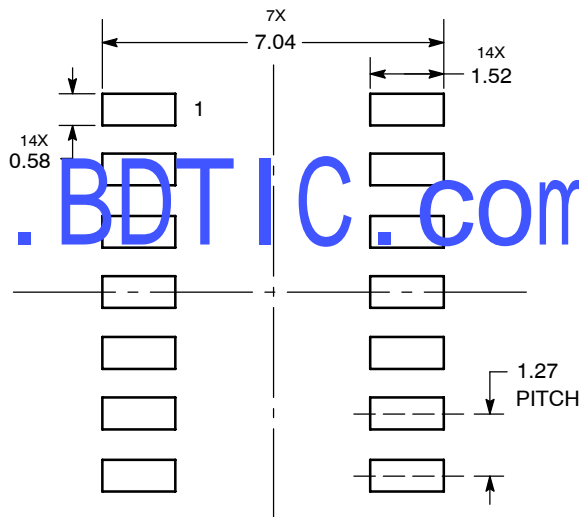


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



# MC14541B

## PACKAGE DIMENSIONS


TSSOP-14  
CASE 948G-01  
ISSUE B

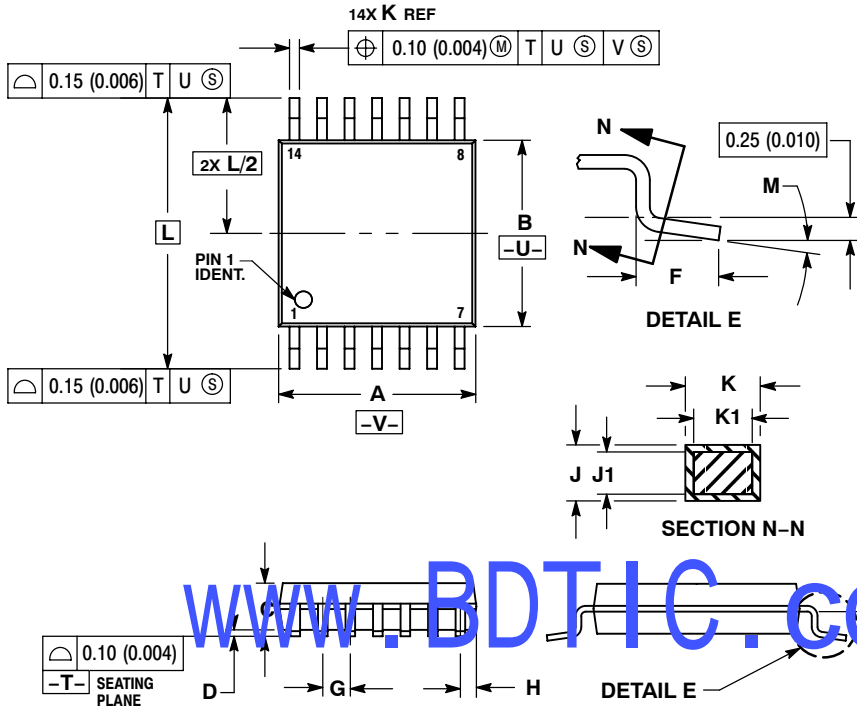

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
  5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
  6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES |       |
|-----|-------------|------|--------|-------|
|     | MIN         | MAX  | MIN    | MAX   |
| A   | 4.90        | 5.10 | 0.193  | 0.200 |
| B   | 4.30        | 4.50 | 0.169  | 0.177 |
| C   | ---         | 1.20 | ---    | 0.047 |
| D   | 0.05        | 0.15 | 0.002  | 0.006 |
| F   | 0.50        | 0.75 | 0.020  | 0.030 |
| G   | 0.05        | BSC  | 0.026  | BSC   |
| H   | 0.00        | 0.02 | 0.020  | 0.024 |
| J   | 0.09        | 0.20 | 0.004  | 0.008 |
| J1  | 0.09        | 0.15 | 0.004  | 0.006 |
| K   | 0.19        | 0.30 | 0.007  | 0.012 |
| K1  | 0.19        | 0.25 | 0.007  | 0.010 |
| L   | 6.40        | BSC  | 0.252  | BSC   |
| M   | 0°          | 8°   | 0°     | 8°    |

### SOLDERING FOOTPRINT\*

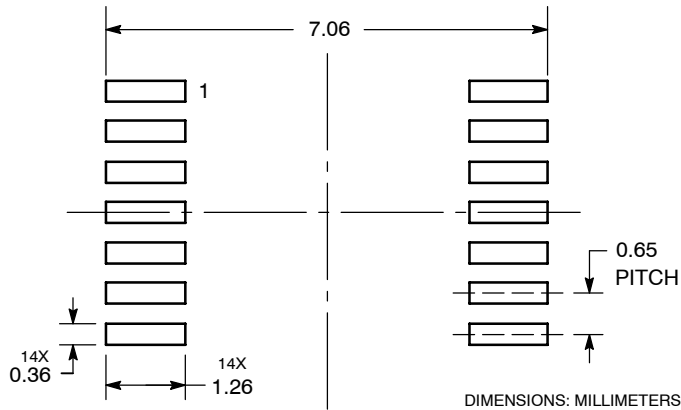


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MC14541B

## PACKAGE DIMENSIONS

SOEIAJ-14  
CASE 965-01  
ISSUE A

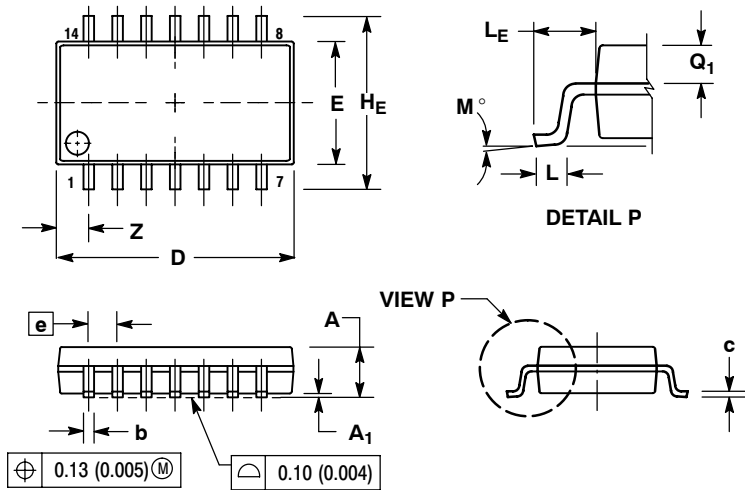

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
5. THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

| DIM            | MILLIMETERS |       | INCHES    |       |
|----------------|-------------|-------|-----------|-------|
|                | MIN         | MAX   | MIN       | MAX   |
| A              | ---         | 2.05  | ---       | 0.081 |
| A <sub>1</sub> | 0.05        | 0.20  | 0.002     | 0.008 |
| b              | 0.35        | 0.50  | 0.014     | 0.020 |
| c              | 0.10        | 0.20  | 0.004     | 0.008 |
| D              | 9.90        | 10.50 | 0.390     | 0.413 |
| E              | 5.10        | 5.45  | 0.201     | 0.215 |
| e              | 1.27 BSC    |       | 0.050 BSC |       |
| H <sub>E</sub> | 7.40        | 8.20  | 0.291     | 0.323 |
| 0.50           | 0.50        | 0.85  | 0.020     | 0.033 |
| L <sub>E</sub> | 1.10        | 1.50  | 0.043     | 0.059 |
| M              | 0°          | 10°   | 0°        | 10°   |
| Q <sub>1</sub> | 0°          | 0°    | 0.028     | 0.035 |
| Z              | ---         | 1.2   | ---       | 0.056 |

[www.BDTIC.com/ON](http://www.BDTIC.com/ON)

ON Semiconductor and ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

[www.BDTIC.com/ON/](http://www.BDTIC.com/ON/)

MC14541B/D