

NSL12AW

High Current Surface Mount PNP Silicon Low $V_{CE(sat)}$ Transistor for Battery Operated Applications

Features

- High Current Capability (3 A)
- High Power Handling (Up to 650 mW)
- Low $V_{CE(s)}$ (170 mV Typical @ 1 A)
- Small Size
- Pb-Free Package is Available

Benefits

- High Specific Current and Power Capability Reduces Required PCB Area
- Reduced Parasitic Losses Increases Battery Life

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

Rating	Symbol	Max	Unit
Collector-Emitter Voltage	V_{CEO}	-12	Vdc
Collector-Base Voltage	V_{CBO}	-12	Vdc
Emitter-Base Voltage	V_{EBO}	-5.0	Vdc
Collector Current – Continuous	I_C	-2.0	Adc
Collector Current – Peak	$I_{C,PK}$	-3.0	Adc
Electrostatic Discharge	ESD	HBM Class 3 MM Class C	

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D (Note 1)	450 3.6	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$ (Note 1)	275	$^\circ\text{C}/\text{W}$
Total Device Dissipation $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D (Note 2)	650 5.2	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$ (Note 2)	192	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Lead 6	$R_{\theta JL}$	105	$^\circ\text{C}/\text{W}$
Total Device Dissipation (Single Pulse < 10 sec.)	P_D Single	1.4	W
Junction and Storage Temperature Range	T_J, T_{stg}	-55 to +150	$^\circ\text{C}$



1. FR-4, Minimum Pad, 1 oz Coverage
2. FR-4, 1" Pad, 1 oz Coverage



ON Semiconductor®

<http://onsemi.com>


12 VOLTS
3.0 AMPS
PNP TRANSISTOR



CASE 419B
SC-88/SOT-363
STYLE 20

www.BDTIC.com/ON

MARKING DIAGRAM



M = Date Code
■ = Pb-Free Package

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

NSL12AW

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage, (I _C = –10 mAdc, I _B = 0)	V _{(BR)CEO}	–12	–15	–	Vdc
Collector–Base Breakdown Voltage, (I _C = –0.1 mAdc, I _E = 0)	V _{(BR)CBO}	–12	–25	–	Vdc
Emitter–Base Breakdown Voltage, (I _E = –0.1 mAdc, I _C = 0)	V _{(BR)EBO}	–5.0	–7.0	–	Vdc
Collector Cutoff Current, (V _{CB} = –12 Vdc, I _E = 0)	I _{CBO}	–	–0.02	–0.1	μAdc
Collector–Emitter Cutoff Current, (V _{CE} = –12 Vdc, I _E = 0)	I _{CES}	–	–0.03	–0.1	μAdc
Emitter Cutoff Current, (V _{CE} = –5.0 Vdc, I _E = 0)	I _{EBO}	–	–0.03	–0.1	μAdc

ON CHARACTERISTICS

DC Current Gain (Note 3) (I _C = –0.5 A, V _{CE} = –1.5 V) (I _C = –0.8 A, V _{CE} = –1.5 V) (I _C = –1.0 A, V _{CE} = –1.5 V)	h _{FE}	100 100 100	180 165 160	– 300 –	
Collector–Emitter Saturation Voltage (Note 3) (I _C = –0.5 A, I _B = –10 mA) (I _C = –0.8 A, I _B = –16 mA) (I _C = –1.0 A, I _B = –20 mA)	V _{CE(sat)}	– – –	–0.10 –0.14 –0.17	–0.160 –0.235 –0.290	V
Base–Emitter Saturation Voltage (Note 3) (I _C = –1.0 A, I _B = –20 mA)	V _{BE(sat)}	–	–0.84	–0.95	V
Base–Emitter Turn–on Voltage (Note 3) (I _C = –1.0 A, V _{CE} = –1.5 V)	V _{BE(on)}	–	–0.81	–0.95	V
Cutoff Frequency (I _C = –100 mA, V _{CE} = –5.0 V, f = 100 MHz)	f _T	–	100	–	MHz
Output Capacitance (V _{CB} = –1.5 V, f = 1.0 MHz)	C _{obo}		50	65	pF

3. Pulsed Condition: Pulse Width < 300 μsec, Duty Cycle < 2%

www.BDTIC.com/ON

ORDERING INFORMATION

Device	Package	Shipping†
NSL12AWT1	SOT–363	3000 Tape & Reel
NSL12AWT1G	SOT–363 (Pb–Free)	3000 Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

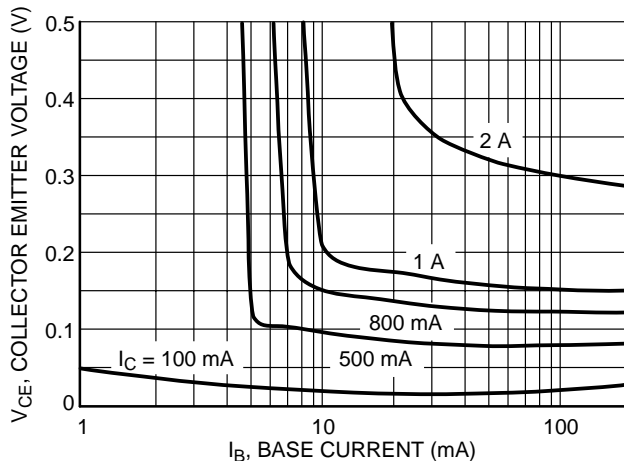


Figure 1. Collector Emitter Voltage vs Base Current

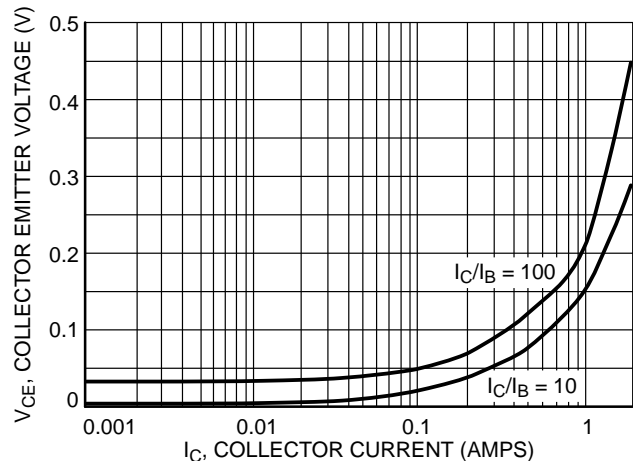


Figure 2. Collector Emitter Voltage vs Collector Current

NSL12AW

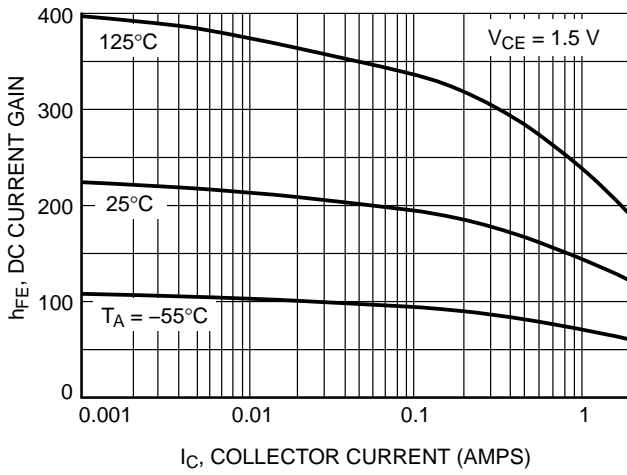


Figure 3. DC Current Gain versus Collector Current

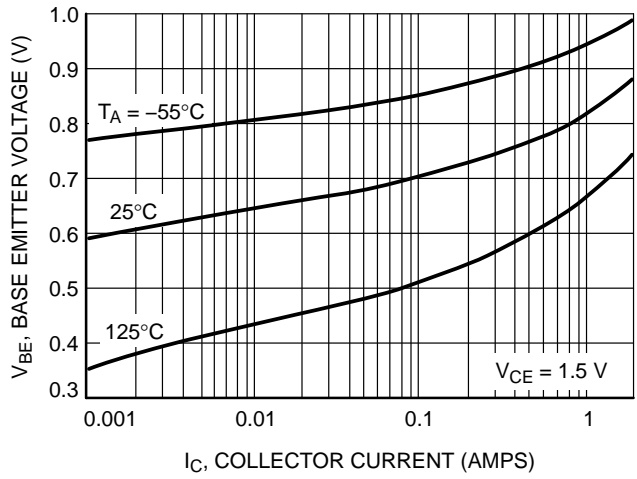


Figure 4. Base Emitter Voltage versus Collector Current

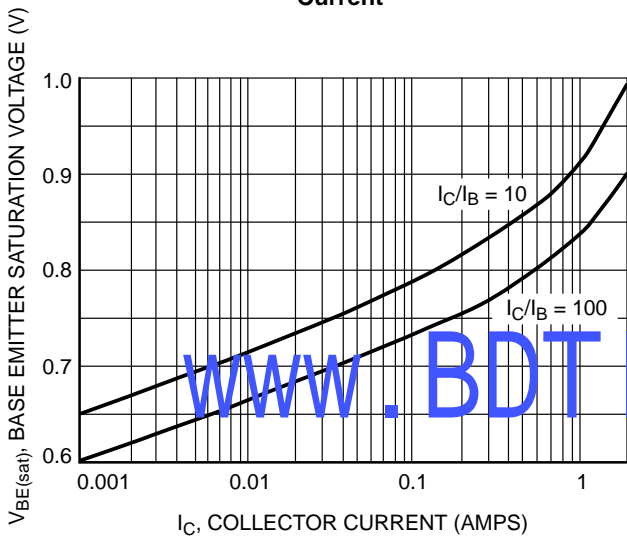


Figure 5. Base Emitter Saturation Voltage versus Base Current

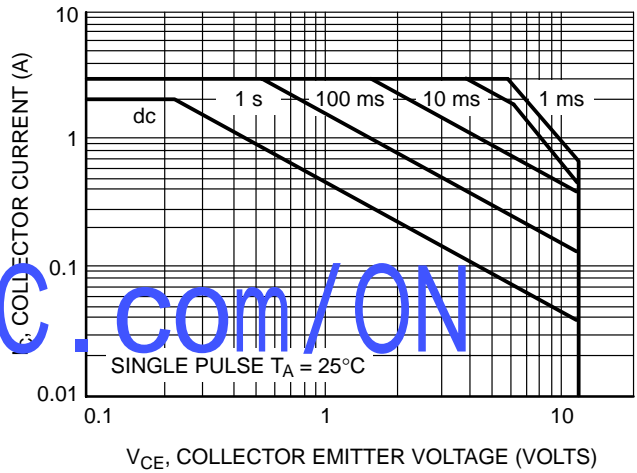


Figure 6. Safe Operating Area


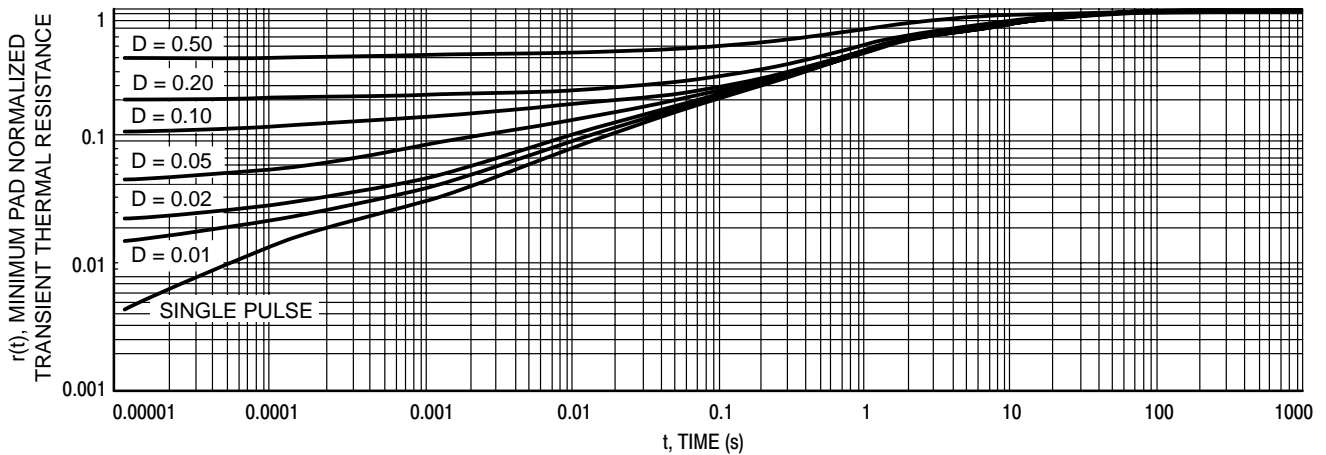


Figure 7. Normalized Thermal Response

NSL12AW

PACKAGE DIMENSIONS

SC-88/SC70-6/SOT-363
CASE 419B-02
ISSUE V

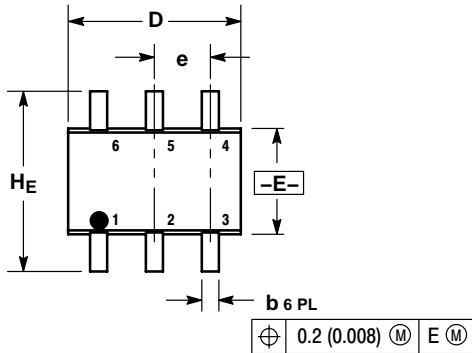


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 419B-01 OBSOLETE, NEW STANDARD 419B-02.


DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.95	1.10	0.031	0.037	0.043
A1	0.00	0.05	0.10	0.000	0.002	0.004
A3	0.20 REF			0.008 REF		
b	0.10	0.21	0.30	0.004	0.008	0.012
C	0.10	0.14	0.25	0.004	0.005	0.010
D	1.80	2.00	2.20	0.070	0.078	0.086
E	1.15	1.25	1.35	0.045	0.049	0.053
e	0.65 BSC			0.026 BSC		
L	0.10	0.20	0.30	0.004	0.008	0.012
HE	2.00	2.10	2.20	0.078	0.082	0.086

STYLE 20:

- PIN 1. COLLECTOR
- COLLECTOR
- BASE
- EMITTER
- COLLECTOR
- COLLECTOR

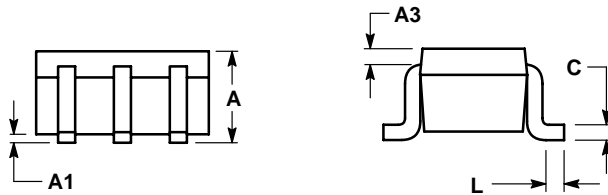

SOLDERING FOOTPRINT*

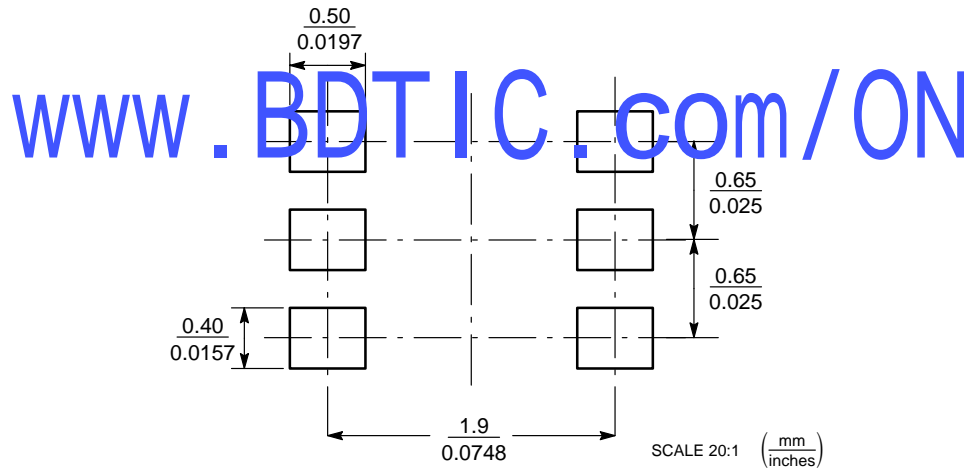

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA
Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada
Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.