


Features

- Typical Insertion Loss Less than 0.2dB
- -70dBc IMD Minimum
- Isolation Greater than 23dB
- 200W Foward and Reverse Power Rating
- Industry Standard 0.75in x 0.75in Drop-in Package

Applications

- Wireless Infrastructure Systems: AWS band (3G, 4G), LTE.

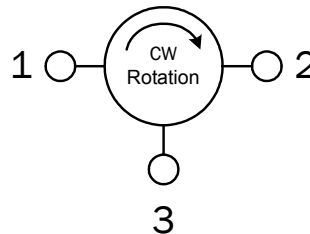

Functional Block Diagram

Product Description

The RFCR2711 is a small profile, low cost drop-in circulator designed for various wireless applications. The circulator features a robust construction for high reliability, low insertion loss, excellent IMD (Inter-Modulation Distortion) performance, and magnetically shield. The circulator is RoHS compliant.

The RFCR2711 circulator is CW (Clockwise) rotation.

Ordering Information

RFCR2711 2110MHz to 2170MHz Single Junction Drop-In Circulator
 RFCR2711PCBA-41X Fully Assembled Evaluation Board

Optimum Technology Matching® Applied


- | | | | |
|--------------------------------------|--------------------------------------|-------------------------------------|------------------------------------|
| <input type="checkbox"/> GaAs HBT | <input type="checkbox"/> SiGe BiCMOS | <input type="checkbox"/> GaAs pHEMT | <input type="checkbox"/> GaN HEMT |
| <input type="checkbox"/> GaAs MESFET | <input type="checkbox"/> Si BiCMOS | <input type="checkbox"/> Si CMOS | <input type="checkbox"/> BIFET HBT |
| <input type="checkbox"/> InGaP HBT | <input type="checkbox"/> SiGe HBT | <input type="checkbox"/> Si BJT | <input type="checkbox"/> LDMOS |

Absolute Maximum Ratings

Parameter	Rating	Unit
Forward Power (Peak/Average)	1000/200	W
Reverse Power	200	W
Operating Temperature	-40 to +85	°C
Storage Temperature	-40 to +95	°C

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Overall					
Frequency Range	2110		2170	MHz	
Insertion Loss		<0.20	0.30	dB	
Isolation	21	>23		dB	
Return Loss	21	>23		dB	
IMD	>70			dBc	2Tx37.0Watts


Note: Typical values represent Mid-band performance at 25 °C

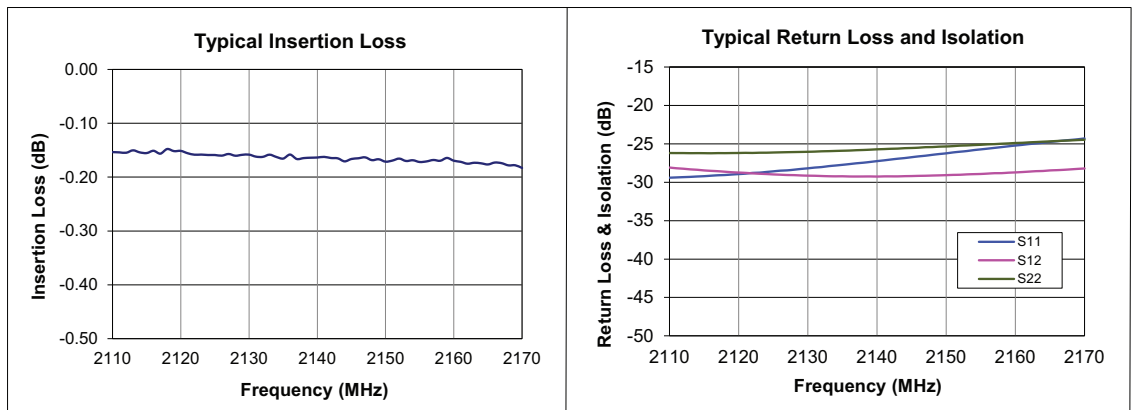

Pin	Name	Description
1	INPUT	
2	OUTPUT	
3	TERMINATED	

Package Drawing

Dimensions in millimeters (inches)

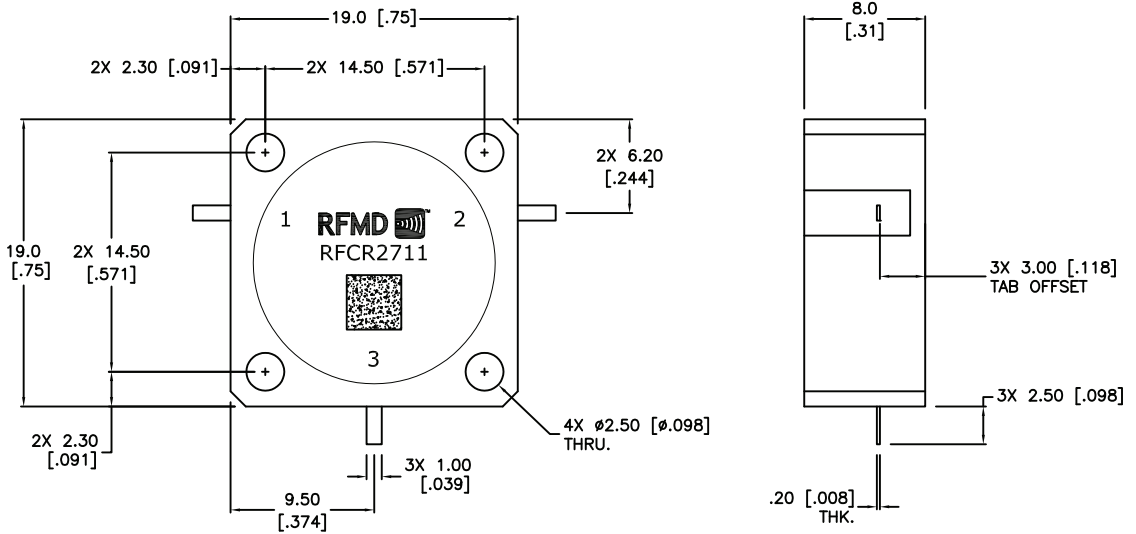

Unless otherwise specified dimensions are in mm/[inches].

Tolerances are:

Fractions	Decimals	Angles
±	.x± .3 [.01]	±0.5°
	.xx± .13 [.005]	