


Data Sheet

Features

- For GSM/EDGE applications
- Usable bandwidth 180 KHz
- Low loss
- High attenuation
- Single ended and differential operation
- Ceramic Surface Mount Package (SMP)
- Hermetic



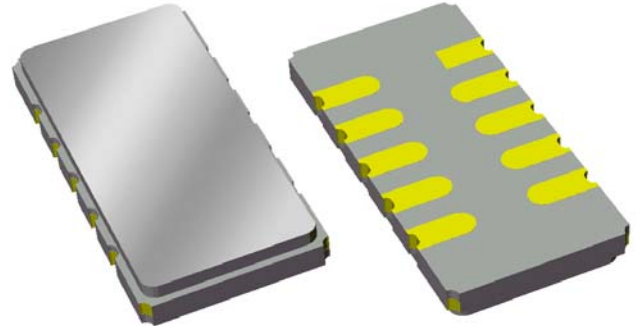


Package

Surface Mount 13.3 x 6.50 x 1.50 mm

Pin Configuration

Bottom View

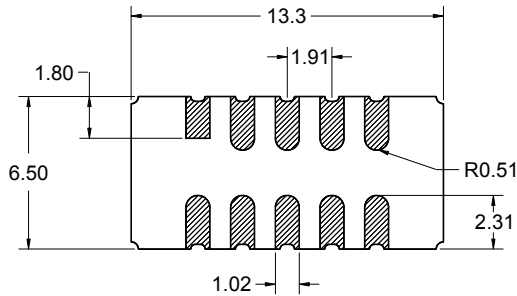

Pin No.	Description
1	Output
5	Output return
6	Input
10	Input return
2,3,4	Case ground
7,8,9	Case ground

Dimensions shown are nominal in millimeters
All tolerances are $\pm 0.15\text{mm}$ except overall
length and width $\pm 0.10\text{mm}$

Body: Al_2O_3 ceramic
Lid: Kovar, Ni plated
Terminations: Au plating 0.5 - 1.0 μm ,
over a 2 - 6 μm Ni plating

Data Sheet

Electrical Specifications ⁽¹⁾


Operating Temperature Range: ⁽²⁾ -20 to +85 °C

Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Center Frequency	-	170.6	-	MHz
Insertion Loss at Fo	-	5.59	8	dB
1 dB Lower Frequency	-	170.44	170.51	MHz
1 dB Upper Frequency	170.69	170.75	-	MHz
13 dB Lower Frequency	170.2	170.27	-	MHz
13 dB Upper Frequency	-	170.95	171.0	MHz
27 dB Lower Frequency	170.0	170.11	-	MHz
27 dB Upper Frequency	-	171.11	171.2	MHz
40 dB Lower Frequency	169.8	170.00	-	MHz
40 dB Upper Frequency	-	171.23	171.4	MHz
43 dB Lower Frequency	169.0	169.94	-	MHz
43 dB Upper Frequency	-	171.28	172.2	MHz
47 dB Lower Frequency	167.4	169.85	-	MHz
47 dB Upper Frequency	-	171.60	173.8	MHz
Amplitude Variation 170.51 - 170.69 MHz	-	0.29	1	dB p-p
Group Delay Ripple 170.51 - 170.69 MHz	-	421	1000	nsec
Minimum Rejection 171.4 - 171.6 MHz	40	-	-	dB
Input Power Level	-	-	20	dBm
Passband Input IP3	30	-	-	dBm
Input/Output VSWR	-	-	2:1	-
Optimal Source Impedance: ⁽⁴⁾	-	50	-	Ω
Optimal Load Impedance: ⁽⁴⁾	-	50	-	Ω

Notes:







1. All specifications are based on the Sawtek reference test system
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance shown

Test Circuit:

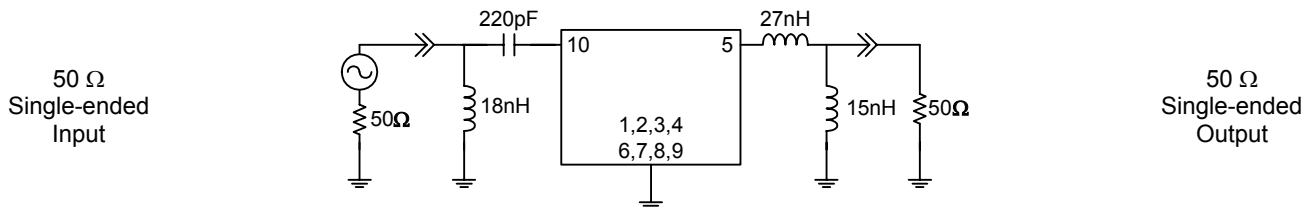


Data Sheet

Typical Performance (at +25°C)

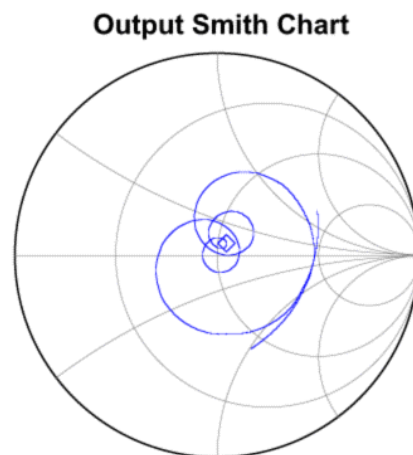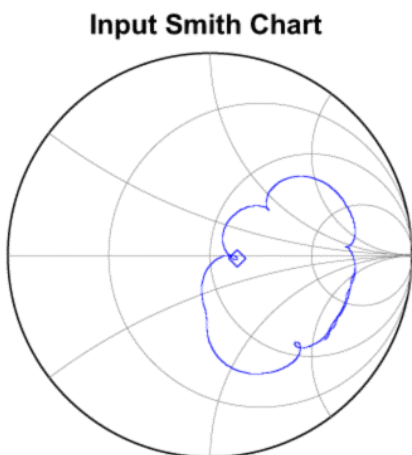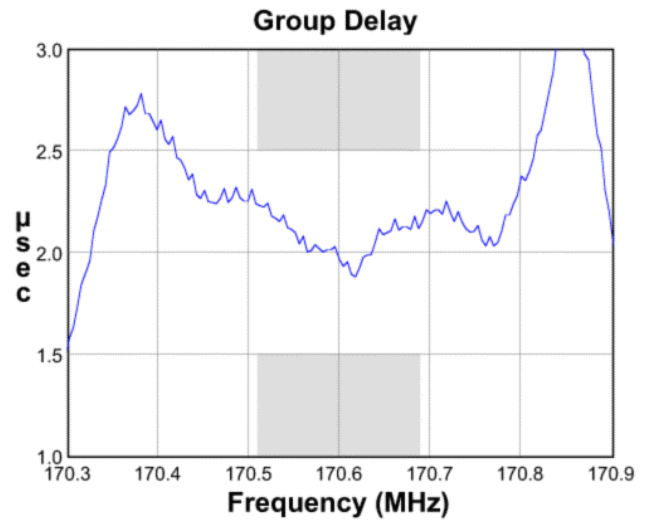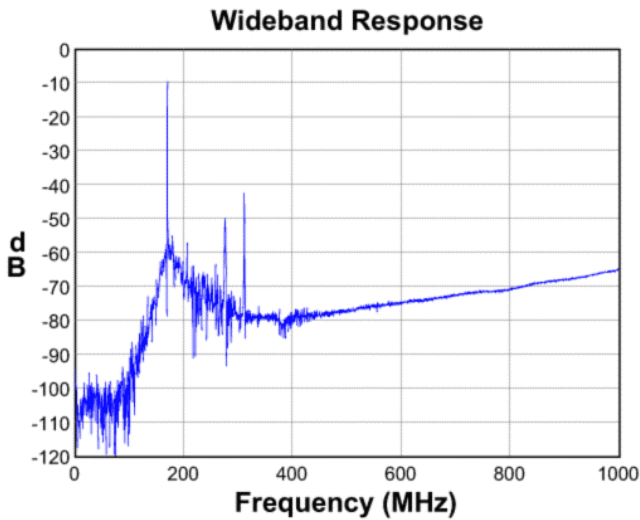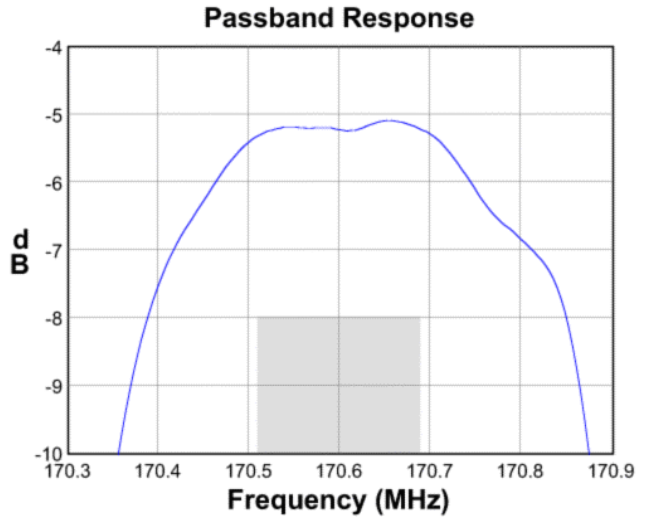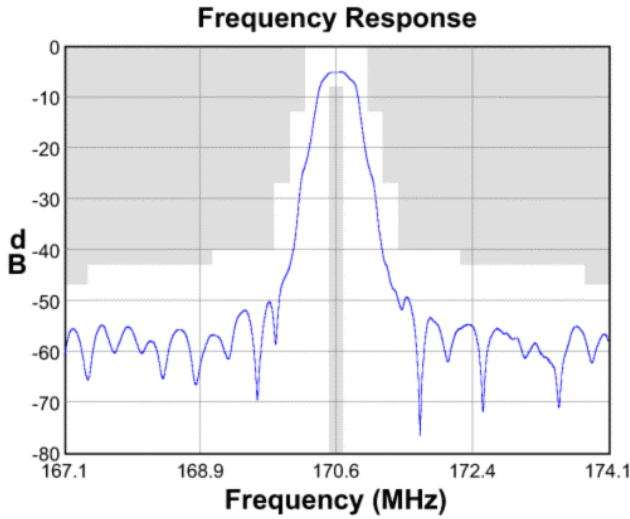


Data Sheet

Matching Schematics

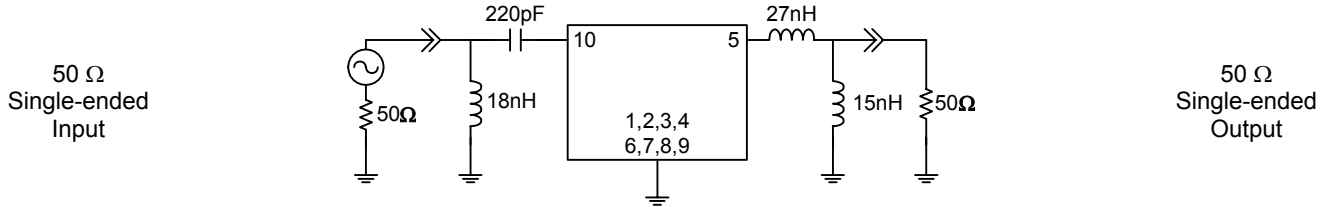


Marking

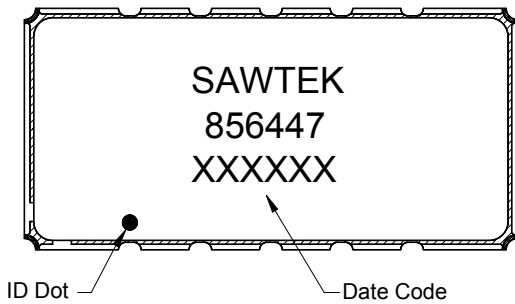



The date code consists of: day of the current year (Julian, 3 digits), last digit of the year (1 digit) and hour (2 digits)

PCB Footprint

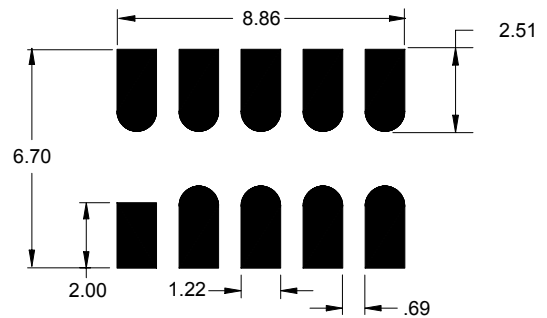

This footprint represents a recommendation only
Dimensions shown are nominal in millimeters

Tape and Reel

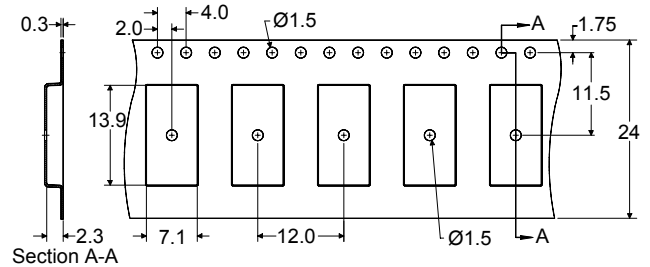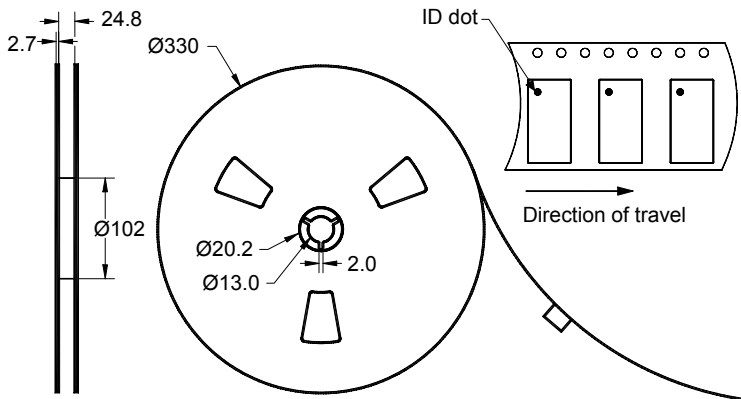


Dimensions shown are nominal in millimeters
Packaging quantity:2000 units/reel

Data Sheet

Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Unit
Operating Temperature Range	T	-20	+85	°C
Storage Temperature Range	T _{stg}	-40	+85	°C

Warnings

- Electrostatic Sensitive Device (ESD) 
- Avoid ultrasonic exposure

Material Content

- Does not contain lead (Pb) or other RoHS restricted materials

Links to Additional Technical Information

[PCB Layout Tips](#)

[Qualification Flowchart](#)

[Soldering Profile](#)

[S-Parameters](#)

[Other Technical Information](#)

Sawtek's liability is limited only to the Surface Acoustic Wave (SAW) component(s) described in this data sheet. Sawtek does not accept any liability for applications, processes, circuits or assemblies which are implemented using any Sawtek component described in this data sheet.

Contact Information



PO Box 609501
 Orlando, FL 32860-9501
 USA

Phone: +1 (407) 886-8860
 Fax: +1 (407) 886-7061
 Email: custservice@sawtek.com
 Web: www.sawtek.com

Or contact one of our worldwide
 Network of [sales offices](#),
[Representatives or distributors](#)