
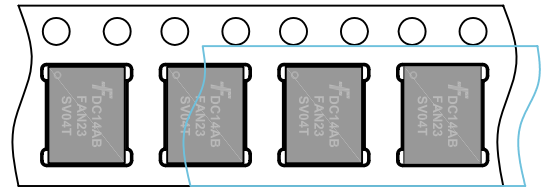


PQFN-34L-TB3 Packing Configuration: Figure 1.0

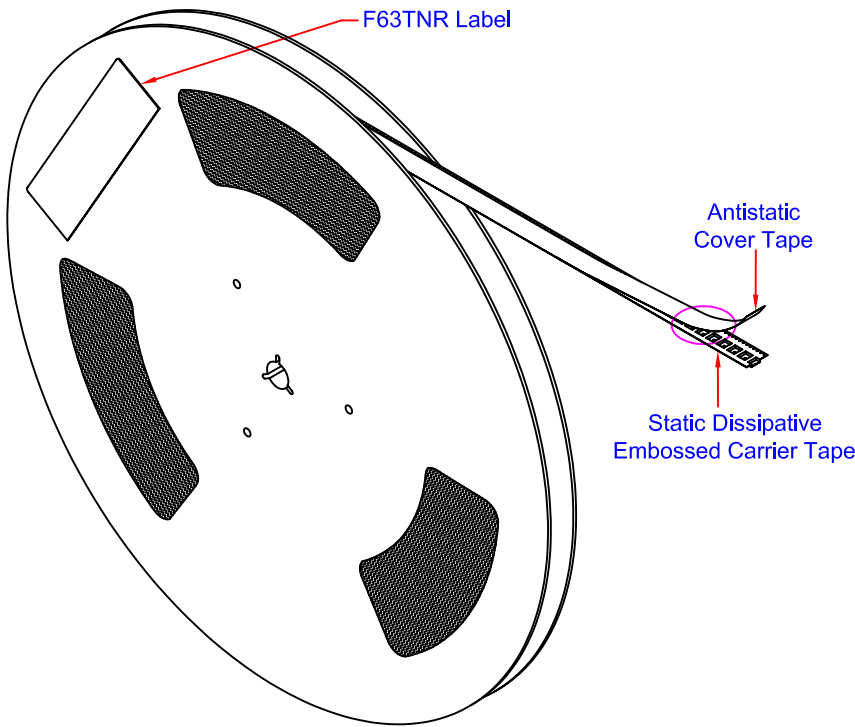


PQFN-34L-TB3 Unit Orientation

Packing Description:

PQFN-34L-TB3 parts are shipped in tape. The carrier tape is made from a conductive / dissipative (carbon filled) polycarbonate resin or polystyrene. The cover tape is a multilayer film HAA (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 13" or 330mm diameter reel. The reels are dark blue or black in color and is made of polystyrene plastic (anti-static coated).

These full reels are individually barcode labeled, and placed inside a standard box (illustrated in figure 1.0) made of recyclable corrugated brown paper. One pizza box contains two reels maximum. And these boxes are placed inside a barcode labeled shipping box which comes in different sizes depending on the number of parts shipped.

PQFN-34L-TB3 Packing information	
Packing Option	Standard (no flow code)
Packing type	TNR
Qty per Reel/Tube/Bag	3000
Reel Size	13" Dia
Box Dimension (mm)	INTR0004
Max qty per Box	6,000

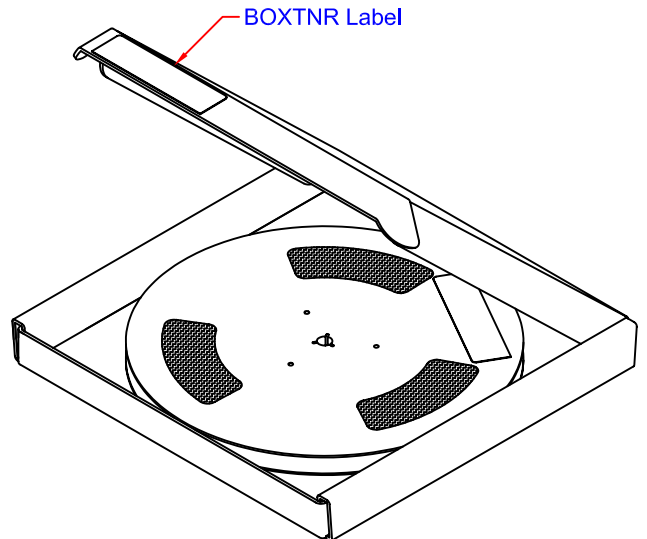


Standard Intermediate Box (INTR0004)

Barcode Label Sample


LOT: DC10324746	QTY: 3000
FSID: FAN23SV04T	SPEC:
D/C1: D1015AC QTY1:	SPEC REV: 2nd Level Interconnect
D/C2: QTY2:	1. Category G4
Green Component	2. Maximum safe temperature 260 deg C
RoHS COMPLIANT	3. MSL 1
	FAIRCHILD SEMICONDUCTOR (F63TNR) 6.1

PQFN-34L-TB3 Tape Leader and Trailer Configuration: Figure 2.0

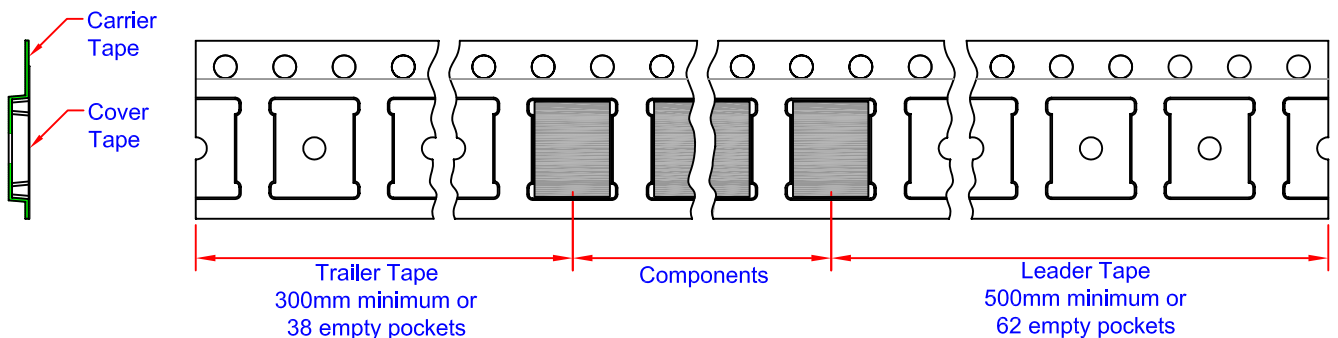

- NOTES:**
- A. ALL DIMENSION ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED
 - B. DRAWING FILE NAME: PKG-PQFN34AREV1


PQFN-34L-TB3 Embossed Carrier Tape Configuration: Figure 3.0

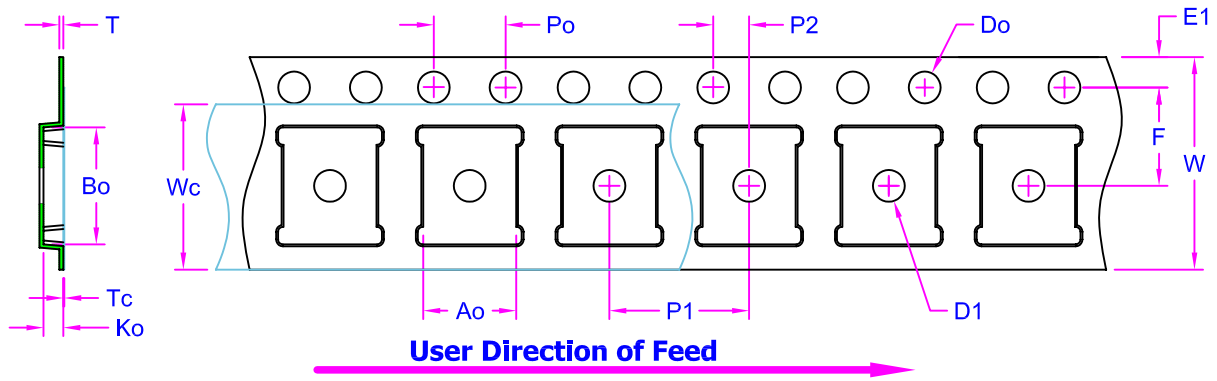


Dimensions are in millimeters

Pkg type	Ao	Bo	W	Do	D1	E1	F	P1	P2	Po	Ko	T	Wc	Tc
PQFN-34L-TB3 (12mm)	5.30 ±0.10	5.80 ±0.10	12.00 +0.20 -0.10	1.50 +0.10 -0.00	1.50 MIN	1.75 ±0.10	5.50 ±0.05	8.00 ±0.10	2.00 ±0.05	4.00 ±0.10	1.30 ±0.10	0.30 ±0.05	9.20 ±0.10	0.05 ±0.01


Notes: Ao, Bo, and Ko dimensions are determined with respect to the EIA/Jedec RS-481 rotational and lateral movement requirements (see sketches A, B, and C). Camber requirement also compliant to above mentioned standards.

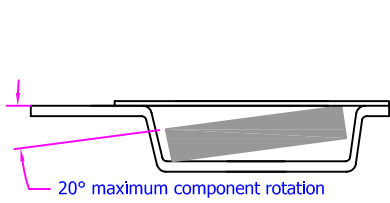

Sketch A (Side or Front Sectional View)
Component Rotation




Sketch B (Top View)
Component Rotation

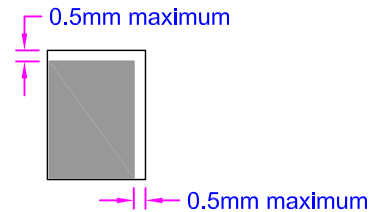

Sketch C (Top View)
Component lateral movement

PQFN-34L-TB3 Reel Configuration: Figure 4.0

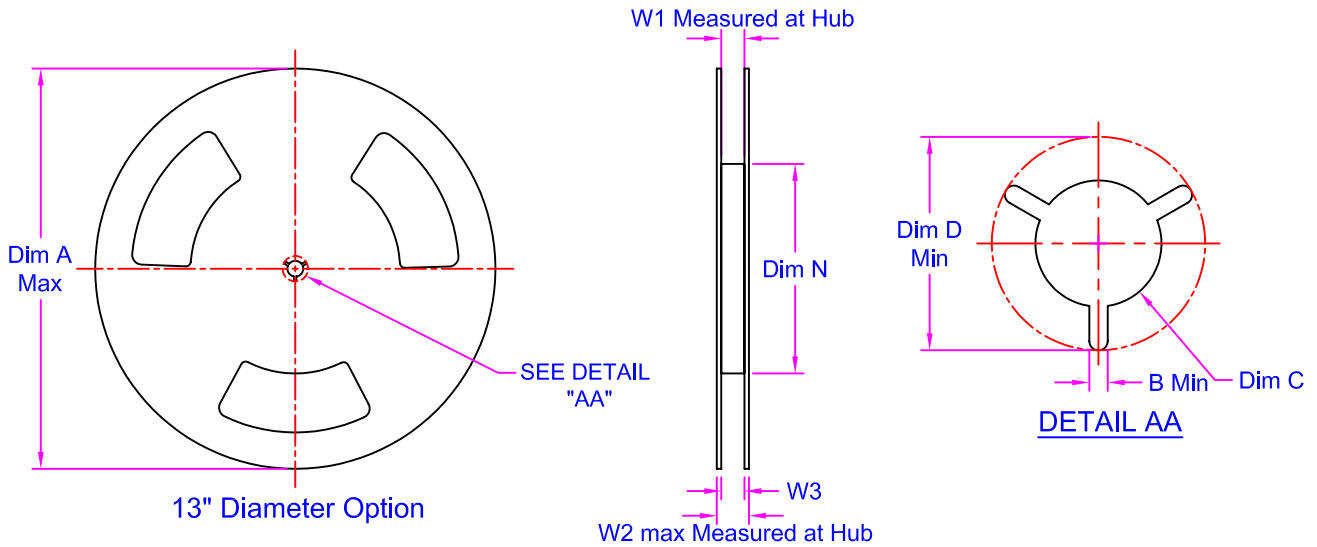

Dimensions are in millimeters

Tape Size	Reel Option	Dim A	Dim B	Dim C	Dim D	Dim N	Dim W1	Dim W2	Dim W3 (LSL-USL)
12mm	13" Dia	330	1.5	13+0.5/-0.2	20.2	178	12.4+2/-0	18.4	11.9-15.4

- NOTES:
- A. ALL DIMENSION ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED
 - B. DRAWING FILE NAME: PKG-PQFN34AREV1
 - C. PLASTIC REEL W1 DIMENSION CONTROL LIMIT OF:
8MM REEL = ±1.0MM AND 12MM REEL AND ABOVE = ±1.5MM