

Test Procedure for the NUD4001 Evaluation Board

ON Semiconductor®



8/14/2006

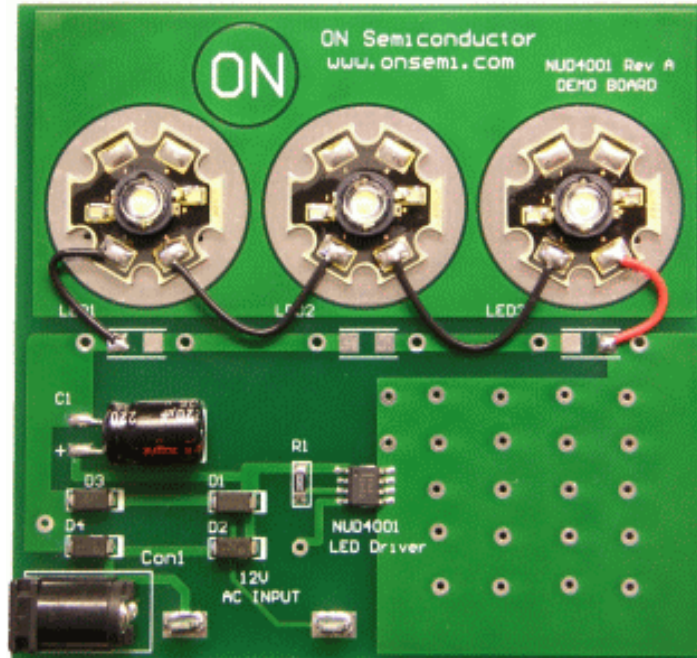


Table 1: Required Equipment

| | | |
|-----------------------|--------------------|----------------|
| AC or DC Power Supply | Digital Multimeter | Red Test Leads |
| Black Test Leads | | |

Test Procedure:

1. Apply 12 V ac or dc to the input pins.
2. The LEDs will light up.
3. Measure the current through the LEDs. It should be between 305 mA to 345 mA (325 mA typical).