


## 24-Lead Side Brazed Ceramic DIP for Hybrid [SBDIP\_H] (DH-24A)

Dimensions shown in inches and (millimeters)

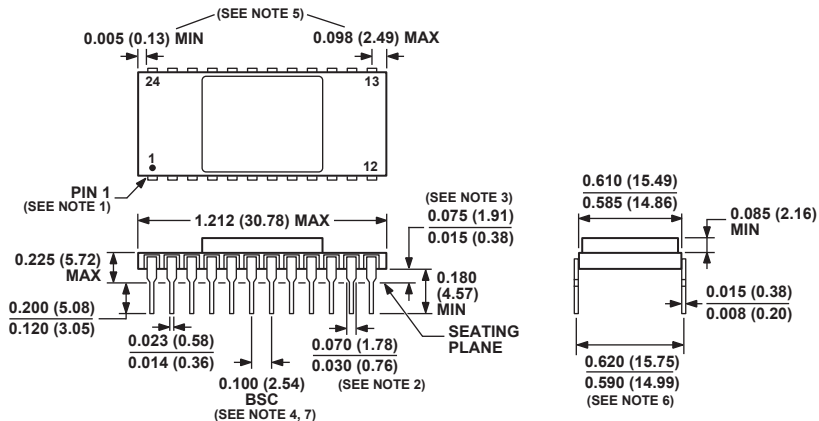

### NOTES:

- INDEX AREA; A NOTCH OR A LEAD ONE IDENTIFICATION MARK IS LOCATED ADJACENT TO LEAD ONE.
- THE MINIMUM LIMIT FOR DIMENSION MAY BE 0.023" (0.53 mm) FOR ALL FOUR CORNER LEADS ONLY.
- DIMENSION SHALL BE MEASURED FROM THE SEATING PLANE TO THE BASE PLANE.
- THE BASIC PIN SPACING IS 0.100" (2.54 mm) BETWEEN CENTERLINES.
- APPLIES TO ALL FOUR CORNERS.
- THE DIMENSION SHALL BE MEASURED AT THE CENTERLINE OF THE LEADS.
- TWENTY TWO SPACES.
- CONTROL DIMENSIONS ARE IN INCHES. MILLIMETER DIMENSIONS IN PARENTHESES ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY, AND ARE NOT APPROPRIATE FOR USE IN DESIGN.