DS-112 / DS-312



Four-Way Power Divider, 10 - 500 MHz

Rev. V5

Features

Low Loss: 0.6 dB Typical
High Isolation: 30 dB Typical
Low VSWR: 1.2:1 Typical

• Impedance: 50 Ohms Nominal

Maximum Power Rating or Input Power: 1W Max.


 Internal Load Dissipation: Ds-112 -0.05 W Max. DS-312- 0.25 Watts Max.

• MIL-STD-202 Screening Available


Description

A Power Divider is ideally a lossless reciprocal device which can also perform vector summation of two or more signals and thus is sometimes called a power combiner or summer.

C-14 (DS-312)

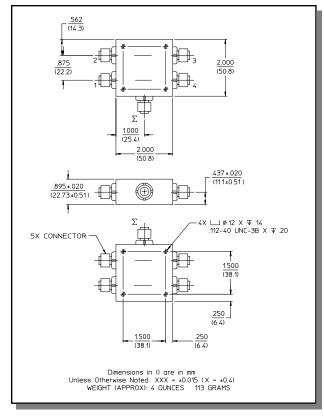

FP-5 (DS-112)

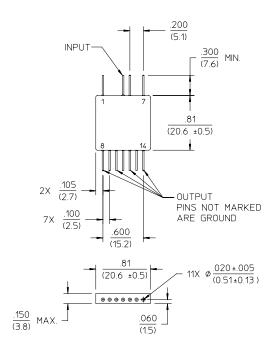

Dimensions in () are in mm Unless Otherwise Noted: .XXX = ± 0.010 (.XX = ± 0.25) .XX = ± 0.02 (.X = ± 0.5) WEIGHT (APPROX): 0.21 OUNCES 6 GRAMS

Pin Configuration (DS-112)

Pin No.	Function	Pin No.	Function	
1	GND	8	Output	
2	None	9	GND	
3	None	10	Output	
4	Input	11	GND	
5	GND	12	Output	
6	None	13	GND	
7	GND	14	Output	

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology
Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and or the transfer of a sailable.

Commitment to produce in volume is not gui

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
 China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

DS-112 / DS-312



Four-Way Power Divider, 10 - 500 MHz

Rev. V5

DS-112 Electrical Specifications¹: $T_A = -55$ °C to +85°C

Parameter	Test Conditions	Frequency	Units	Min	Тур	Max
Insertion Loss	Less Coupling	10 - 400 MHz 400 - 500 MHz	dB dB			0.75 0.85
Isolation	_	10 - 500 MHz	dB	25	_	_
Amplitude Balance	_	10 - 500 MHz	dB	_	_	0.2
Phase Balance	_	10 - 500 MHz	0	_	_	5
VSWR	All Ports	10 - 25 MHz 25 - 500 MHz	Ratio Ratio	_	_	1.5:1 1.35:1

DS-312 Electrical Specifications¹: $T_A = -55$ °C to +85°C

Parameter	Test Conditions	Frequency	Units	Min	Тур	Max
Insertion Loss	Less Coupling	10 - 400 MHz 400 - 500 MHz	dB dB			0.75 0.85
Isolation	_	10 - 500 MHz	dB	25	_	_
Amplitude Balance	_	10 - 500 MHz	dB	_	_	0.2
Phase Balance	_	10 - 500 MHz	o	_	_	2
VSWR	All Ports	10 - 400 MHz 400 - 500 MHz	Ratio Ratio			1.5:1 1.35:1

Solutions has under development. Performance is based on engineering tests. Specifications are

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not du

^{1.} All specifications apply with 50 ohm source and load impedance.

[•] India Tel: +91.80.4155721

[•] China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.




Four-Way Power Divider, 10 - 500 MHz

Rev. V5

Typical Performance Curves


Insertion Loss

Insertion Loss

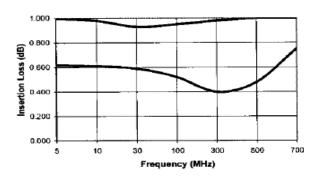


Isolation

Isolation

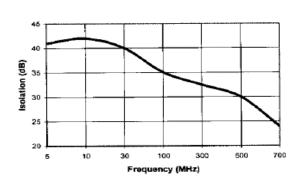

VSWR

VSWR

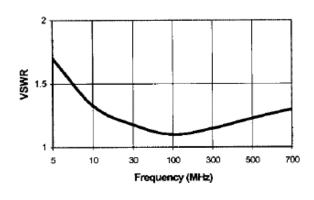

Ordering Information

Part Number	Package
DS-112 PIN	FP-2
DS-312 BNC	C-14
DS-312 TNC	C-14
DS-312 N	C-14
DS-312 SMA	C-14

Solutions has under development. Performance is based on engineering tests. Specifications are

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not du