

Open Carrier Double-Balanced Mixer For Microwave Telecommunications

Rev. V2

Features

LO & RF: 2.0 TO 10.0 GHz


IF: DC TO 2.0 GHz

LO DRIVE: +7 dBm (NOMINAL) MICROSTRIP INTERFACE

Description

The MC4107 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Product Image



Ordering Information

| Part Number | Package | |
|-------------|--------------|--|
| MC4107 | Open Carrier | |
| MC4107-2 | Open Carrier | |

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +7 dBm (Downconverter application only)

| Devemeter | December Took Conditions | | Typical | Guaranteed | |
|--|---|----------------|-------------------|-------------------|-------------------|
| Parameter Test Conditions | | Units | | +25°C | -54º to +85ºC |
| SSB Conversion Loss (max) & SSB Noise Figure (max) | fR = 4 to 8 GHz, fL = 4 to 8 GHz, fl = 0 to 1 GHz fR = 3 to 9 GHz, fL = 3 to 9 GHz, fl = 0 to 1.5 GHz fR = 2 to 10 GHz, fL = 2 to 10 GHz, fl = 0 to 2 GHz | dB dB dB | 5.7 6.7 7.3 | 6.5 7.5 8.0 | 7.0 8.0 8.5 |
| Isolation, L to R (min) | fR = 4 to 8 GHz fR = 3 to 9 GHz fR = 2 to 10 GHz | dB dB dB | 35 24 24 | 28 17 17 | 26 15 15 |
| Isolation, L to I (min) | fR = 4 to 8 GHz fR = 3 to 9 GHz fR = 2 to 10 GHz | dB dB dB | 28 22 20 | 20 15 12 | 18 13 10 |
| Isolation, R to I (min) | fL = 2 to 10 GHz | dB | 30 | | |
| 1 dB Conversion Comp. | fL = +7 dBm | dBm | +0 | | |
| Input IP3 | fR1 = 3.9 GHz at -10 dBm, fR2 = 3.92 at -10 dBm, fL = 4.2 GHz at +7 dBm fR1 = 7.4 GHz at -10 dBm, fR2 = 7.42 at -10 dBm, fL = 6.4 GHz at +7 dBm | dBm dBm | +10 +12 | | |

Commitment to produce in volume is not du

[•] North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400


[•] India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.





Open Carrier Double-Balanced Mixer For Microwave Telecommunications


Rev. V2


Typical Performance Curves

















ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

North America Tel: 800.366.2266
India Tel: +91.80.4155721
China Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.




Open Carrier Double-Balanced Mixer For Microwave Telecommunications

Rev. V2

Absolute Maximum Ratings

| Parameter | Absolute Maximum | | |
|-----------------------|--|--|--|
| Operating Temperature | -40°C to +85°C | | |
| Storage Temperature | -65°C to +100°C | | |
| Peak Input Power | +20 dBm max @ +25°C +17 dBm max @ +85°C | | |
| Peak Input Current | 50 mA DC | | |

Outline Drawing: Open Carrier * MC4107

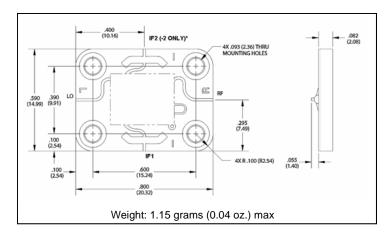

*For the base model, only the IF1 port is connected. For the "-2" model, only the IF2 port is connected.

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

Solutions has under development. Performance is based on engineering tests. Specifications are

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not d