MZ6310 / MZ6310C



Double-Balanced Mixer

Rev. V3


Features

- LO 2.5 TO 7 GHz
- RF 2.5 TO 5.5 GHz
- IF 0 TO 1.5 GHz
- LO DRIVE +10 dBm (nominal)
- MINIATURE PACKAGE
- LOW NOISE FIGURE 6.0 dB (TYP.)
- AVAILABLE WITH FIELD REPLACEABLE CONNECTORS

Description

The MZ6310 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Product Image

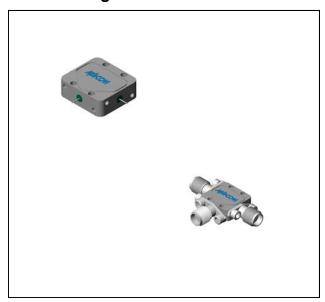

Ordering Information

Part Number	Package
MZ6310	Versapac
MZ6310C	SMA Connectorized

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +10 dBm (Downconverter application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
rarameter rest conditions		Units		+25°C	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 3 to 5.5 GHz, fL = 2.5 to 7 GHz, fI = 0 to 1.5 GHz fR = 2.5 to 3 GHz, fL = 2.5 to 4.5 GHz, fI = 0 to 1.5 GHz	dB dB	6.0 7.0	7.5 9.0	8.0 9.5
Isolation, L to R (min)	fL = 2.5 to 4 GHz fL = 4 to 7 GHz	dB dB	28 45	20 30	18 28
Isolation, L to I (min)	fL = 2.5 to 3.5 GHz fL = 3.5 to 4 GHz fL = 4 to 7 GHz	dB dB dB	18 22 35	12 18 22	10 16 20
1 dB Conversion Comp.	fL = +10 dBm	dBm	+3		
Input IP3	fR1 = 4 GHz at -10 dBm, fR2 = 4.01 GHz at -10 dBm, fL = 2.8 GHz at +10 dBm	dBm	+15		

Solutions has under development. Performance is based on engineering tests. Specifications are

typical. Mechanical outline has been fixed. Engineering samples

Commitment to produce in volume is not du

[•] North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

India Tel: +91.80.4155721
 China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

MZ6310 / MZ6310C




Double-Balanced Mixer


Rev. V3


Absolute Maximum Ratings


Parameter	Absolute Maximum		
Operating Temperature	-54° C to +100°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+23 dBm max @ +25°C +20 dBm max @ +100°C		
Peak Input Current	mA DC		


Conversion Loss vs. Frequency | F = 600 MHz | FL < FH |













Outline Drawing: Versapac

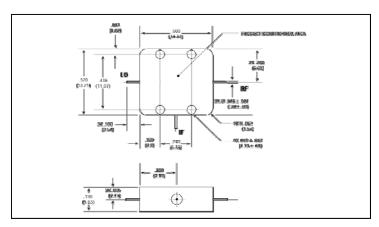


Weight: 4 grams (0.14 oz.) max


Outline Drawing: SMA Connectorized *

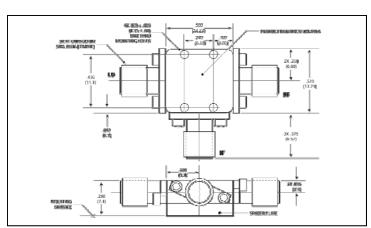

Weight: 13 grams (0.46 oz.) max

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.



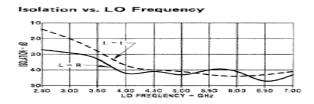

- ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
- and/or prototype measurements. Commitment to develop is not guaranteed.

 PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology
 Solutions has under development. Performance is based on engineering tests. Specifications are
 typical. Mechanical outline has been fixed. Engineering samples and on the transfer of the arms of the product of the commitment of the co
- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721 China Tel: +86.21.2407.1588

 Visit www.macomtech.com for additional data sheets and product information.

Commitment to produce in volume is not du