

**M/A-COM Products** 


Released, 30 May 07

# Radar Pulsed Power Transistor 3W, 1.2-1.4 GHz, 2ms Pulse, 20% Duty

#### Features

- NPN silicon microwave power transistors
- Common base configuration
- Broadband Class C operation
- High efficiency inter-digitized geometry
- · Diffused emitter ballasting resistors
- Gold metallization system
- · Internal input and output impedance matching
- Hermetic metal/ceramic package
- RoHS compliant

#### **Outline Drawing**

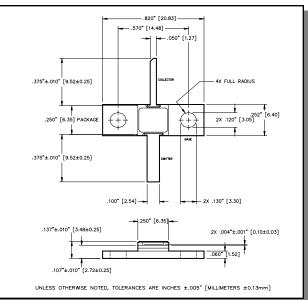

#### Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V <sub>CES</sub>	50	V
Emitter-Base Voltage	V <sub>EBO</sub>	3.5	V
Collector Current (Peak)	Ι <sub>C</sub>	1.1	А
Power Dissipation @ +25°C	P <sub>TOT</sub>	18.6	W
Storage Temperature	T <sub>STG</sub>	-65 to +200	°C
Junction Temperature	TJ	200	°C

## Electrical Specifications: T<sub>c</sub> = 25 ± 5°C (Room Ambient )

Parameter	Test Conditions	Frequency	Symbol	Min	Мах	Units
Collector-Emitter Breakdown Voltage	I <sub>C</sub> = 20mA		BV <sub>CES</sub>	50	-	V
Collector-Emitter Leakage Current	$V_{CE} = 40V$		I <sub>CES</sub>	-	2.0	mA
Thermal Resistance	Vcc = 16.5V, Pin = 0.8W	F = 1.2, 1.3, 1.4 GHz	R <sub>TH(JC)</sub>	-	9.4	°C/W
Output Power	Vcc = 16.5V, Pin = 0.8W	F = 1.2, 1.3, 1.4 GHz	P <sub>OUT</sub>	-	3.0	W
Power Gain	Vcc = 16.5V, Pin = 0.8W	F = 1.2, 1.3, 1.4 GHz	G <sub>P</sub>	5.7	-	dB
Collector Efficiency	Vcc = 16.5V, Pin = 0.8W	F = 1.2, 1.3, 1.4 GHz	η <sub>c</sub>	40	-	%
Input Return Loss	Vcc = 16.5V, Pin = 0.8W	F = 1.2, 1.3, 1.4 GHz	RL	-	-9	dB
Load Mismatch Tolerance	Vcc = 16.5V, Pin = 0.8W	F = 1.2, 1.3, 1.4 GHz	VSWR-T	-	2:1	-
Load Mismatch Stability	Vcc = 16.5V, Pin = 0.8W	F = 1.2, 1.3, 1.4 GHz	VSWR-S	-	1.5:1	-

nav be

ailable.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. **PRELIMINARY**: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are

- North America Tel: 800.366.2266 / Fax: 978.366.2266
- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
  Visit www.macomtech.com for additional data sheets and product information.

typical. Mechanical outline has been fixed. Engineering samples Commitment to produce in volume is not guaranteed.

MA-COM Technology Solutions and its effiliates reserve the right to make changes in the product is polyinformation contained herein without notice.




# Radar Pulsed Power Transistor 3W, 1.2-1.4 GHz, 2ms Pulse, 20% Duty


## M/A-COM Products Released, 30 May 07

#### **RF Test Fixture Impedance**


F (GHz)	Z <sub>IF</sub> (Ω)	Z <sub>OF</sub> (Ω)
1.2	9.4 - j7.8	8.5 + j6.9
1.3	8.8 - j7.3	9.2 + j4.9
1.4	8.1 - j7.2	5.3 + j4.7

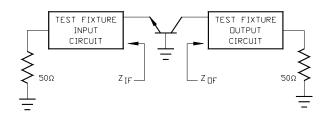

## **Test Fixture Circuit Dimensions**

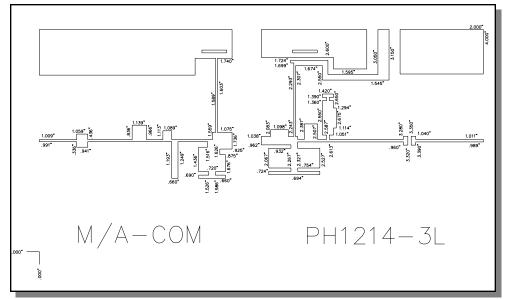

## **Test Fixture Assembly**

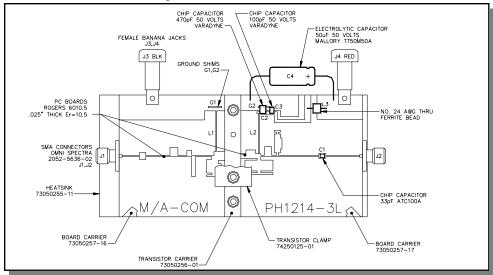

#### 2 \_

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test back on engineering tests.

- North America Tel: 800.366.2266 / Fax: 978.366.2266
- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit www.macomtech.com for additional data sheets and product information.

MA-COM Technology Solutions more and its affiliates reserve the right to make Changes to the products) or more tion contained herein without notice.