

VCO-5500S/STC

HIGH RELIABILITY MILITARY AND SPACE VCO

Package: Module, 22.86mmx22.86mmx13.97mm




Features

- 5490 MHz to 5510 MHz VCO
- 5V Operation
- +0.5dBm Typical Output Power
- -96dBc/Hz at 10kHz
- -118dBc/Hz at 100kHz

Applications

- Instrumentation
- Aerospace
- Test Equipment
- Plug and Play

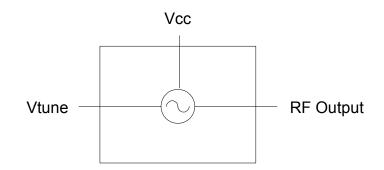

Functional Block Diagram

Product Description

RFMD's VCO-5500S/STC is a hybrid assembled voltage controlled oscillator integrated into a connectorized module. The VCO-5500 features an integrated resonator and tuning varactors. The part features excellent performance over temperature.

Ordering Information

VCO-5500S/STC High Reliability Military and Space VCO

Optimum Technology Matching® Applied ☐ GaAs HBT ☐ SiGe BiCMOS ☐ GaAs pHEMT ☐ GaN HEMT ☐ GaAs MESFET ☐ Si BiCMOS ☐ Si CMOS ☐ BIFET HBT ☐ InGaP HBT ☐ SiGe HBT ☑ Si BJT ☐ LDMOS

Thorr wife Road, Green so tro, NC 27409-74111 or sales at terimical or contact RFMD at (4 L) 336 678-5570 or sales Auryor @lfn d.com

VCO-5500S/STC



Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Voltage (V _{CC})	6.8	V
V _{TUNE}	0 to 8.0	V
Storage Temperature	-65 to 150	°C
Operating Temperature	-55 to 100	°C
ESD JESD22 - A114 Human Body Model (HBM)		V



Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.


RoHS status based on EUDirective 2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

Parameter	Specification		11:4	Condition		
Parameter	Min.	Тур.	Max.	Unit	Condition	
Frequency						
Frequency Range	5490		5510	MHz	100% Production Tested	
Tuning Voltage						
5490MHz	0	1.8		V _{DC}	100% Production Tested	
5510MHz		3.5	5	V _{DC}	100% Production Tested	
Tuning Sensitivity	9.5	13	16.5	MHz/V	100% Production Tested	
Output Power	-2.0	0.5	3.0	dBm	100% Production Tested	
Output Phase Noise						
10 kHz		-96	-90	dBc/Hz	100% Production Tested	
100 kHz		-118	-112	dBc/Hz	100% Production Tested	
Power Supply	4.75	5	5.25	V	100% Production Tested	
Supply Current		18	21	mA	100% Production Tested	
Harmonic Suppression						
2nd Harmonic		-30	-10	dBc	100% Production Tested	
3rd Harmonic		-30	-10	dBc	100% Production Tested	
Spurious (Non-Harmonic)			-80	dBc		
Frequency Pushing		0.5	2	MHz p-p	4.75V to 5.25V	
Frequency Pulling		2.5	5	MHz p-p	12dB RL	
Output Impedance		50		Ω		
3dB Modulation Bandwidth	20000	30000		kHz	$Z_G = 50\Omega$	
Tune Port Capacitance		22		pF		

Pin	Function	Description
1	VTUNE	Tuning voltage.
2	VCC	Supply voltage.
3	RF Output	VCO RF output.

Pin Out and Package Drawing

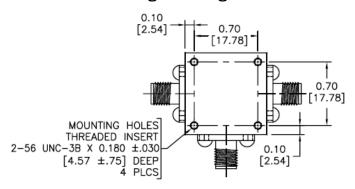

0.55

PINOUT	FUNCTION				
PIN	vco	MIXER	POWER DIVIDER		
1	TUNING VOLTAGE	RF PORT	OUT 2		
2	SUPPLY VOLTAGE	X PORT	IN		
3	RF OUTPUT	LO PORT	OUT 1		

