- Operating Range 2-V to 5.5-V V<sub>CC</sub>
- Latch-Up Performance Exceeds 250 mA Per JESD 17

### description/ordering information

The 'AHC541 octal buffers/drivers are ideal for driving bus lines or buffer memory address registers. These devices feature inputs and outputs on opposite sides of the package to facilitate printed circuit board layout.


The 3-state control gate is a two-input AND gate with active-low inputs so that if either output-enable ( $\overline{OE1}$  or  $\overline{OE2}$ ) input is high, all corresponding outputs are in the high-impedance state. The outputs provide noninverted data when they are not in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to V<sub>CC</sub> through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

SN54AHC541 J OR W PACKAGE
SN74AHC541 DB, DGV, DW, N, NS, OR PW PACKAGE
(TOP VIEW)

	(101	•••••	
OE1 [	1	J <sub>20</sub>	
A1 [ A2 [	2 3	19 18	] OE2   Y1
A3 [	4	17	] Y2
A4 [	5	16	] Y3
A5 [	6	15	] Y4
A6 [ A7 [	7 8	14 13	] Y5 ] Y6
A8 [		12	1 Y7
GND [	10	11	] Y8

SN54AHC541 ... FK PACKAGE (TOP VIEW)



### **ORDERING INFORMATION**

T <sub>A</sub>	PACKA	GE†	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	PDIP – N	Tube	SN74AHC541N	SN74AHC541N
	SOIC – DW	Tube	SN74AHC541DW	AHC541
	50IC - DW	Tape and reel	SN74AHC541DWR	AHC341
–40°C to 85°C	SOP – NS	Tape and reel	SN74AHC541NSR	AHC541
-40 C 10 85 C	SSOP – DB	Tape and reel	SN74AHC541DBR	HA541
	TSSOP – PW	Tube	SN74AHC541PW	HA541
	1330F - FW	Tape and reel	SN74AHC541PWR	HA341
	TVSOP – DGV	Tape and reel	SN74AHC541DGVR	HA541
	CDIP – J	Tube	SNJ54AHC541J	SNJ54AHC541J
–55°C to 125°C	CFP – W	Tube	SNJ54AHC541W	SNJ54AHC541W
	LCCC – FK	Tube	SNJ54AHC541FK	SNJ54AHC541FK

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters. Copyright © 2003, Texas Instruments Incorporated On products compliant to MIL-PRF-3853, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

F١	JN	СТ	ION	T	A	BL	E

	(each bu	ffer/driv	ver)
	INPUTS		OUTPUT
OE1	OE2	Α	Y
L	L	L	L
L	L	н	н
Н	Х	Х	Z
Х	Н	Х	Z

### logic diagram (positive logic)



**To Seven Other Channels** 

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

Supply voltage range, V <sub>CC</sub>		
Input voltage range, V <sub>I</sub> (see Note 1)		–0.5 V to 7 V
Output voltage range, VO (see Note 1)		–0.5 V to V <sub>CC</sub> + 0.5 V
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> < 0)		–20 mA
Output clamp current, $I_{OK}$ (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>O</sub>	с)	±20 mA
Continuous output current, $I_O (V_O = 0 \text{ to } V_{CC})$	-	±25 mA
Continuous current through V <sub>CC</sub> or GND		
Package thermal impedance, $\theta_{JA}$ (see Note 2)	): DB package	
	DGV package	
	DW package	58°C/W
	N package	69°C/W
	NS package	60°C/W
	PW package	83°C/W
Storage temperature range, T <sub>stg</sub>		–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. The package thermal impedance is calculated in accordance with JESD 51-7.



SCLS261M - DECEMBER 1995 - REVISED JULY 2003

### recommended operating conditions (see Note 3)

			SN54A	HC541	SN74A	HC541	
			MIN	MAX	MIN	MAX	UNIT
VCC	Supply voltage		2	5.5	2	5.5	V
		$V_{CC} = 2 V$	1.5		1.5		
VIH	High-level input voltage	$V_{CC} = 3 V$	2.1		2.1		V
		V <sub>CC</sub> = 5.5 V	3.85		3.85		
		$V_{CC} = 2 V$		0.5		0.5	
VIL	Low-level input voltage	$V_{CC} = 3 V$		0.9		0.9	V
		$V_{CC} = 5.5 V$		1.65		1.65	
VI	Input voltage		0	5.5	0	5.5	V
VO	Output voltage		0	VCC	0	VCC	V
		$V_{CC} = 2 V$		-50		-50	μA
ЮН	High-level output current	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		-4		-4	~^^
		$V_{CC}$ = 5 V ± 0.5 V		-8		-8	mA
		$V_{CC} = 2 V$		50		50	μA
IOL	Low-level output current	$V_{CC}$ = 3.3 V ± 0.3 V	± 0.3 V			4	mA
		$V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$		8		8	mA
A #/ A	Innut transition rise or fall rate	$V_{CC}$ = 3.3 V ± 0.3 V		100		100	<b>20</b> /1
$\Delta t/\Delta v$	Input transition rise or fall rate	$V_{CC} = 5 V \pm 0.5 V$		20		20	ns/V
TA	Operating free-air temperature	•	-55	125	-40	85	°C

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST CONDITIONS	Vaa	Т	ן = 25°C	;	SN54A	HC541	SN74A	HC541	UNIT
PARAMETER	TEST CONDITIONS	Vcc	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
		2 V	1.9	2		1.9		1.9		
	I <sub>OH</sub> = -50 μA	3 V	2.9	3		2.9		2.9		
∨он		4.5 V	4.4	4.5		4.4		4.4		V
	$I_{OH} = -4 \text{ mA}$	3 V	2.58			2.48		2.48		
	I <sub>OH</sub> = -8 mA	4.5 V	3.94			3.8		3.8		
		2 V			0.1		0.1		0.1	
	I <sub>OL</sub> = 50 μA	3 V			0.1		0.1		0.1	
VOL		4.5 V			0.1		0.1		0.1	V
	I <sub>OL</sub> = 4 mA	3 V			0.36		0.5		0.44	
	I <sub>OL</sub> = 8 mA	4.5 V			0.36		0.5		0.44	
lj	$V_{I} = 5.5 V \text{ or GND}$	0 V to 5.5 V			±0.1		±1*		±1	μA
loz†	$V_{O} = V_{CC}$ or GND, $V_{I}$ (OE) = $V_{IL}$ or $V_{IH}$	5.5 V			±0.25		±2.5		±2.5	μA
ICC	$V_{I} = V_{CC} \text{ or GND}, \qquad I_{O} = 0$	5.5 V			4		40		40	μA
Ci	$V_{I} = V_{CC} \text{ or } GND$	5 V		2	10				10	pF
Co	$V_{O} = V_{CC}$ or GND	5 V		4						pF

\* On products compliant to MIL-PRF-38535, this parameter is not production tested at  $V_{CC} = 0 V$ .

<sup>†</sup> For input and ouput, I<sub>OZ</sub> includes the input leakage current.



### SN54AHC541, SN74AHC541 **OCTAL BUFFÉRS/DRIVERS** WITH 3-STATE OUTPUTS

SCLS261M - DECEMBER 1995 - REVISED JULY 2003

### switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

00	•		7.	5	,											
PARAMETER	FROM	то	LOAD	Τ <sub>4</sub>	λ = 25°C	;	SN54A	HC541	SN74A	HC541	UNIT					
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT					
<sup>t</sup> PLH	А	Y	C <sub>I</sub> = 15 pF		5*	7*	1*	8.5*	1	8.5	ns					
<sup>t</sup> PHL	A	T	CL = 15 pr		5*	7*	1*	8.5*	1	8.5	115					
<sup>t</sup> PZH	OE	Y	C <sub>I</sub> = 15 pF		6*	10.5*	1*	11*	1	11	ns					
<sup>t</sup> PZL	ÛE	Ŷ			6*	10.5*	1*	11*	1	11	115					
<sup>t</sup> PHZ	OE	Y	Ci = 15 pF		7*	11*	1*	12*	1	12	ns					
<sup>t</sup> PLZ	OE	Y	Ι	I				0L = 15 pr		7*	11*	1*	12*	1	12	115
<sup>t</sup> PLH	А	Y	C <sub>I</sub> = 50 pF		7.5	10.5	1	12	1	12	ns					
<sup>t</sup> PHL	Α.	I	'	ſ	'	0L = 30 pi		7.5	10.5	1	12	1	12	115		
<sup>t</sup> PZH	OE	Y	$C_{\rm L} = 50  \rm pE$		8	14	1	16	1	16	ns					
<sup>t</sup> PZL	ÛE		Y $C_{L} = 50  pF$		8	14	1	16	1	16	115					
<sup>t</sup> PHZ	OE	Y	CL = 50 pF		9	15.4	1	17.5	1	17.5	ns					
<sup>t</sup> PLZ	UE				9	15.4	1	17.5	1	17.5	115					
<sup>t</sup> sk(o)			C <sub>L</sub> = 50 pF			1.5**				1.5	ns					

\* On products compliant to MIL-PRF-38535, this parameter is not production tested.

\*\* On products compliant to MIL-PRF-38535, this parameter does not apply.

### switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

	FROM	то	LOAD	T,	<b>₄ = 25°C</b>	;	SN54A	HC541	SN74A	HC541		
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT	
<sup>t</sup> PLH	А	Y	C <sub>I</sub> = 15 pF		3.5*	5*	1*	6*	1	6	20	
<sup>t</sup> PHL	A	Т	CL = 15 pr		3.5*	5*	1*	6*	1	6	ns	
<sup>t</sup> PZH	OE	Y	C <sub>I</sub> = 15 pF		4.7*	7.2*	1*	8.5*	1	8.5	ns	
<sup>t</sup> PZL	ÛE	Т	CL = 15 pr		4.7*	7.2*	1*	8.5*	1	8.5	115	
<sup>t</sup> PHZ	OE	Y	Y	C <sub>I</sub> = 15 pF		5*	7.5*	1*	8*	1	8	ns
<sup>t</sup> PLZ	ÛE			I	I	. 0[-104		5*	7.5*	1*	8*	1
<sup>t</sup> PLH	А	Y	C <sub>I</sub> = 50 pF		5	7	1	8	1	8	ns	
<sup>t</sup> PHL	A	Т	CL = 50 pr		5	7	1	8	1	8	115	
<sup>t</sup> PZH	<u></u>	Y	$C_{\rm L} = 50  \rm pE$		6.2	9.2	1	10.5	1	10.5	20	
<sup>t</sup> PZL	OE	Т	C <sub>L</sub> = 50 pF		6.2	9.2	1	10.5	1	10.5	ns	
<sup>t</sup> PHZ	OE	Y	C <sub>I</sub> = 50 pF		6	8.8	1	10	1	10	ns	
<sup>t</sup> PLZ		, T	$C_{L} = 50 \text{ pr}$		6	8.8	1	10	1	10	115	
<sup>t</sup> sk(o)			C <sub>L</sub> = 50 pF			1**				1	ns	

\* On products compliant to MIL-PRF-38535, this parameter is not production tested.

\*\* On products compliant to MIL-PRF-38535, this parameter does not apply.



SCLS261M - DECEMBER 1995 - REVISED JULY 2003

### noise characteristics, V<sub>CC</sub> = 5 V, C<sub>L</sub> = 50 pF, T<sub>A</sub> = 25°C (see Note 4)

SN74AHC541		
MAX	UNIT	
0.8	V	
-0.8	V	
	V	
	V	
1.5	V	
•	0.8	

NOTE 4: Characteristics are for surface-mount packages only.


### operating characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C

	PARAMETER		ONDITIONS	TYP	UNIT
Cpd	Power dissipation capacitance	No load,	f = 1 MHz	12	pF



SN54AHC541, SN74AHC541 OCTAL BUFFERS/DRIVERS WITH 3-STATE OUTPUTS

SCLS261M - DECEMBER 1995 - REVISED JULY 2003

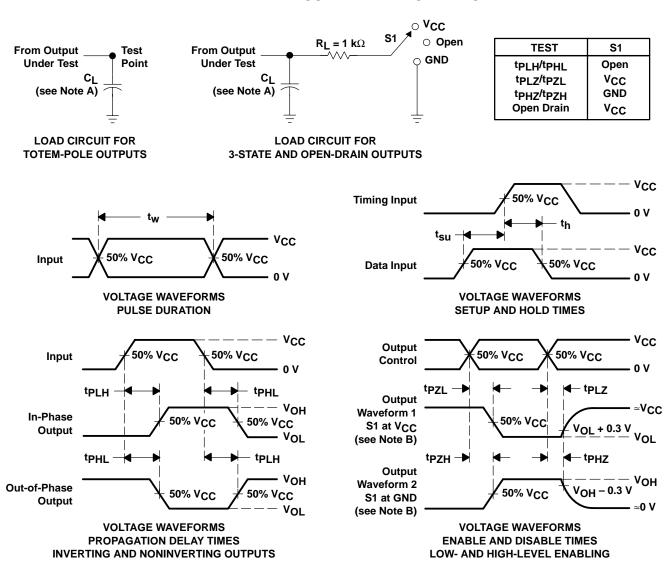

PARAMETER MEASUREMENT INFORMATION

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz, Z<sub>O</sub> = 50  $\Omega$ , t<sub>f</sub>  $\leq$  3 ns, t<sub>f</sub>  $\leq$  3 ns.
- D. The outputs are measured one at a time with one input transition per measurement.
- E. All parameters and waveforms are not applicable to all devices.

### Figure 1. Load Circuit and Voltage Waveforms



www.ti.com

15-Oct-2009

### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
5962-9685701Q2A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
5962-9685701QRA	ACTIVE	CDIP	J	20	1	TBD	A42	N / A for Pkg Type
5962-9685701QSA	ACTIVE	CFP	W	20	1	TBD	Call TI	N / A for Pkg Type
SN74AHC541DBLE	OBSOLETE	SSOP	DB	20		TBD	Call TI	Call TI
SN74AHC541DBR	ACTIVE	SSOP	DB	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DBRE4	ACTIVE	SSOP	DB	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DBRG4	ACTIVE	SSOP	DB	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DGVR	ACTIVE	TVSOP	DGV	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DGVRE4	ACTIVE	TVSOP	DGV	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DGVRG4	ACTIVE	TVSOP	DGV	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DW	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DWE4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DWG4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DWR	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DWRE4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541DWRG4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541N	ACTIVE	PDIP	Ν	20	20	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74AHC541NE4	ACTIVE	PDIP	Ν	20	20	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74AHC541NSR	ACTIVE	SO	NS	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541NSRG4	ACTIVE	SO	NS	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541PW	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541PWE4	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541PWG4	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541PWLE	OBSOLETE	TSSOP	PW	20		TBD	Call TI	Call TI
SN74AHC541PWR	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541PWRE4	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC541PWRG4	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

INSTRUMENTS

www.ti.com

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
SNJ54AHC541FK	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
SNJ54AHC541J	ACTIVE	CDIP	J	20	1	TBD	A42	N / A for Pkg Type
SNJ54AHC541W	ACTIVE	CFP	W	20	1	TBD	Call TI	N / A for Pkg Type

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN54AHC541, SN74AHC541 :

Automotive: SN74AHC541-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects





### PACKAGE MATERIALS INFORMATION

www.ti.com

Texas Instruments

### TAPE AND REEL INFORMATION

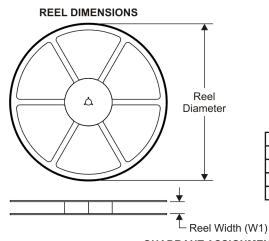

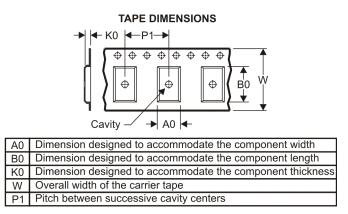

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



Device		Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AHC541DBR	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
SN74AHC541DGVR	TVSOP	DGV	20	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74AHC541DWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.0	2.7	12.0	24.0	Q1
SN74AHC541NSR	SO	NS	20	2000	330.0	24.4	8.2	13.0	2.5	12.0	24.0	Q1
SN74AHC541PWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1

TEXAS INSTRUMENTS

www.ti.com

### PACKAGE MATERIALS INFORMATION

30-Jul-2010




\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AHC541DBR	SSOP	DB	20	2000	346.0	346.0	33.0
SN74AHC541DGVR	TVSOP	DGV	20	2000	346.0	346.0	29.0
SN74AHC541DWR	SOIC	DW	20	2000	346.0	346.0	41.0
SN74AHC541NSR	SO	NS	20	2000	346.0	346.0	41.0
SN74AHC541PWR	TSSOP	PW	20	2000	346.0	346.0	33.0

J (R-GDIP-T\*\*) 14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE

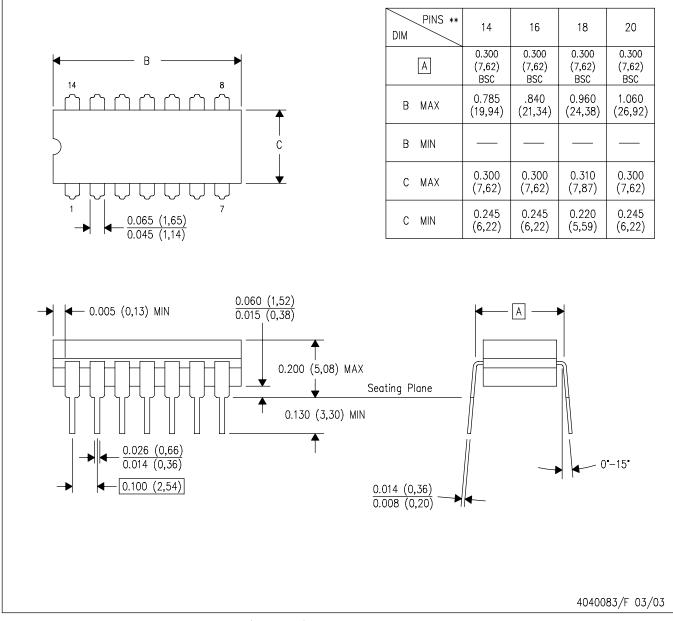


NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

W (R-GDFP-F20)

CERAMIC DUAL FLATPACK

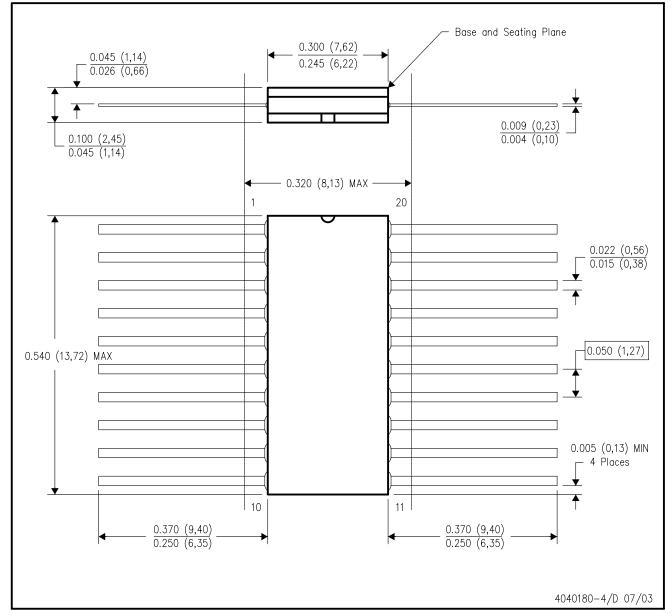

- NOTES: A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only.
  - E. Falls within Mil-Std 1835 GDFP2-F20




MLCC006B - OCTOBER 1996

### FK (S-CQCC-N\*\*)

### LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

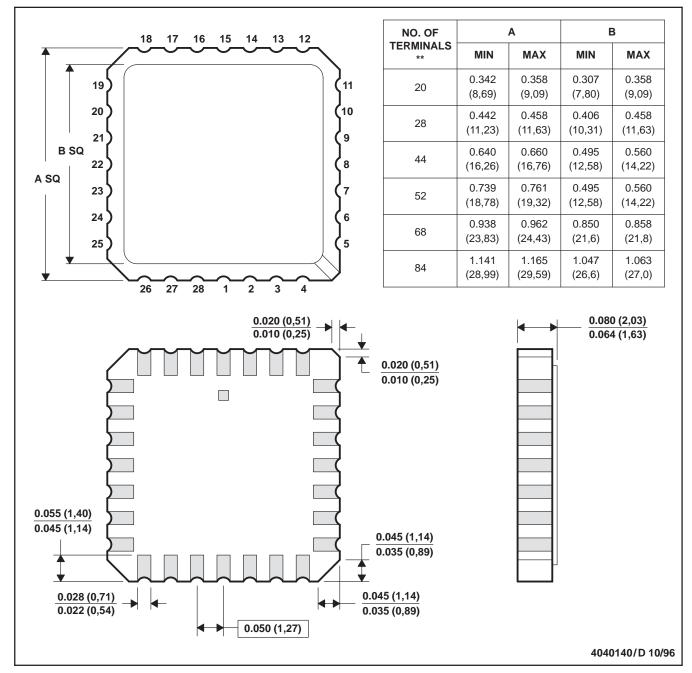

NOTES: A. All linear dimensions are in inches (millimeters).


- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. The terminals are gold plated.
- E. Falls within JEDEC MS-004



### N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN

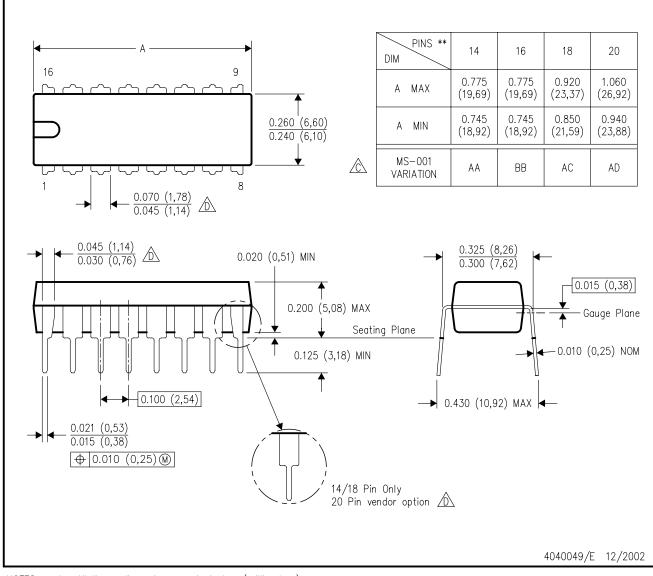

NOTES:

- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- $\triangle$  The 20 pin end lead shoulder width is a vendor option, either half or full width.




PLASTIC SMALL-OUTLINE

MPDS006C - FEBRUARY 1996 - REVISED AUGUST 2000

### DGV (R-PDSO-G\*\*)

24 PINS SHOWN

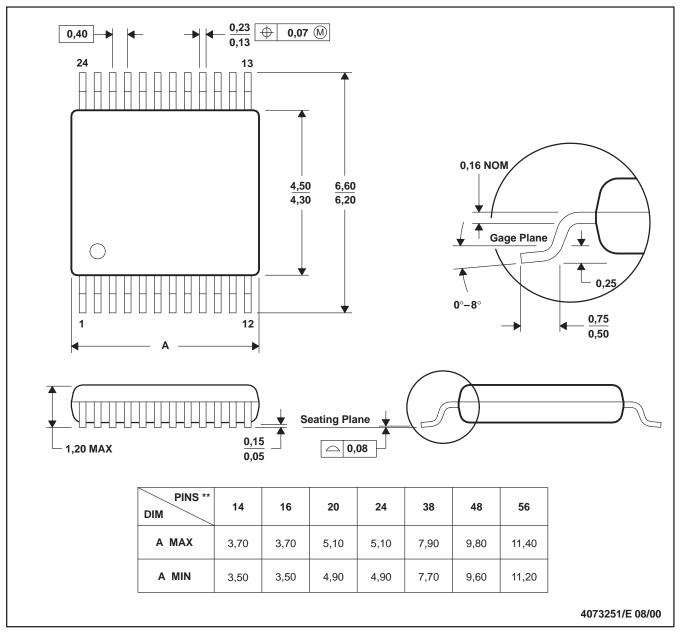

NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.


D. Falls within JEDEC: 24/48 Pins - MO-153

14/16/20/56 Pins – MO-194



DW (R-PDSO-G20)

PLASTIC SMALL-OUTLINE PACKAGE

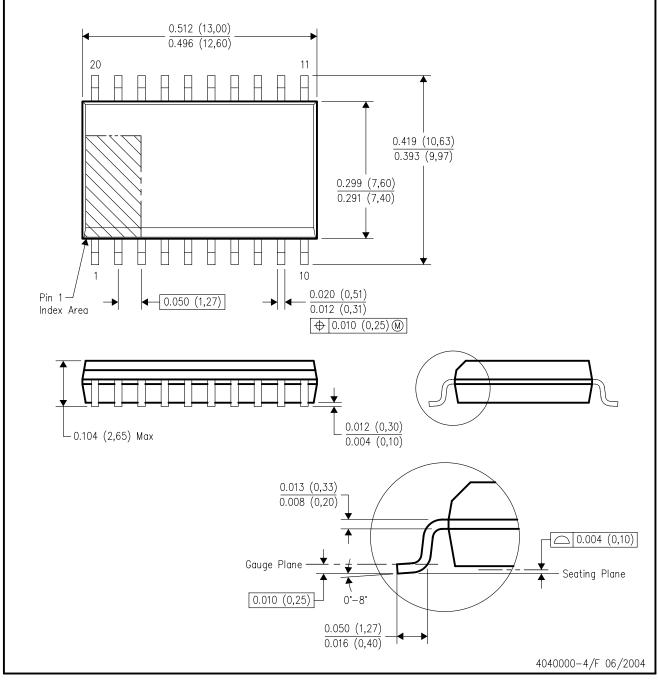

NOTES: A. All linear dimensions are in inches (millimeters).


B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).

D. Falls within JEDEC MS-013 variation AC.



### LAND PATTERN

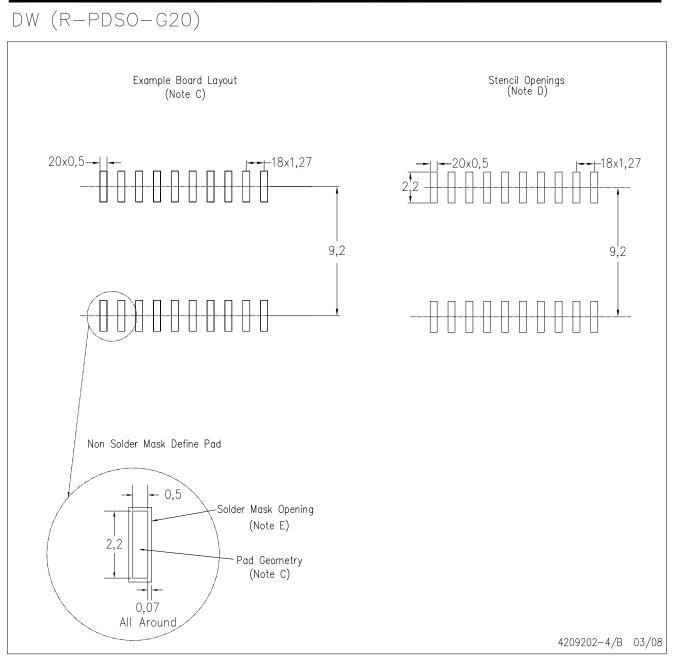

NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



### PLASTIC SMALL-OUTLINE PACKAGE

### 0,51 0,35 **⊕**0,25€ 1,27 8 14 0,15 NOM 5,60 8,20 7,40 5,00 $\bigcirc$ Gage Plane ₽ 0,25 7 1 1,05 0,55 0°-10° 0,15 0,05 Seating Plane 2,00 MAX 0,10 \_ PINS \*\* 14 16 20 24 DIM 10,50 10,50 15,30 A MAX 12,90 A MIN 9,90 9,90 12,30 14,70 4040062/C 03/03

NOTES: A. All linear dimensions are in millimeters.

NS (R-PDSO-G\*\*)

**14-PINS SHOWN** 

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.




MSSO002E - JANUARY 1995 - REVISED DECEMBER 2001

### DB (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN

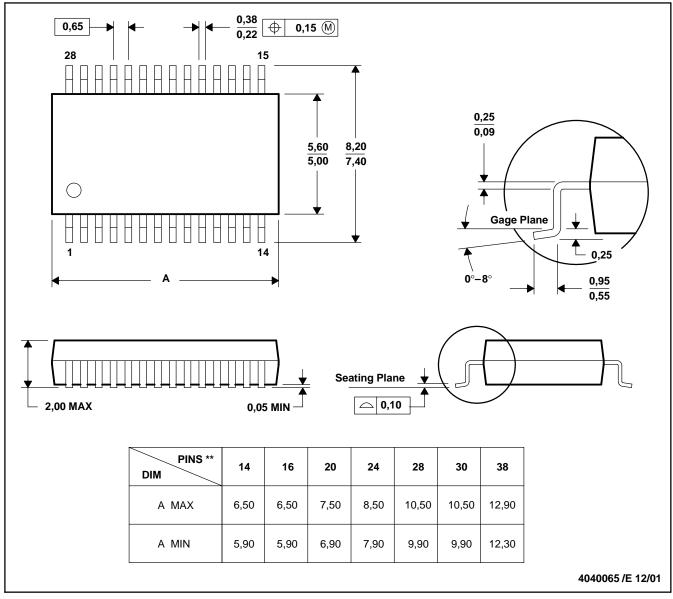

NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
- D. Falls within JEDEC MO-150




MTSS001C - JANUARY 1995 - REVISED FEBRUARY 1999

### PW (R-PDSO-G\*\*)

### PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN

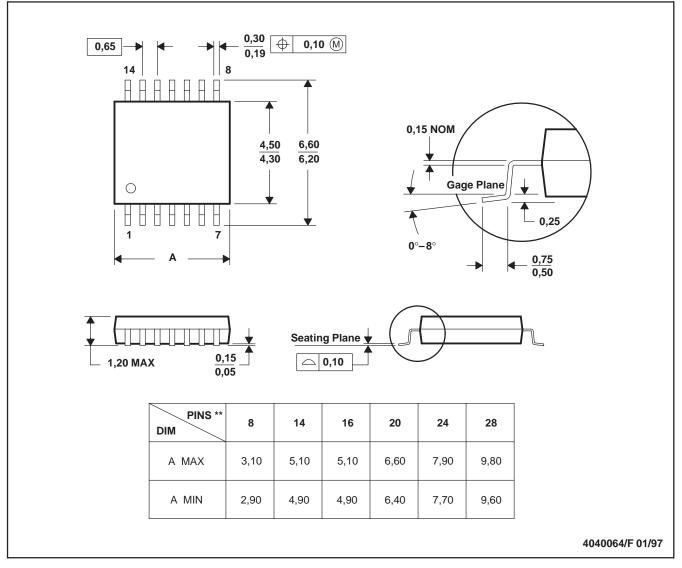

NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
- D. Falls within JEDEC MO-153



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications
DSP	dsp.ti.com	Computers and Peripherals	www.ti.com/computers
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps
Interface	interface.ti.com	Energy	www.ti.com/energy
Logic	logic.ti.com	Industrial	www.ti.com/industrial
Power Mgmt	power.ti.com	Medical	www.ti.com/medical
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless-apps

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2010, Texas Instruments Incorporated