



FAST RECOVERY GLASS PASSIVATED RECTIFIER

FR101G THRU FR107G

VOLTAGE RANGE

50 to 1000 Volts

CURRENT


1.0 Ampere

FEATURES

- Fast switching for high efficiency
- Glass passivated chip junction
- High current surge capability
- Low leakage
- High temperature soldering guaranteed
260°C/10 seconds, 0.375" (9.5mm) lead length at 5 lbs (2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.012ounce, 0.33 gram

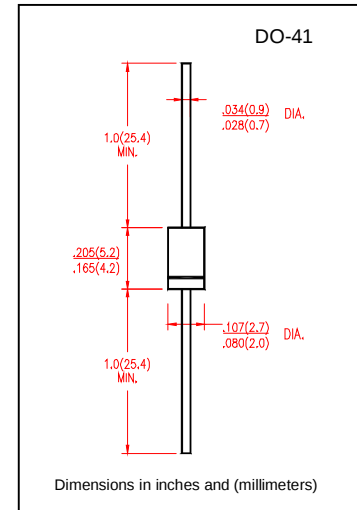

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	FR101G	FR102G	FR103G	FR104G	FR105G	FR106G	FR107G	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375 " (9.5mm) lead length at T _A =55℃		I _(AV)	1.0							Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	30							Amps
Maximum Instantaneous Forward Voltage at 1.0A		V _F	1.3							Volts
Maximum DC Reverse Current at rated DC Blocking Voltage	T _A = 25℃	I _R	5.0							μA
	T _A = 125℃		100							
Maximum Reverse Recovery Time(NOTE 3)		t _{rr}	150				250	500		nS
Typical Junction Capacitance (NOTE 1)		C _J	15							pF
Typical Thermal Resistance (NOTE 2)		R _{0JA}	50							℃/W
Operating Temperature Range		T _J	(-55 to +150)							℃
Storage Temperature Range		T _{STG}	(-55 to +150)							℃

Notes:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
2. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, P.C board mounted.
3. Test conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$.



FAST RECOVERY GLASS PASSIVATED RECTIFIER

FR101G THRU FR107G

VOLTAGE RANGE 50 to 1000 Volts
CURRENT 1.0 Ampere

RATING AND CHARACTERISTIC CURVES FR101G THRU FR107G

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

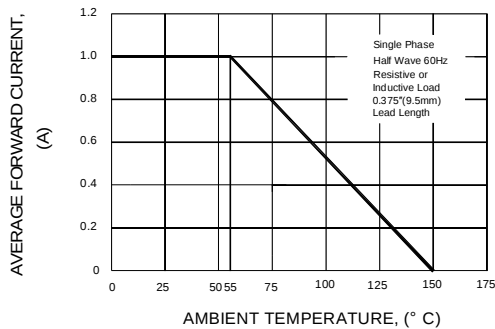


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

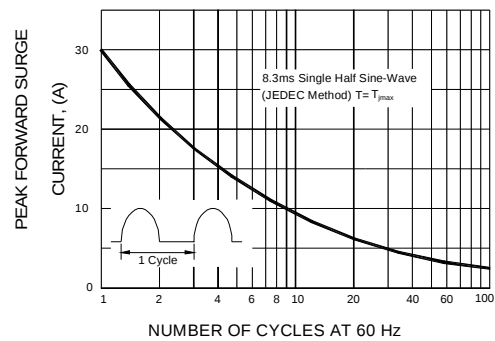


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

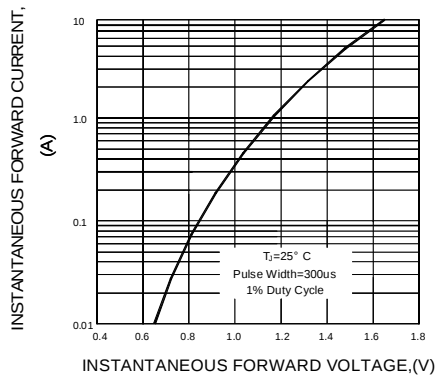


FIG.4-TYPICAL REVERSE CHARACTERISTICS

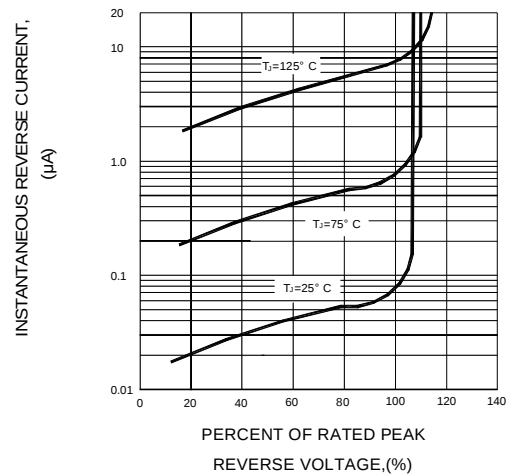


FIG.5-TYPICAL JUNCTION CAPACITANCE


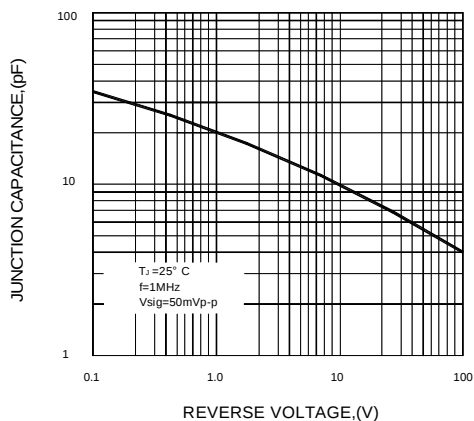


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

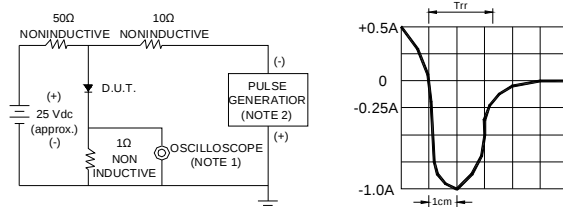

NOTES : 1. Rise Time=7ns max. Input Impedance= 1 magohm, 22pF
2. Rise time=10ns max. Source Impedance= 50 ohms

SET TIME BASE FOR 50/100ns/cm