

MITSUBISHI <MOSFET MODULE>

FM600TU-3A

HIGH POWER SWITCHING USE
INSULATED PACKAGE

FM600TU-3A



- ID(rms)300A
- VDSS..... 150V
- Insulated Type
- 6-elements in a pack
- Thermistor inside
- UL Recognized

Yellow Card No.E80276
File No.E80271


APPLICATION

AC motor control of forklift (battery power source), UPS

OUTLINE DRAWING & CIRCUIT DIAGRAM



Dimensions in mm

www.BDTIC.com/MITSUBISHI

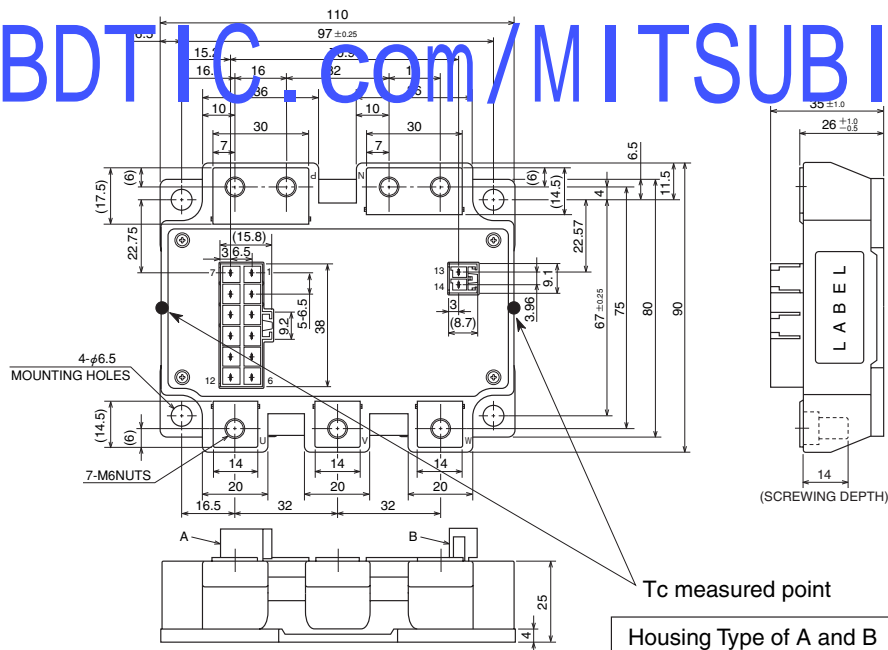

Tc measured point
Housing Type of A and B
(Tyco Electronics P/N:)
A: 917353-1
B: 179838-1

CIRCUIT DIAGRAM

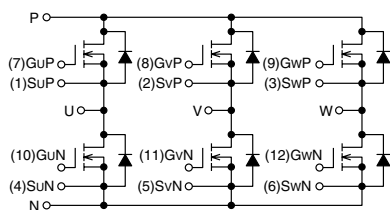

(1)SuP	(2)SvP	(3)SwP	(4)SuN	(5)SvN	(6)SwN	A
(7)GuP	(8)GvP	(9)GwP	(10)GuN	(11)GvN	(12)GwN	A
(13)TH1	(14)TH2					B

FM600TU-3A

**HIGH POWER SWITCHING USE
INSULATED PACKAGE**

ABSOLUTE MAXIMUM RATINGS (Tch = 25°C unless otherwise specified.)

Symbol	Item	Conditions	Ratings	Unit
V _{DSS}	Drain-source voltage	G-S Short	150	V
V _{GSS}	Gate-source voltage	D-S Short	±20	V
I _D	Drain current	T _C ' = 114°C*3	300	A
I _{DM}		Pulse*2	600	A
I _{DA}	Avalanche current	L = 10μH Pulse*2	300	A
I _S *1	Source current		300	A
I _{SM} *1		Pulse*2	600	A
P _D *4	Maximum power dissipation	T _C = 25°C	960	W
P _D *4		T _C ' = 25°C*3	1300	W
T _{ch}	Channel temperature		-40 ~ +150	°C
T _{stg}	Storage temperature		-40 ~ +125	°C
V _{iso}	Isolation voltage	Main terminal to base plate, AC 1 min.	2500	V
—	Mounting torque	Main Terminal M6	3.5 ~ 4.5	N • m
		Mounting M6	3.5 ~ 4.5	N • m
—	Weight	Typical value	600	g

ELECTRICAL CHARACTERISTICS (Tch = 25°C unless otherwise specified.)

Symbol	Item	Conditions	Limits			Unit	
			Min.	Typ.	Max.		
I _{DSS}	Drain cutoff current	V _{DS} = V _{DSS} , V _{GS} = 0V	—	—	1	mA	
V _{GS(th)}	Gate-source threshold voltage	I _D = 30mA, V _{DS} = 10V	4.7	6	7.3	V	
I _{GSS}	Gate leakage current	V _{GS} = V _{GSS} , V _{DS} = 0V	—	—	1.5	μA	
r _{DS(ON)}	Static drain-source (chip) On-state resistance	I _D = 300A V _{GS} = 15V	T _{ch} = 25°C	—	1.6	2.2	mΩ
			T _{ch} = 125°C	—	3.0	—	
V _{DS(ON)}	Static drain-source (chip) On-state voltage	I _D = 300A V _{GS} = 15V	T _{ch} = 25°C	—	0.8	1.66	V
			T _{ch} = 125°C	—	0.9	—	
R _(lead)	Lead resistance	I _D = 300A terminal-chip	T _{ch} = 25°C	—	0.7	—	mΩ
			T _{ch} = 125°C	—	1.0	—	
C _{iss}	Input capacitance	V _{DS} = 10V	—	—	110	nF	
C _{oss}	Output capacitance	V _{GS} = 0V	—	—	15		
C _{rss}	Reverse transfer capacitance		—	—	10		
Q _G	Total gate charge	V _{DD} = 80V, I _D = 300A, V _{GS} = 15V	—	1950	—	nC	
t _{d(on)}	Turn-on delay time	V _{DD} = 80V, I _D = 300A, V _{GS1} = V _{GS2} = 15V R _G = 4.2Ω, Inductive load switching operation I _S = 300A	—	—	400	ns	
t _r	Turn-on rise time		—	—	400		
t _{d(off)}	Turn-off delay time		—	—	500		
t _f	Turn-off fall time		—	—	400		
t _{rr} *1	Reverse recovery time		—	—	200		
Q _{rr} *1	Reverse recovery charge		—	8.0	—		μC
V _{SD} *1	Source-drain voltage	I _S = 300A, V _{GS} = 0V	—	—	1.3	V	
R _{th(ch-c)}	Thermal resistance	MOSFET part (1/6 module)*7	—	—	0.13	°C/W	
R _{th(ch-c')}		MOSFET part (1/6 module)*3	—	—	0.096		
R _{th(c-f)}	Contact thermal resistance	Case to fin, Thermal grease Applied*8 (1/6 module)	—	0.1	—		
R _{th(c'-f)}		Case to fin, Thermal grease Applied*3, *8 (1/6 module)	—	0.09	—		

THERMISTOR PART

Symbol	Parameter	Conditions	Limits			Unit
			Min.	Typ.	Max.	
R _{TH} *6	Resistance	T _{TH} = 25°C*5	—	100	—	kΩ
B*6	B Constant	Resistance at T _{TH} = 25°C, 50°C*5	—	4000	—	K







*1: It is characteristics of the anti-parallel, source to drain free-wheel diode (FWDi).
 *2: Pulse width and repetition rate should be such that the device channel temperature (T_{ch}) does not exceed T_{ch} max rating.
 *3: T_C' measured point is just under the chips. If use this value, R_{th(f-a)} should be measured just under the chips.
 *4: Pulse width and repetition rate should be such as to cause negligible temperature rise.
 *5: T_{TH} is thermistor temperature.
 *6: B = (lnR1 - lnR2)/(1/T1 - 1/T2) R1: Resistance at T1(K), R2: Resistance at T2(K)
 *7: T_C measured point is shown in page OUTLINE DRAWING.
 *8: Typical value is measured by using Shin-Etsu Chemical Co., Ltd "G-746".



FM600TU-3A

HIGH POWER SWITCHING USE
INSULATED PACKAGE

PERFORMANCE CURVES

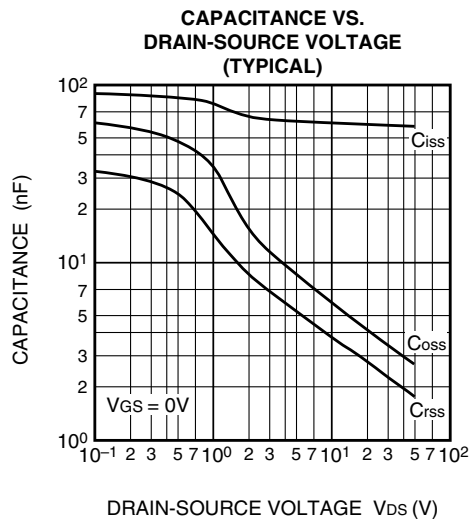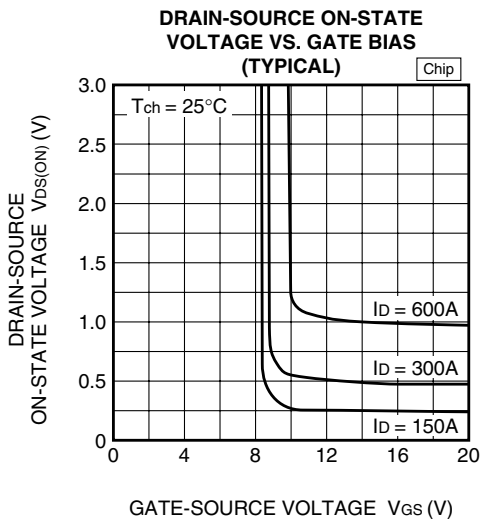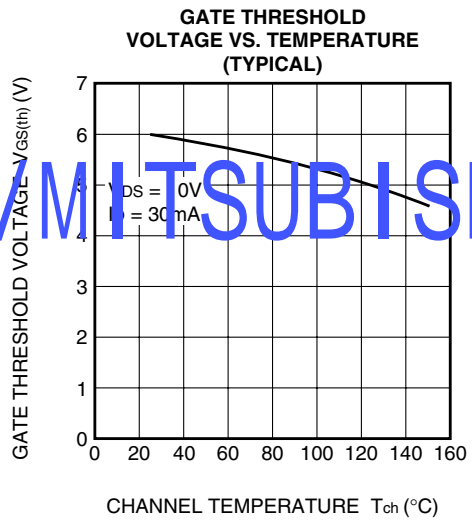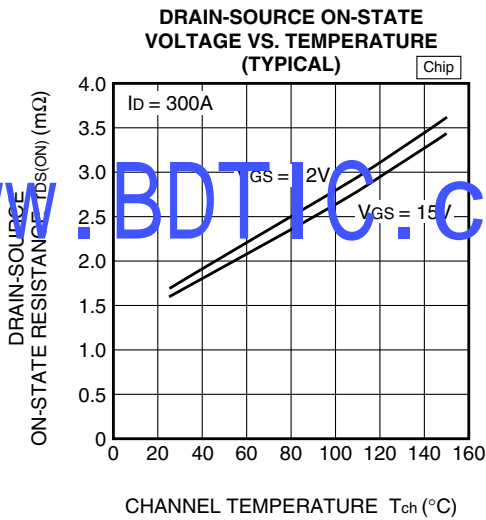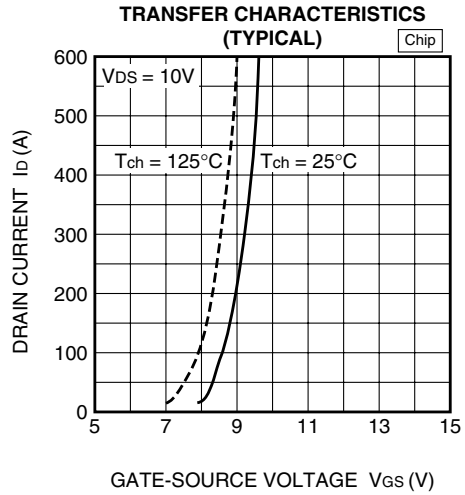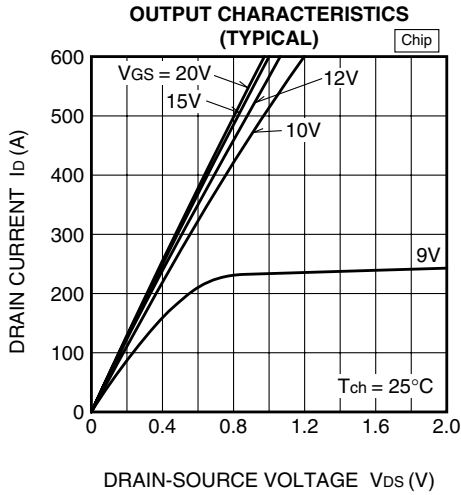


www.BDTIC.com/MITSUBISHI


FM600TU-3A

HIGH POWER SWITCHING USE
INSULATED PACKAGE


GATE CHARGE CHARACTERISTICS (TYPICAL)

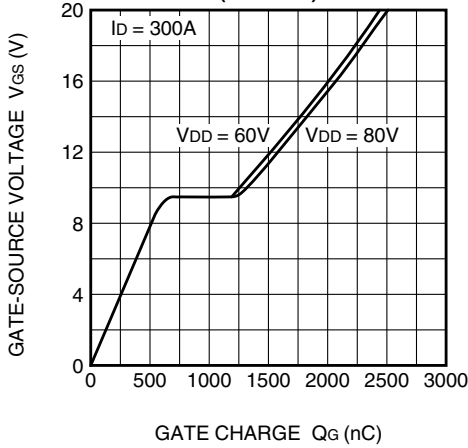


FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

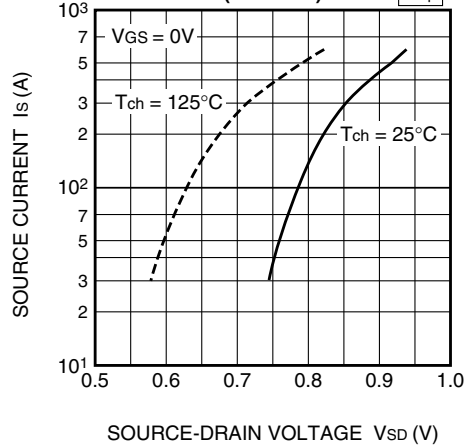


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)

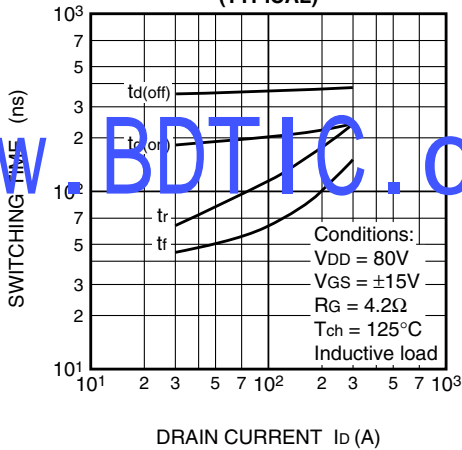


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)

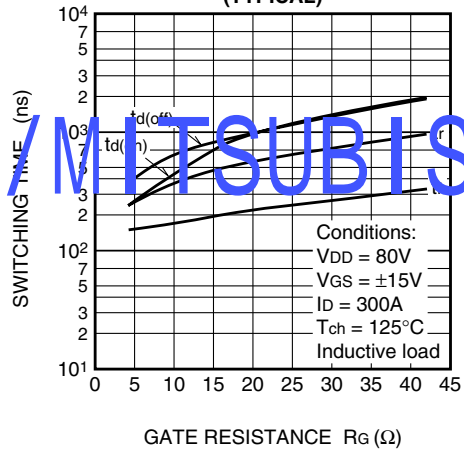

HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)

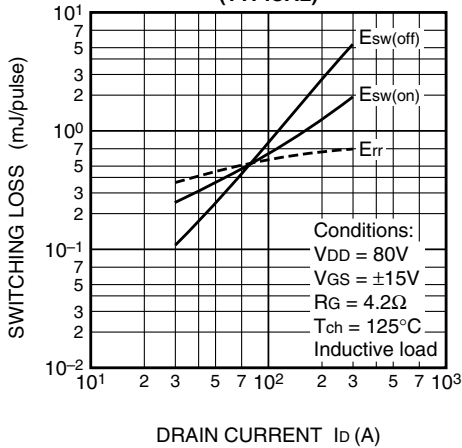

HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)

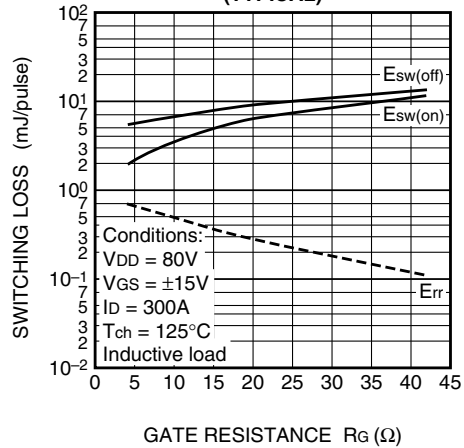


www.BDTIC.com/MITSUBISHI


FM600TU-3A

HIGH POWER SWITCHING USE
INSULATED PACKAGE

REVERSE RECOVERY CHARACTERISTICS
OF FREE-WHEEL DIODE
(TYPICAL)

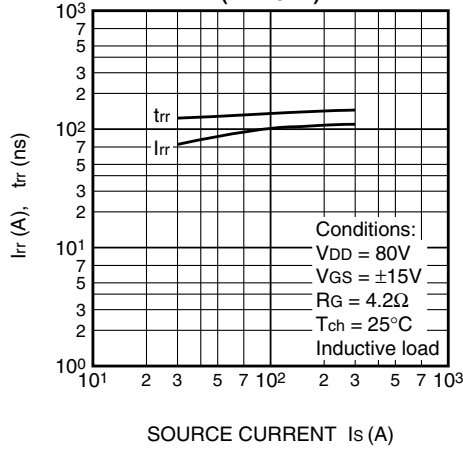

TRANSIENT THERMAL
IMPEDANCE CHARACTERISTICS

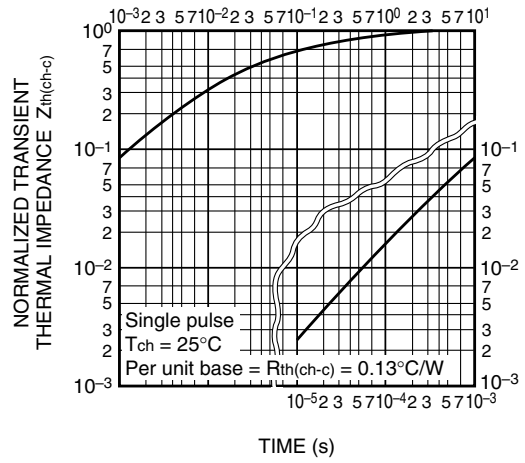

CHIP LAYOUT

www.BDTIC.com/MITSUBISHI

